



Restrained Plugs And Receptacles

PS & PL Range



Pioneering the Difference.



LETTER FROM THE DIRECTORS OF AUSPROOF PTY LTD

Dear Customer

We are an Australian company that manufactures and exports a full range of high voltage bolted couplers around the world.

With more than 40 years' experience and an extensive Research and Development department we are well known for the advancement our designs have improved the safety and reliability in the mining industry.

Simply putting it; *Gone are the days where people and property are at risk from exploding couplers.*

Today, because of our passion for safety, reliability and quality, our products are recognized as the World's Best.

The above pedigree was the reason we were approached by numerous mines to design and develop a new advanced range of low voltage restrained plugs and receptacles.

This new stainless steel design is fully compliant to Australian and International Standards:

AS/NZS 1299:2009

AS/NZS 60079.0:2012

AS/NZS 60079.1:2015

And will directly interchange with all existing operations.

The restrained plug and receptacle range is suitable for use in mining and commercial applications such as Group 1 hazardous mining operations, Metalliferous mines and tunnelling projects; applicable up to 3300 Volts.

In this period, with a dark cloud on the horizon, it has been an uplifting and exciting privilege to deliver our range to you.

Phillip Marks
Wendy Marks
Frank Lantry
Aston Marks

AUSPROOF

Index

Description

Page No.

Letter From Directors.....01

660V Series;

660V 150A 4 Pin03

660V 300A 4 Pin05

660V 425A 4 Pin07

1100V Series;

1100V 150A 4 Pin09

1100V 300A 4 Pin11

1100V 425A 4 Pin13

1100V 300A 6 Pin15

1100V 425A 6 Pin17

3300V Series;

3300V 300A 4 Pin19

3300V 425A 4 Pin21

3300V 300A 6 Pin23

3300V 425A 6 Pin25

Termination Procedures;

660V 150A / 1100V 150A27

660V 300A / 660V 425A / 1100V 300A / 1100V 425A29

1100V 300A / 1100V 425A / 3300V 300A / 3300V 425A31

3300V 300A / 3300V 42533

Accessories;

150A Accessories35

300A Accessories36

Handling;

150A Handling37

300A Handling38

Receptacle Mounting

150A Mounting39

300A Mounting40

Flamepath Detail

150A Flamepath Detail41

300A Flamepath Detail42


Care and Maintenance43

Locking Device Locations.....44

Plug Identification Labels45

Receptacle Identification Labels46


Glossary.....47

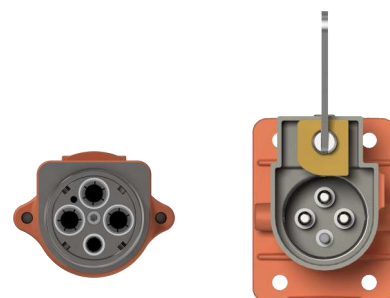

Pilot Orientation

Pre-Built To Suit Cable Type

TYPE: P614
(Not for Purchasing Use)

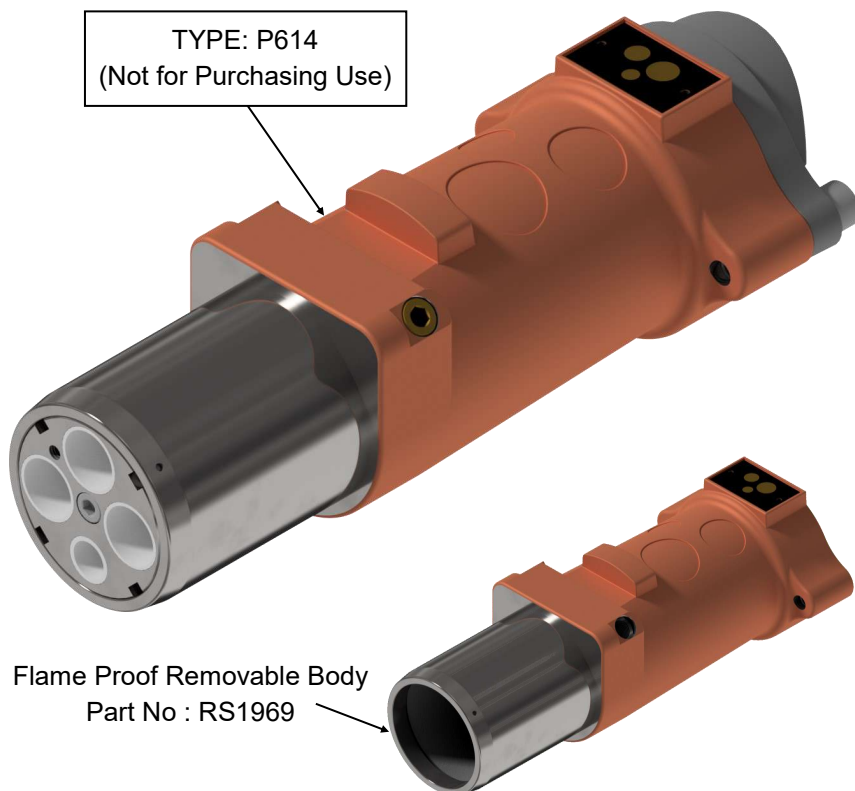


Flame Proof Removable Body
Part No : RS1969


Plug Type To Suit Cable Type		
(mm ²)	*Ref.	241.1
25	(E)	RS1392
35	(F)	RS1393
50	(G)	RS1394
70	(H)	RS1395
95	(I)	RS1396

*Gland Reference Letter

Part Breakdown For Customized Cables; One Of Each Type Required

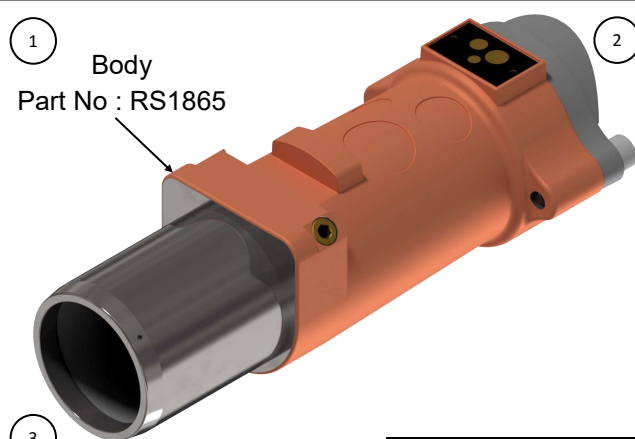

12 / 20 Style Contact Sets		
(mm ²)	ID (mm)	Part No.
25	7.5	RS1597
35	9.0	RS1598
50	10.5	RS1599
70	12.5	RS1600
95	14.0	RS1601

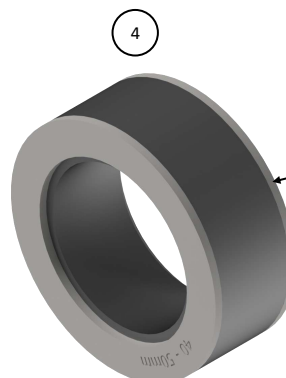


Compression Gland Type		
*Ref.	Gland ID	Part No.
(A)	10-15	RS2179
(B)	15-20	RS2180
(C)	20-25	RS2181
(D)	25-30	RS2182
(E)	35-40	RS1592
(F)	40-45	RS1593
(G)	45-50	RS1594
(H)	50-55	RS1595
(I)	55-60	RS1596

*Gland Reference Letter

TYPE: QRR614
(Not for Purchasing Use)


Body
Part No : RS1866QR

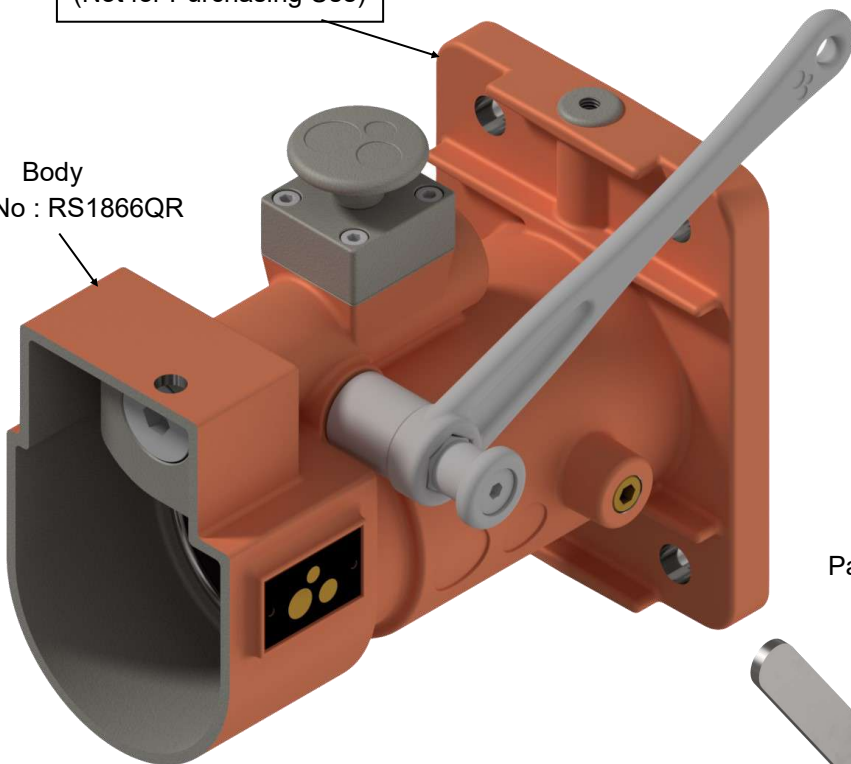

Receptacle Type to Suit mm² Cable Tails		
(mm²)	(Jack In) Part No.	(Quick Release) Part No.
25	RS1397	RS1397QR
35	RS1398	RS1398QR
50	RS1399	RS1399QR
70	RS1400	RS1400QR
95	RS1401	RS1401QR

TYPE: R614
(Not for Purchasing Use)

Body
Part No : RS1866

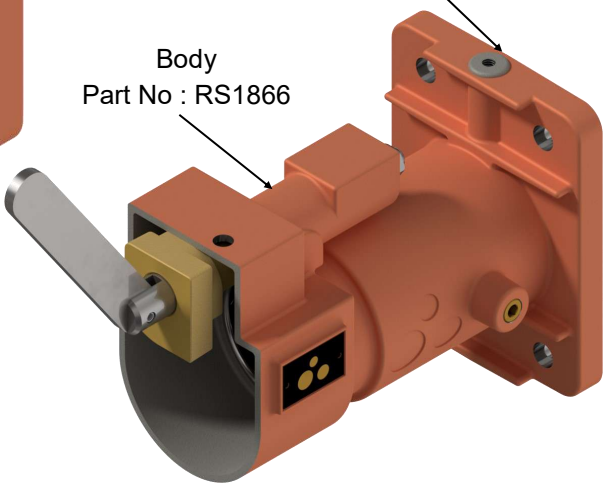

12 / 68 Style Contact Sets		
(mm²)	ID (mm)	Part No.
25	7.5	RS1612
35	9.0	RS1613
50	10.5	RS1614
70	12.5	RS1615
95	14.0	RS1616



Cage Assembly
Part No : RS1806




<u>Termination Procedure</u>
PlugPage 27
Receptacle Page 28

AUSPROOF

660V 300A


3 Phase 1 Pilot

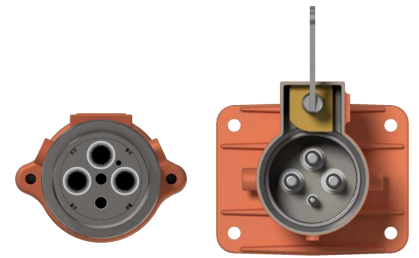

Pilot Orientation

Pre-Built To Suit Cable Type

TYPE: P634
(Not for Purchasing Use)

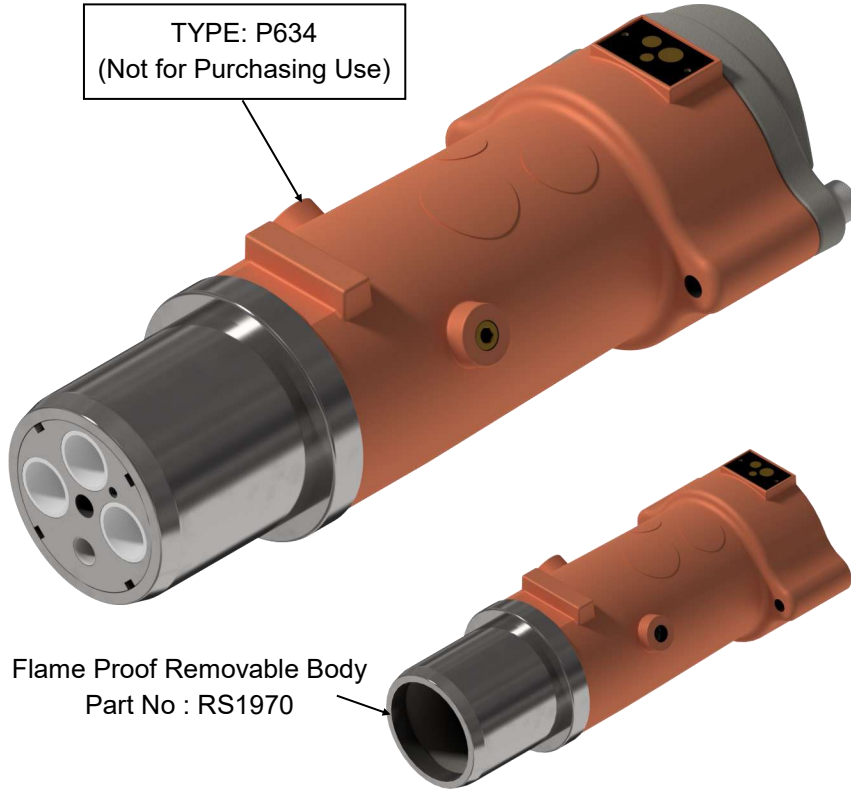


Flame Proof Removable Body
Part No : RS1970

Plug Type To Suit Cable Type				
(mm ²)	*Ref.	241.1	*Ref.	275.1
16	(F)	RS1412	(E)	RS2129
25	(F)	RS1413	(E)	RS2130
35	(G)	RS1414	(F)	RS2131
50	(H)	RS1415	(G)	RS2132
70	(I)	RS1416	-	-
95	(J)	RS1417	-	-
120	(K)	RS1418	-	-
150	(L)	RS1419	-	-
185	(M)	RS1420	-	-

*Gland Reference Letter

Part Breakdown For Customized Cables; One Of Each Type Required

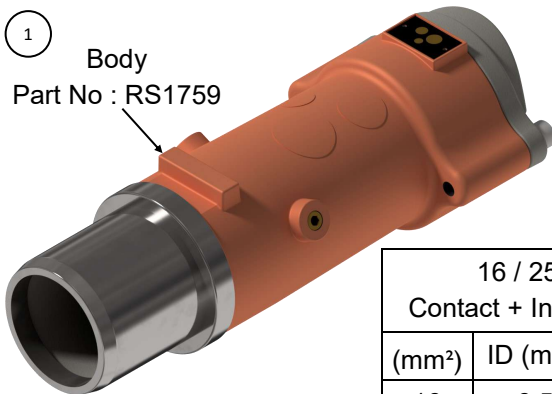


1 Body
Part No : RS1759



2 Front Cage
Part No : RS1914



16 / 25 Style Contact + Insulator Sets		
(mm ²)	ID (mm)	Part No.
16	6.5	RS1933
25	7.5	RS1934
35	9.0	RS1935
50	10.5	RS1936
70	12.5	RS1937
95	14.0	RS1938
120	16.0	RS1939
150	17.7	RS1940
185	19.5	RS1941




4

Compression Gland Type		
*Ref.	Gland ID	Part No.
(A)	10-15	RS2175
(B)	15-20	RS2176
(C)	20-25	RS2177
(D)	25-30	RS2178
(E)	30-35	RS1618
(F)	35-40	RS1619
(G)	40-45	RS1620
(H)	45-50	RS1621
(I)	50-55	RS1622
(J)	55-60	RS1623
(K)	60-65	RS1624
(L)	65-70	RS1625
(M)	70-75	RS1626

*Gland Reference Letter

TYPE: QRR634
(Not for Purchasing Use)


Body
Part No : RS1904QR

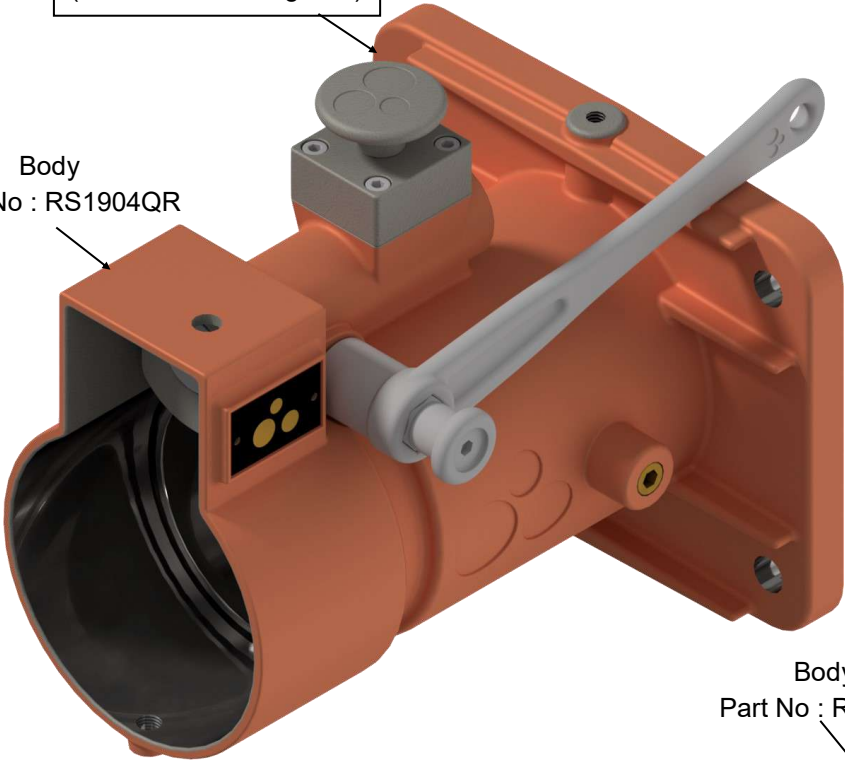


Receptacle Type to Suit mm² Cable Tails		
(mm²)	(Jack In) Part No.	(Quick Release) Part No.
16	RS1421	RS1421QR
25	RS1422	RS1422QR
35	RS1423	RS1423QR
50	RS1424	RS1424QR
70	RS1425	RS1425QR
95	RS1426	RS1426QR
120	RS1427	RS1426QR
150	RS1428	RS1428QR
185	RS1429	RS1429QR

TYPE: R634
(Not for Purchasing Use)

Body
Part No : RS1904

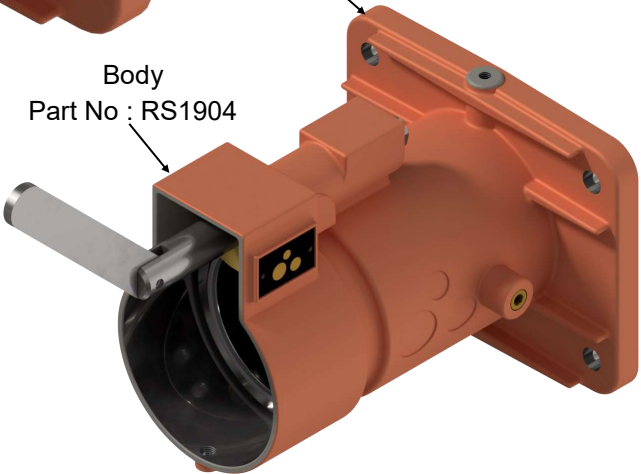

16 / 78 Style Contact + Insulator Sets		
(mm²)	ID (mm)	Part No.
16	6.5	RS1998
25	7.5	RS1999
35	9.0	RS2081
50	10.5	RS2082
70	12.5	RS2083
95	14.0	RS2084
120	16.0	RS2085
150	17.7	RS2086
185	19.5	RS2087

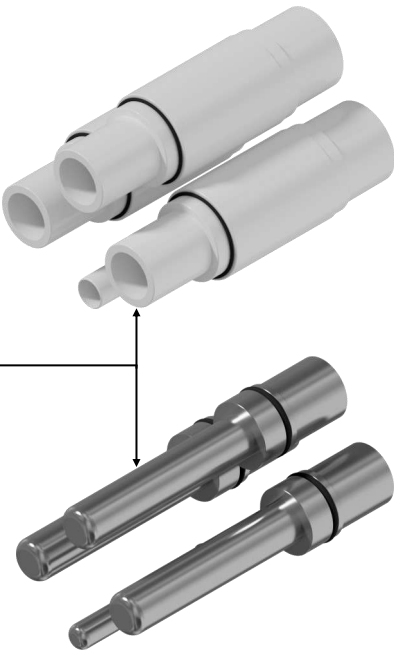

Cage Assembly
Part No : RS1916




Termination Procedure
PlugPage 29
Receptacle Page 30

AUSPROOF

660V 425A


3 Phase 1 Pilot

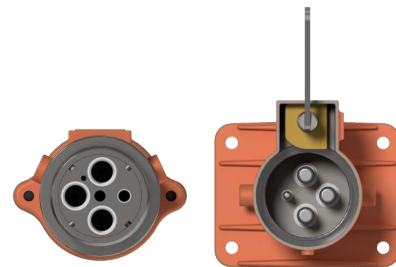

Pilot Orientation

Pre-Built To Suit Cable Type


TYPE: P644
(Not for Purchasing Use)

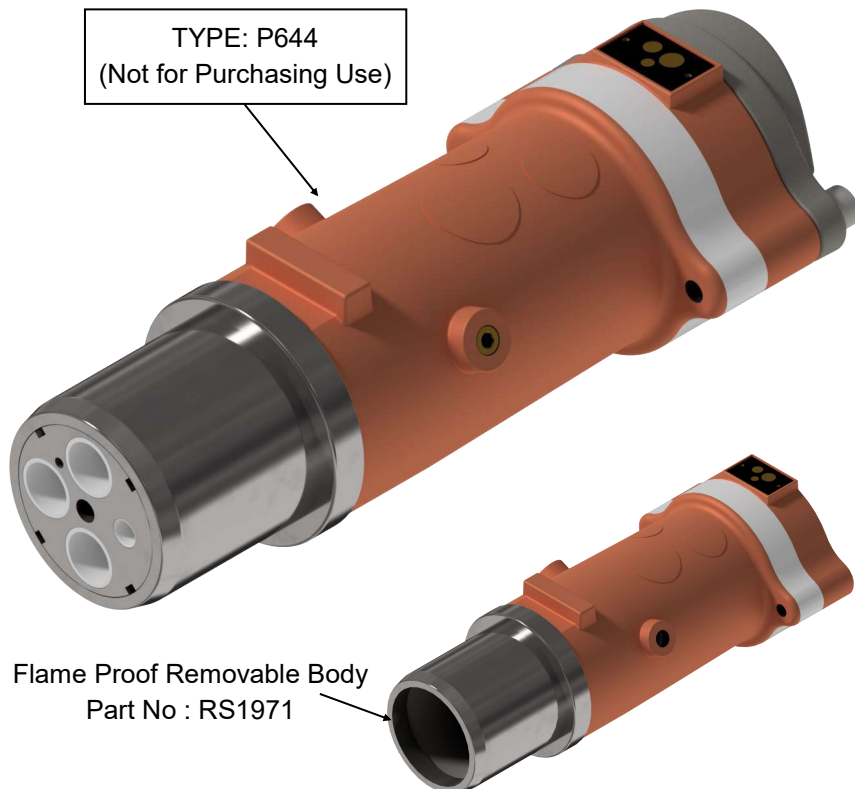


Plug Type To Suit Cable Type				
(mm ²)	*Ref.	241.1	*Ref.	275.1
16	(F)	RS1430	(E)	RS2133
25	(F)	RS1431	(E)	RS2134
35	(G)	RS1432	(F)	RS2135
50	(H)	RS1433	(G)	RS2136
70	(I)	RS1434	-	-
95	(J)	RS1435	-	-
120	(K)	RS1436	-	-
150	(L)	RS1437	-	-
185	(M)	RS1438	-	-

*Gland Reference Letter

Part Breakdown For Customized Cables; One Of Each Type Required

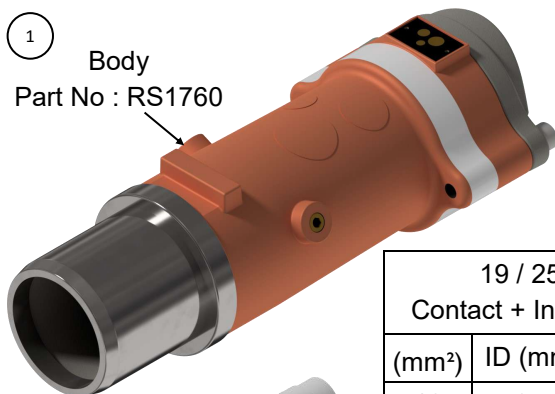

19 / 25 Style Contact + Insulator Sets		
(mm ²)	ID (mm)	Part No.
16	6.5	RS1932
25	7.5	RS1931
35	9.0	RS1930
50	10.5	RS1929
70	12.5	RS1928
95	14.0	RS1927
120	16.0	RS1926
150	17.7	RS1925
185	19.5	RS1924




Compression Gland Type		
*Ref.	Gland ID	Part No.
(A)	10-15	RS2175
(B)	15-20	RS2176
(C)	20-25	RS2177
(D)	25-30	RS2178
(E)	30-35	RS1618
(F)	35-40	RS1619
(G)	40-45	RS1620
(H)	45-50	RS1621
(I)	50-55	RS1622
(J)	55-60	RS1623
(K)	60-65	RS1624
(L)	65-70	RS1625
(M)	70-75	RS1626

*Gland Reference Letter

TYPE: QRR644
(Not for Purchasing Use)


Body
Part No : RS1905QR

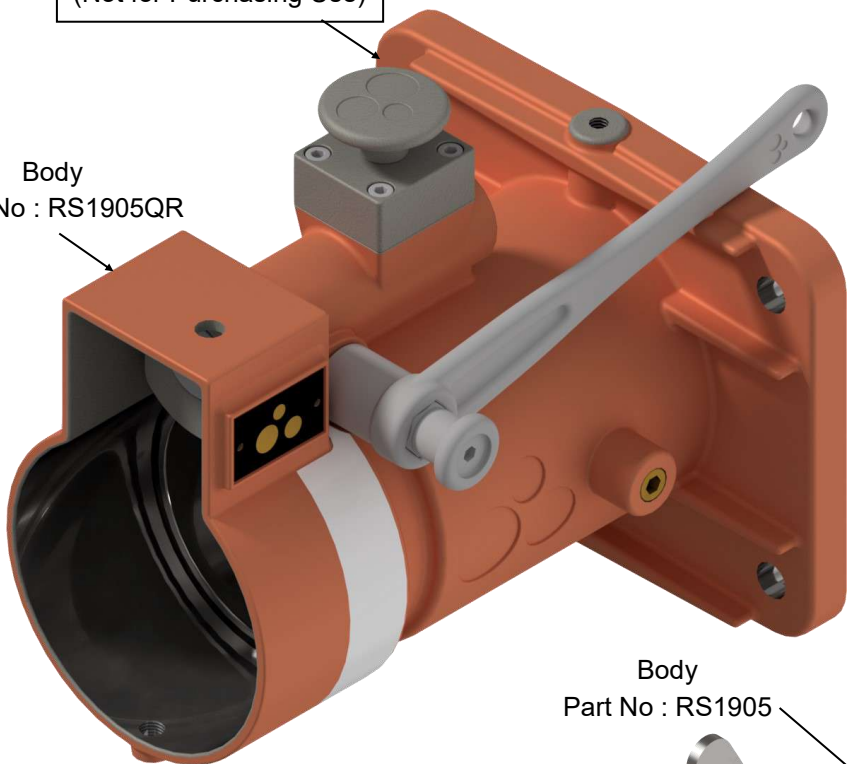


Receptacle Type to Suit mm² Cable Tails		
(mm²)	(Jack In) Part No.	(Quick Release) Part No.
16	RS1439	RS1439QR
25	RS1440	RS1440QR
35	RS1441	RS1441QR
50	RS1442	RS1442QR
70	RS1443	RS1443QR
95	RS1444	RS1444QR
120	RS1445	RS1445QR
150	RS1446	RS1446QR
185	RS1447	RS1447QR

TYPE: R644
(Not for Purchasing Use)

Body
Part No : RS1905

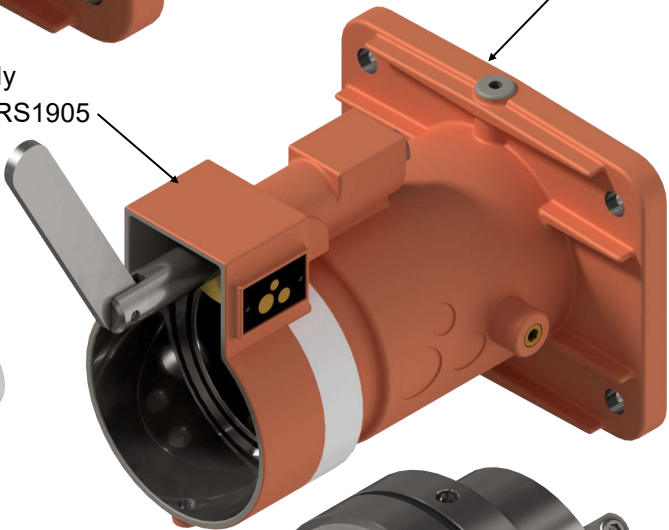

19 / 78 Style Contact + Insulator Sets		
(mm²)	ID (mm)	Part No.
16	6.5	RS1989
25	7.5	RS1990
35	9.0	RS1991
50	10.5	RS1992
70	12.5	RS1993
95	14.0	RS1994
120	16.0	RS1995
150	17.7	RS1996
185	19.5	RS1997

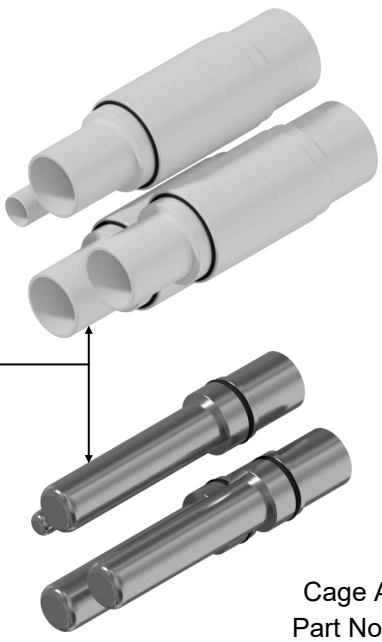

Cage Assembly
Part No : RS1916



Termination Procedure
PlugPage 29
Receptacle Page 30

AUSPROOF

1100V 150A


3 Phase 1 Pilot



Pilot Orientation

Pre-Built To Suit Cable Type

TYPE: P114
(Not for Purchasing Use)

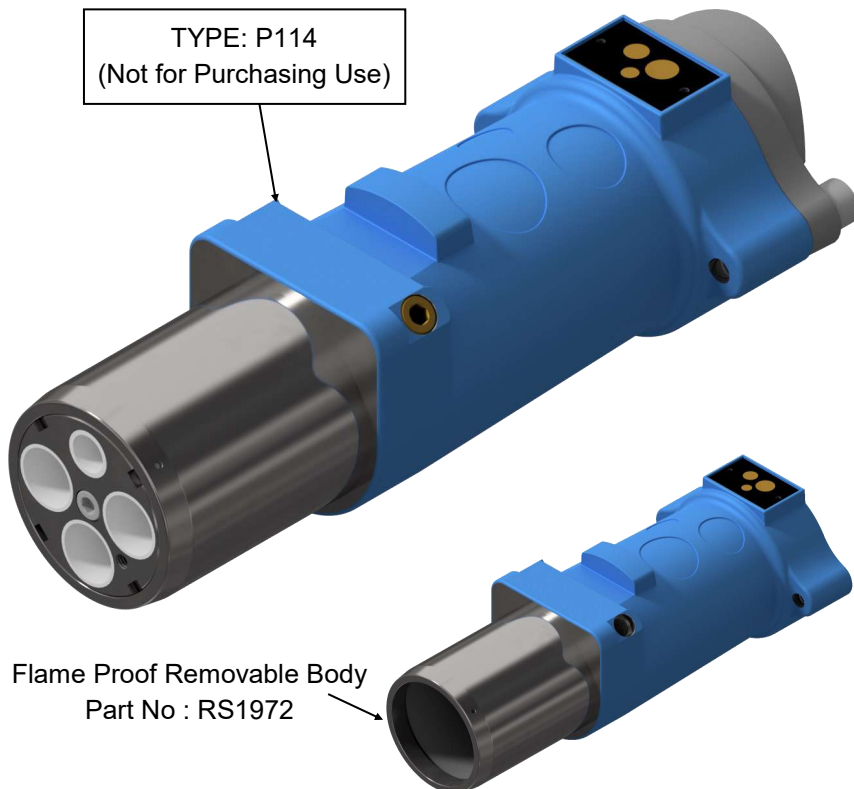


Plug Type To Suit Cable Type		
(mm ²)	*Ref.	241.1
25	(E)	RS1402
35	(F)	RS1403
50	(G)	RS1404
70	(H)	RS1405
95	(I)	RS1406


*Gland Reference Letter

Flame Proof Removable Body
Part No : RS1972

Part Breakdown For Customized Cables; One Of Each Type Required

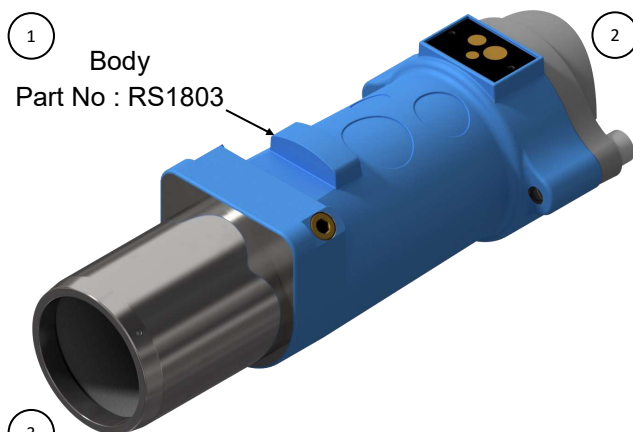

12 / 20 Style Contact Sets		
(mm ²)	ID (mm)	Part No.
25	7.5	RS1597
35	9.0	RS1598
50	10.5	RS1599
70	12.5	RS1600
95	14.0	RS1601

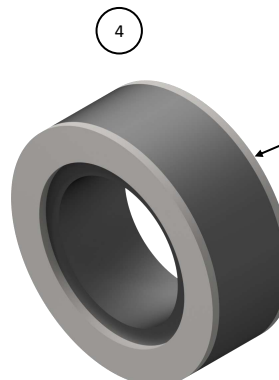


Compression Gland Type		
*Ref.	Gland ID	Part No.
(A)	10-15	RS2179
(B)	15-20	RS2180
(C)	20-25	RS2181
(D)	25-30	RS2182
(E)	35-40	RS1592
(F)	40-45	RS1593
(G)	45-50	RS1594
(H)	50-55	RS1595
(I)	55-60	RS1596

*Gland Reference Letter

TYPE: QRR114
(Not for Purchasing Use)


Body
Part No : RS1805QR

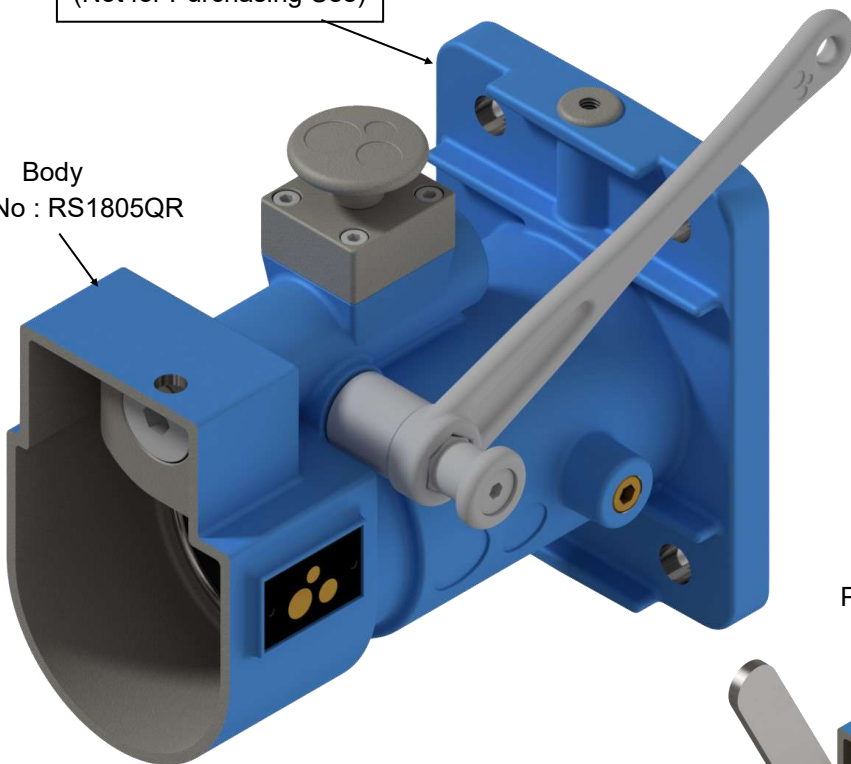

Receptacle Type to Suit mm ² Cable Tails		
(mm ²)	(Jack In) Part No.	(Quick Release) Part No.
25	RS1407	RS1407QR
35	RS1408	RS1408QR
50	RS1409	RS1409QR
70	RS1410	RS1410QR
95	RS1411	RS1411QR

TYPE: R114
(Not for Purchasing Use)

Body
Part No : RS1805

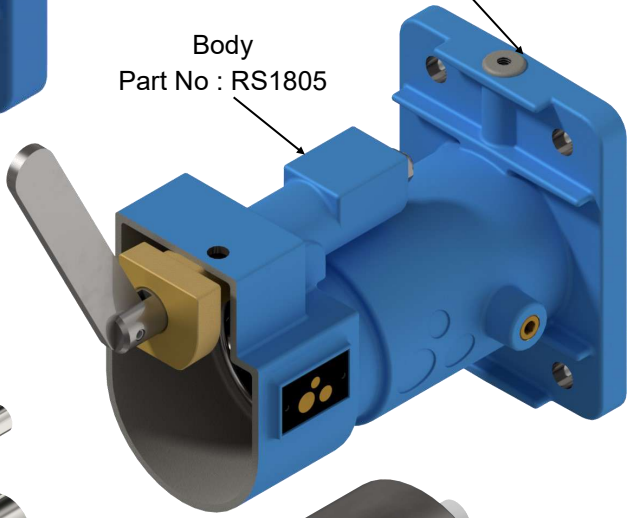

12 / 68 Style Contact Sets		
(mm ²)	ID (mm)	Part No.
25	7.5	RS1612
35	9.0	RS1613
50	10.5	RS1614
70	12.5	RS1615
95	14.0	RS1616



Cage Assembly
Part No : RS1806




<u>Termination Procedure</u>	
Plug	Page 27
Receptacle	Page 28

AUSPROOF

1100V 300A


3 Phase 1 Pilot

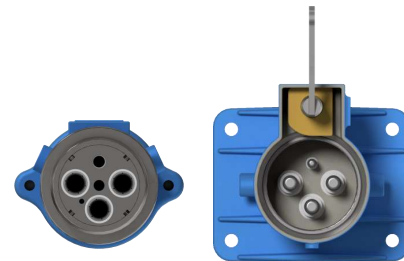

Pilot Orientation

Pre-Built To Suit Cable Type

TYPE: P134
(Not for Purchasing Use)

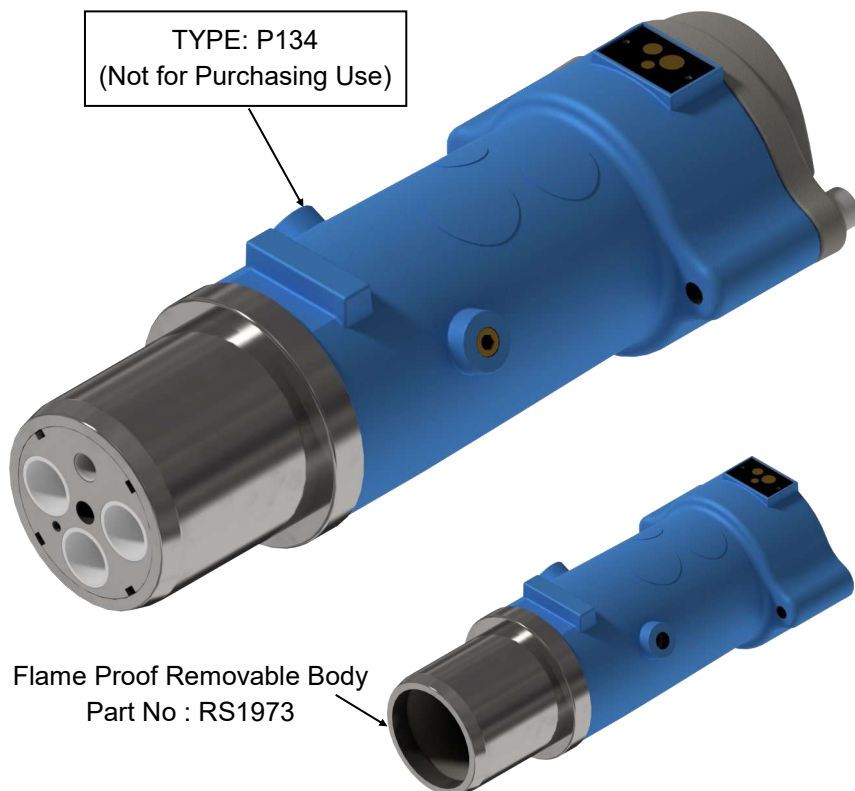

Flame Proof Removable Body
Part No : RS1973

Plug Type To Suit Cable Type				
(mm ²)	*Ref.	241.1	*Ref.	275.1
16	(F)	RS1448	(E)	RS2137
25	(F)	RS1449	(E)	RS2138
35	(G)	RS1450	(F)	RS2139
50	(H)	RS1451	(G)	RS2140
70	(I)	RS1452	-	-
95	(J)	RS1453	-	-
120	(K)	RS1454	-	-
150	(L)	RS1455	-	-
185	(M)	RS1456	-	-

*Gland Reference Letter


Part Breakdown For Customized Cables; One Of Each Type Required




1 Body
Part No : RS1761



2 Front Cage
Part No : RS1914

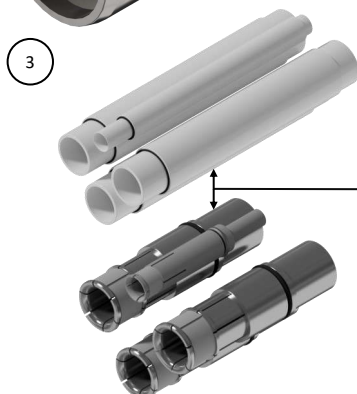

16 / 25 Style Contact + Insulator Sets		
(mm ²)	ID (mm)	Part No.
16	6.5	RS1933
25	7.5	RS1934
35	9.0	RS1935
50	10.5	RS1936
70	12.5	RS1937
95	14.0	RS1938
120	16.0	RS1939
150	17.7	RS1940
185	19.5	RS1941

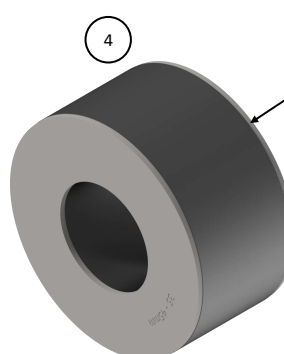


4

Compression Gland Type		
*Ref.	Gland ID	Part No.
(A)	10-15	RS2175
(B)	15-20	RS2176
(C)	20-25	RS2177
(D)	25-30	RS2178
(E)	30-35	RS1618
(F)	35-40	RS1619
(G)	40-45	RS1620
(H)	45-50	RS1621
(I)	50-55	RS1622
(J)	55-60	RS1623
(K)	60-65	RS1624
(L)	65-70	RS1625
(M)	70-75	RS1626

*Gland Reference Letter

TYPE: QRR134
(Not for Purchasing Use)


Body
Part No : RS1906QR

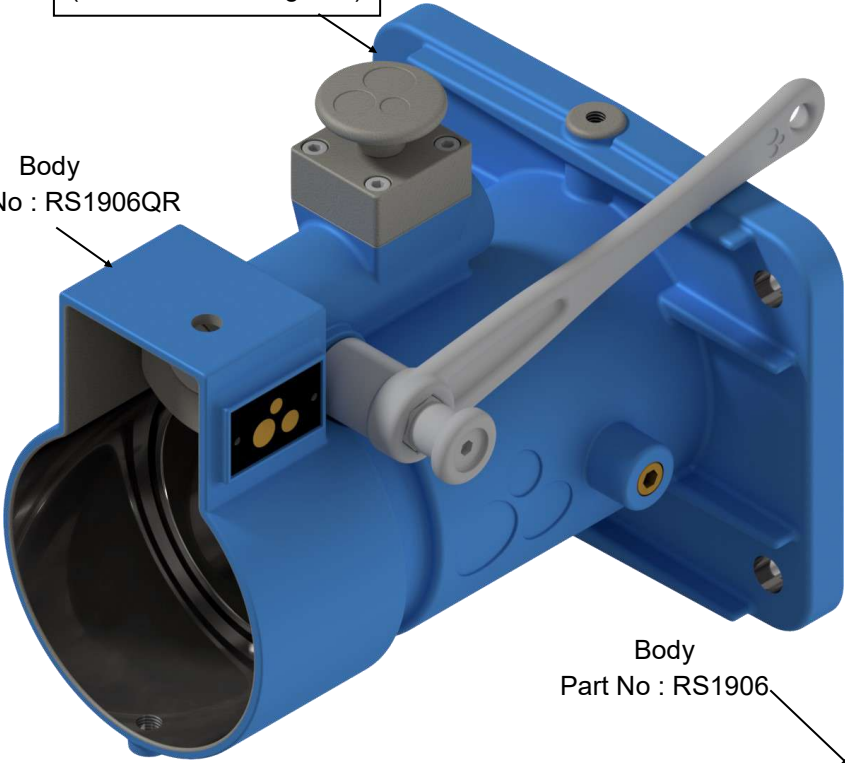


Receptacle Type to Suit mm ² Cable Tails		
(mm ²)	(Jack In) Part No.	(Quick Release) Part No.
16	RS1457	RS1457QR
25	RS1458	RS1458QR
35	RS1459	RS1459QR
50	RS1460	RS1460QR
70	RS1461	RS1461QR
95	RS1462	RS1462QR
120	RS1463	RS1463QR
150	RS1464	RS1464QR
185	RS1465	RS1465QR

TYPE: R134
(Not for Purchasing Use)

Body
Part No : RS1906

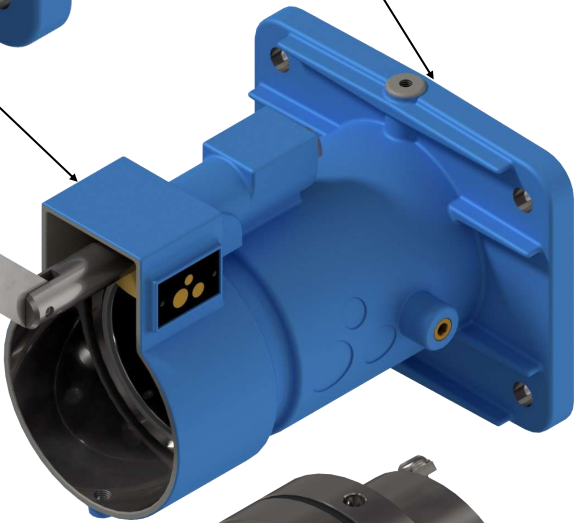

16 / 78 Style Contact + Insulator Sets		
(mm ²)	ID (mm)	Part No.
16	6.5	RS1998
25	7.5	RS1999
35	9.0	RS2081
50	10.5	RS2082
70	12.5	RS2083
95	14.0	RS2084
120	16.0	RS2085
150	17.7	RS2086
185	19.5	RS2087

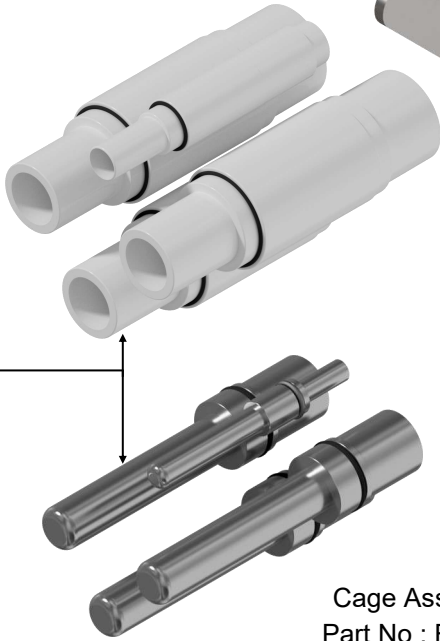

Cage Assembly
Part No : RS1916




Termination Procedure
PlugPage 29
Receptacle Page 30

AUSPROOF

1100V 425A


3 Phase 1 Pilot

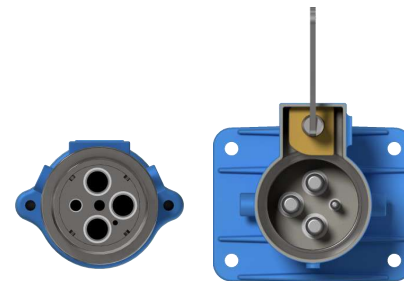

Pilot Orientation

Pre-Built To Suit Cable Type


TYPE: P144
(Not for Purchasing Use)

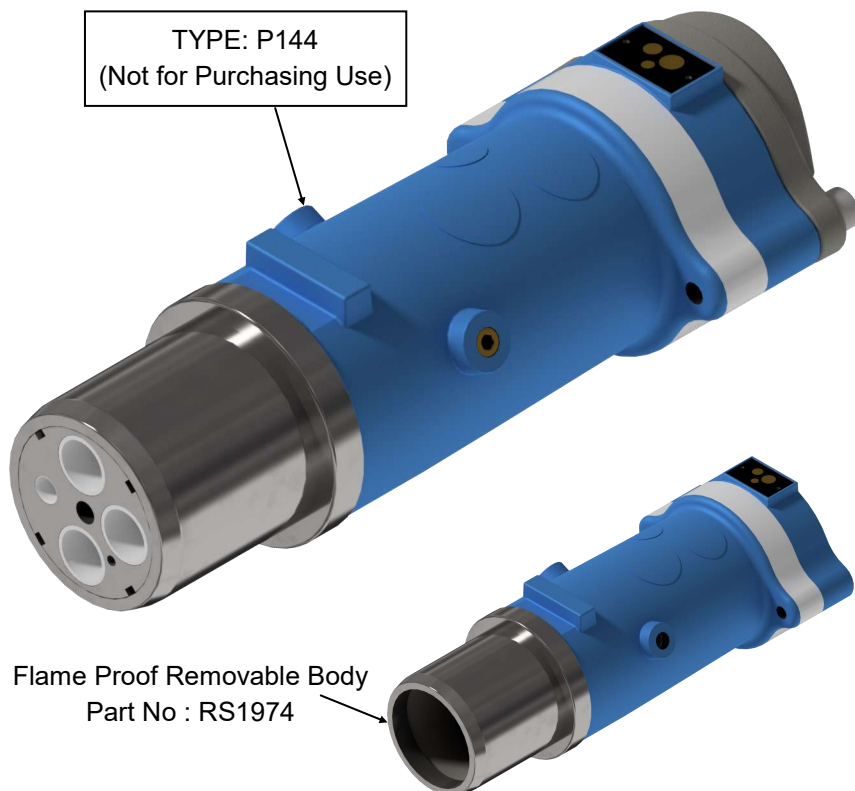


Plug Type To Suit 241.1 Cable				
(mm ²)	*Ref.	241.1	*Ref.	275.1
16	(F)	RS1484	(E)	RS2141
25	(F)	RS1485	(E)	RS2142
35	(G)	RS1486	(F)	RS2143
50	(H)	RS1487	(G)	RS2144
70	(I)	RS1488	-	-
95	(J)	RS1489	-	-
120	(K)	RS1490	-	-
150	(L)	RS1491	-	-
185	(M)	RS1492	-	-

*Gland Reference Letter

Part Breakdown For Customized Cables; One Of Each Type Required

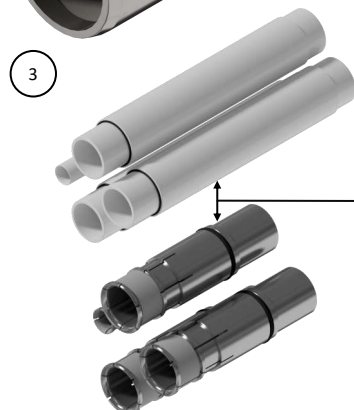

19 / 25 Style Contact + Insulator Sets		
(mm ²)	ID (mm)	Part No.
16	6.5	RS1932
25	7.5	RS1931
35	9.0	RS1930
50	10.5	RS1929
70	12.5	RS1928
95	14.0	RS1927
120	16.0	RS1926
150	17.7	RS1925
185	19.5	RS1924




Compression Gland Type		
*Ref.	Gland ID	Part No.
(A)	10-15	RS2175
(B)	15-20	RS2176
(C)	20-25	RS2177
(D)	25-30	RS2178
(E)	30-35	RS1618
(F)	35-40	RS1619
(G)	40-45	RS1620
(H)	45-50	RS1621
(I)	50-55	RS1622
(J)	55-60	RS1623
(K)	60-65	RS1624
(L)	65-70	RS1625
(M)	70-75	RS1626

*Gland Reference Letter

TYPE: QRR144
(Not for Purchasing Use)


Body
Part No : RS1907QR

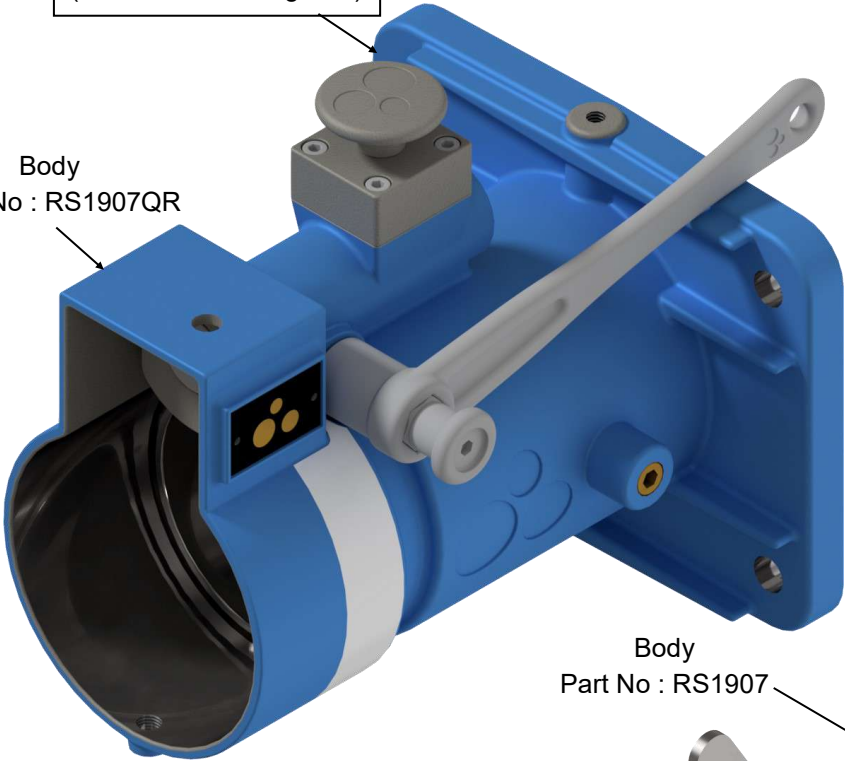


Receptacle Type to Suit mm² Cable Tails		
(mm²)	(Jack In) Part No.	(Quick Release) Part No.
16	RS1493	RS1493QR
25	RS1494	RS1494QR
35	RS1495	RS1495QR
50	RS1496	RS1496QR
70	RS1497	RS1497QR
95	RS1498	RS1498QR
120	RS1499	RS1499QR
150	RS1500	RS1500QR
185	RS1501	RS1501QR

TYPE: R144
(Not for Purchasing Use)

Body
Part No : RS1907

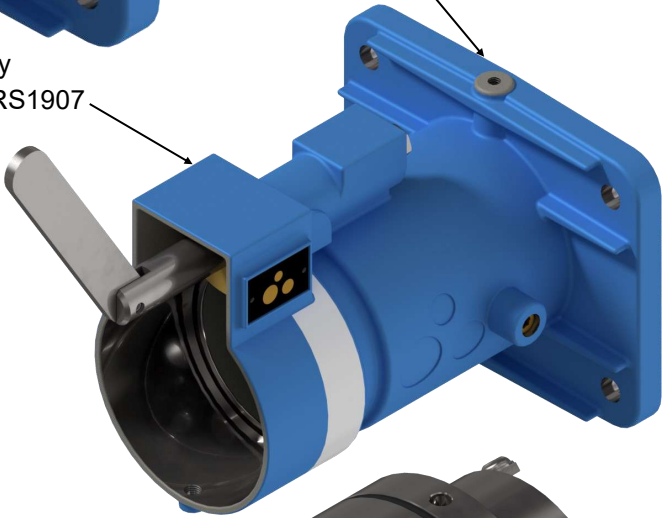

19 / 78 Style Contact + Insulator Sets		
(mm²)	ID (mm)	Part No.
16	6.5	RS1989
25	7.5	RS1990
35	9.0	RS1991
50	10.5	RS1992
70	12.5	RS1993
95	14.0	RS1994
120	16.0	RS1995
150	17.7	RS1996
185	19.5	RS1997

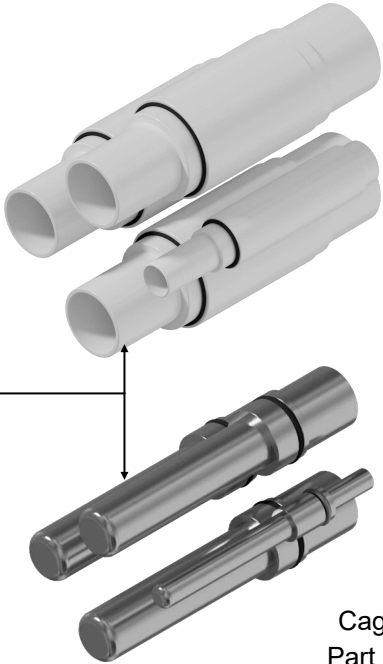

Cage Assembly
Part No : RS1916




Termination Procedure
PlugPage 29
Receptacle Page 30

AUSPROOF

1100V 300A


3 Phase 3 Pilot

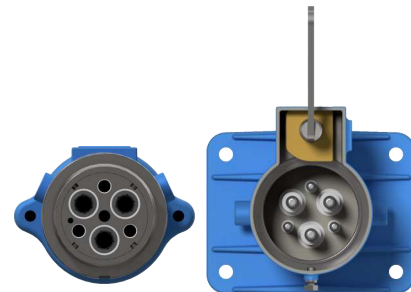

Pilot Orientation

Pre-Built To Suit Cable Type



TYPE: P136
(Not for Purchasing Use)

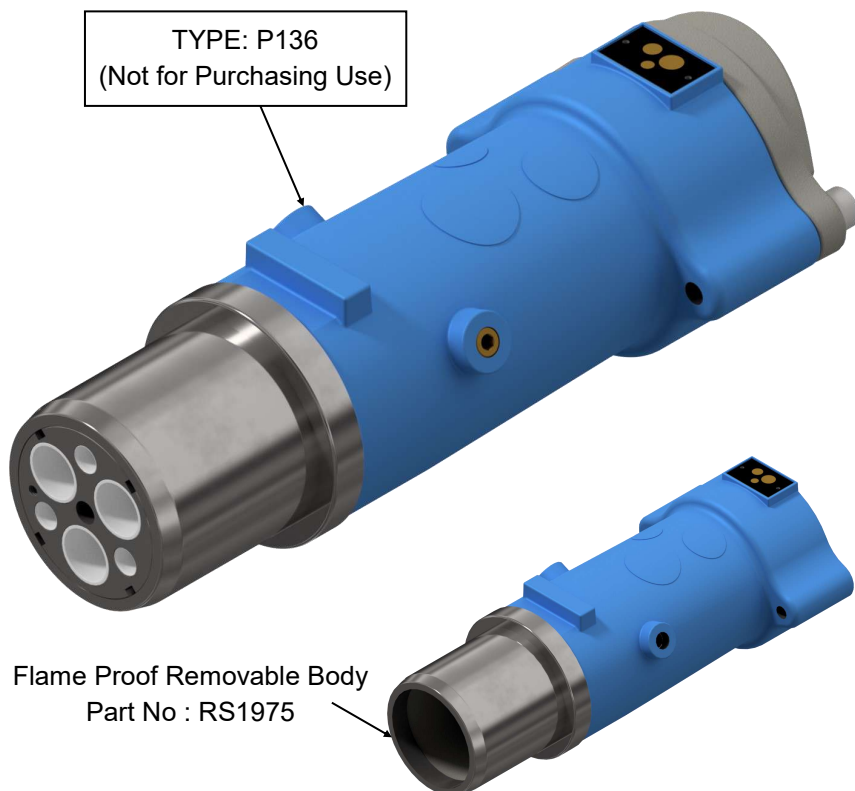


Plug Type To Suit 241.1 Cable				
(mm ²)	*Ref.	241.1	*Ref.	245.1
16	(F)	RS1466	-	-
25	(F)	RS1467	-	-
35	(G)	RS1468	-	-
50	(H)	RS1469	(H)	RS2145
70	(I)	RS1470	(I)	RS2146
95	(J)	RS1471	(J)	RS2147
120	(K)	RS1472	(L)	RS2148
150	(L)	RS1473	(M)	RS2149
185	(M)	RS1474	-	-

*Gland Reference Letter

Part Breakdown For Customized Cables; One Of Each Type Required

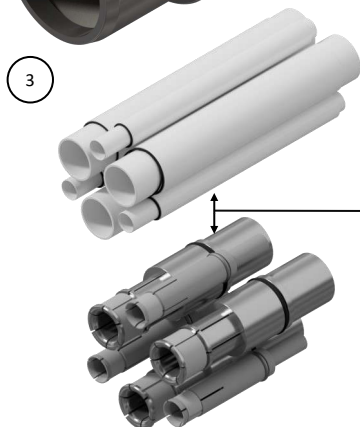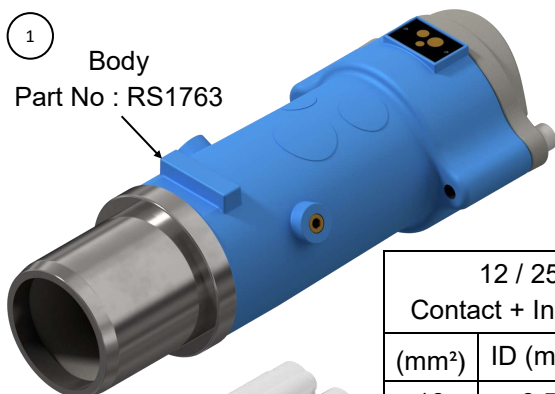

12 / 25 Style Contact + Insulator Sets		
(mm ²)	ID (mm)	Part No.
16	6.5	RS1942
25	7.5	RS1943
35	9.0	RS1944
50	10.5	RS1945
70	12.5	RS1946
95	14.0	RS1947
120	16.0	RS1948
150	17.7	RS1949
185	19.5	RS1950

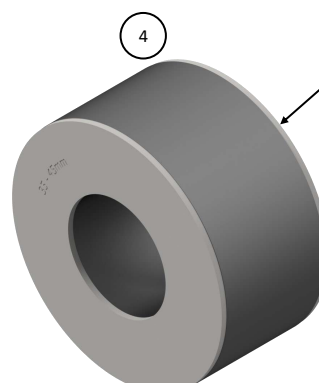


Compression Gland Type		
*Ref.	Gland ID	Part No.
(A)	10-15	RS2175
(B)	15-20	RS2176
(C)	20-25	RS2177
(D)	25-30	RS2178
(E)	30-35	RS1618
(F)	35-40	RS1619
(G)	40-45	RS1620
(H)	45-50	RS1621
(I)	50-55	RS1622
(J)	55-60	RS1623
(K)	60-65	RS1624
(L)	65-70	RS1625
(M)	70-75	RS1626

*Gland Reference Letter

TYPE: QRR136
(Not for Purchasing Use)


Body
Part No : RS1908QR

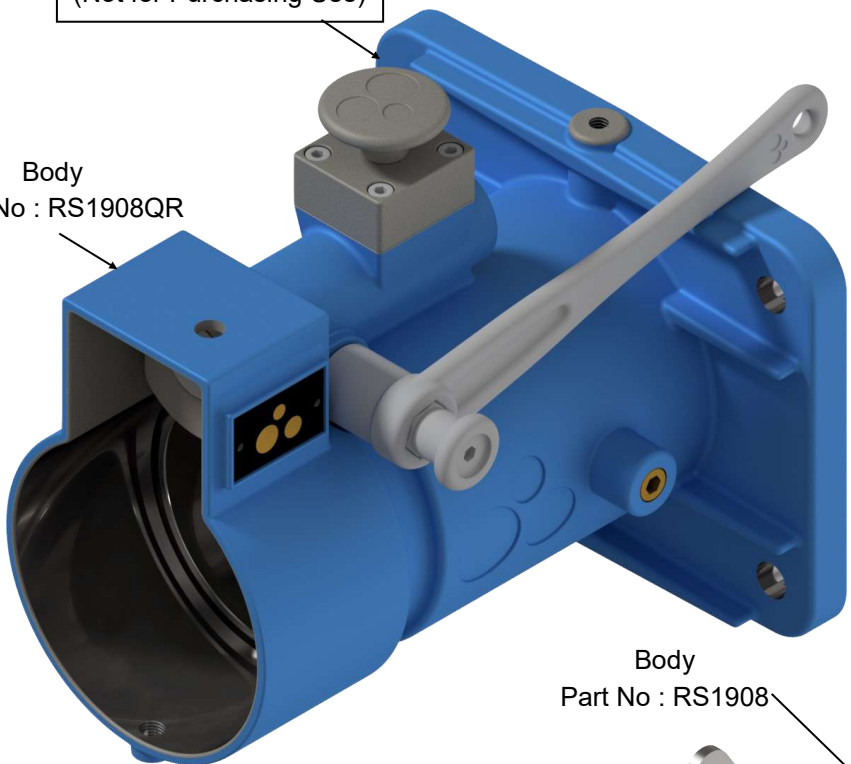


Receptacle Type to Suit mm² Cable Tails		
(mm²)	(Jack In) Part No.	(Quick Release) Part No.
16	RS1475	RS1475QR
25	RS1476	RS1476QR
35	RS1477	RS1477QR
50	RS1478	RS1478QR
70	RS1479	RS1479QR
95	RS1480	RS1480QR
120	RS1481	RS1481QR
150	RS1482	RS1482QR
185	RS1483	RS1483QR

TYPE: R136
(Not for Purchasing Use)

Body
Part No : RS1908

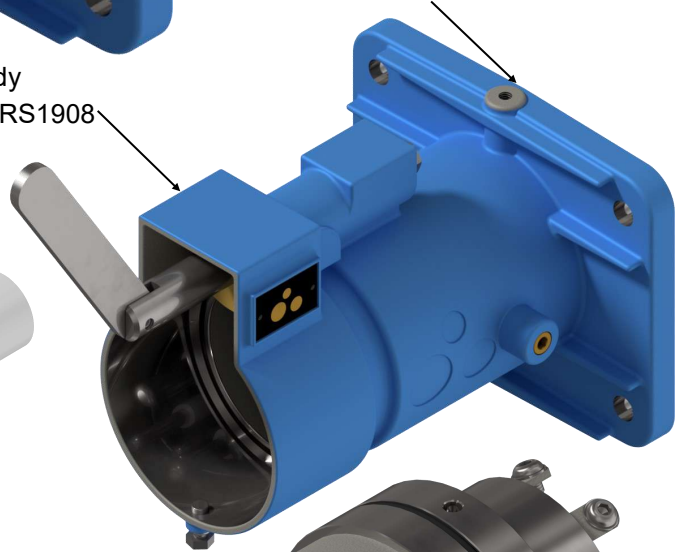

12 / 106 Style Contact + Insulator Sets		
(mm²)	ID (mm)	Part No.
16	6.5	RS2088
25	7.5	RS2089
35	9.0	RS2090
50	10.5	RS2091
70	12.5	RS2092
95	14.0	RS2093
120	16.0	RS2094
150	17.7	RS2095
185	19.5	RS2096

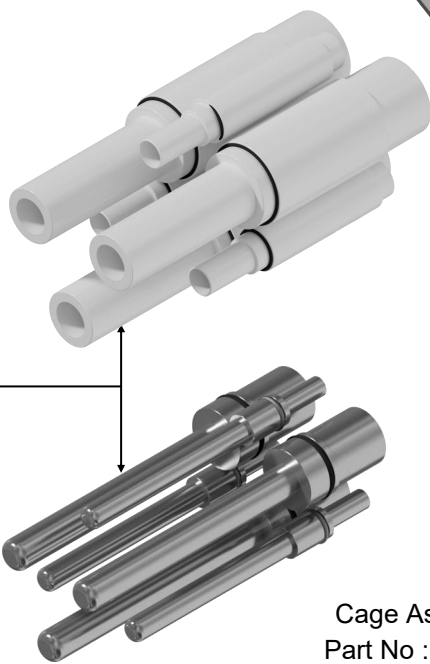


Cage Assembly
Part No : RS1917

<u>Termination Procedure</u>
PlugPage 31
Receptacle Page 32

AUSPROOF

1100V 425A


3 Phase 3 Pilot

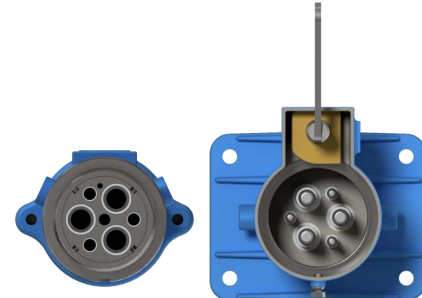

Pilot Orientation

Pre-Built To Suit Cable Type

TYPE: P146
(Not for Purchasing Use)

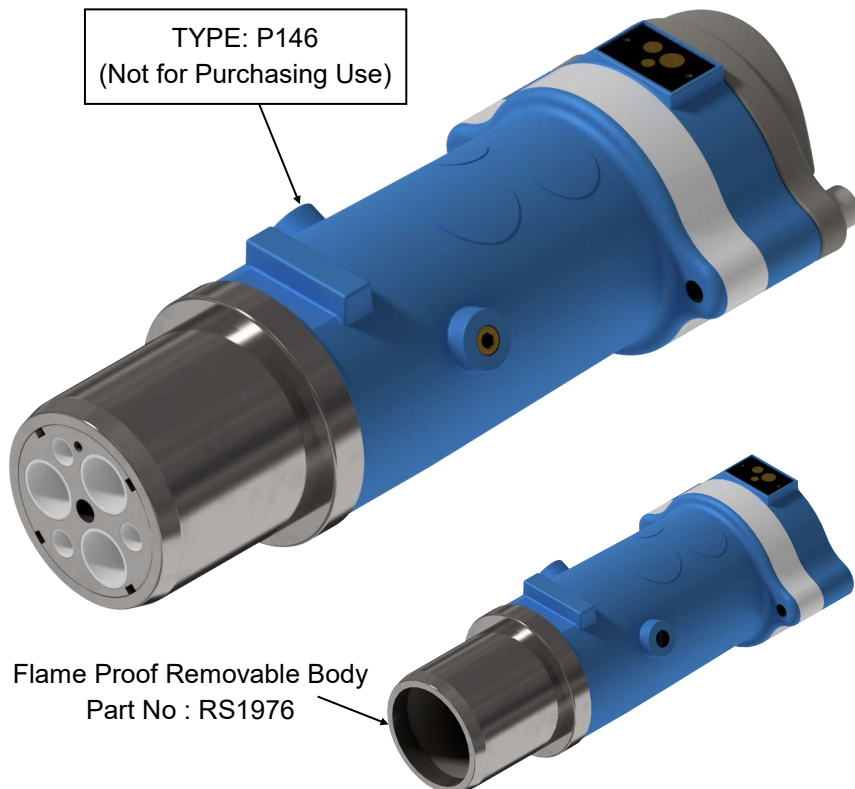

Flame Proof Removable Body
Part No : RS1976

Plug Type To Suit 241.1 Cable				
(mm ²)	*Ref.	241.1	*Ref.	245.1
16	(F)	RS1502	-	-
25	(F)	RS1503	-	-
35	(G)	RS1504	-	-
50	(H)	RS1505	(H)	RS2150
70	(I)	RS1506	(I)	RS2151
95	(J)	RS1507	(J)	RS2152
120	(K)	RS1508	(L)	RS2153
150	(L)	RS1509	(M)	RS2154
185	(M)	RS1510	-	-

*Gland Reference Letter


Part Breakdown For Customized Cables; One Of Each Type Required



1 Body
Part No : RS1764




2 Front Cage
Part No : RS1915

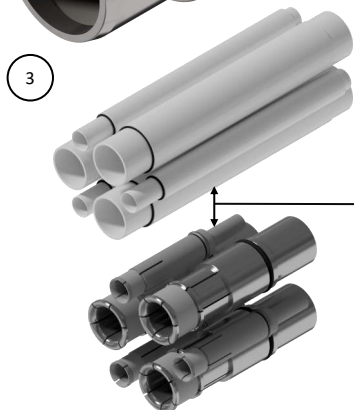

3

16 / 25 Contact + Insulator Sets		
(mm ²)	ID (mm)	Part No.
16	6.5	RS1951
25	7.5	RS1952
35	9.0	RS1953
50	10.5	RS1954
70	12.5	RS1955
95	14.0	RS1956
120	16.0	RS1957
150	17.7	RS1958
185	19.5	RS1959




4

Compression Gland Type		
*Ref.	Gland ID	Part No.
(A)	10-15	RS2175
(B)	15-20	RS2176
(C)	20-25	RS2177
(D)	25-30	RS2178
(E)	30-35	RS1618
(F)	35-40	RS1619
(G)	40-45	RS1620
(H)	45-50	RS1621
(I)	50-55	RS1622
(J)	55-60	RS1623
(K)	60-65	RS1624
(L)	65-70	RS1625
(M)	70-75	RS1626

*Gland Reference Letter

TYPE: QRR146
(Not for Purchasing Use)

Body
Part No : RS1909QR

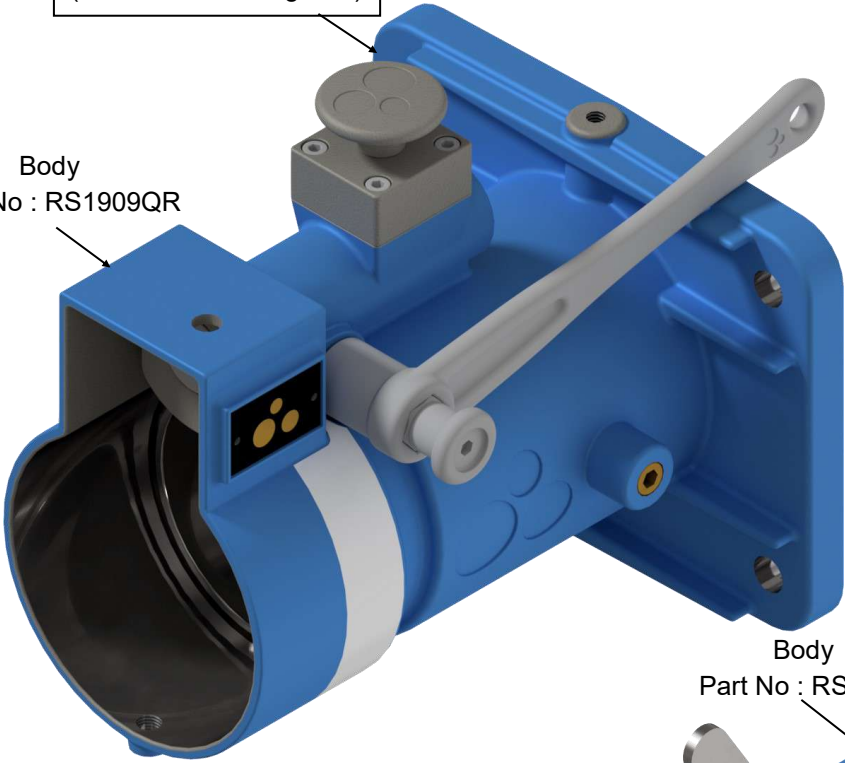


Receptacle Type to Suit mm ² Cable Tails		
(mm ²)	(Jack In) Part No.	(Quick Release) Part No.
16	RS1511	RS1511QR
25	RS1512	RS1512QR
35	RS1513	RS1513QR
50	RS1514	RS1514QR
70	RS1515	RS1515QR
95	RS1516	RS1516QR
120	RS1517	RS1517QR
150	RS1518	RS1518QR
185	RS1519	RS1519QR

TYPE: R146
(Not for Purchasing Use)

Body
Part No : RS1909



16 / 106 Style Contact + Insulator Sets		
(mm ²)	ID (mm)	Part No.
16	6.5	RS2097
25	7.5	RS2098
35	9.0	RS2099
50	10.5	RS2100
70	12.5	RS2101
95	14.0	RS2102
120	16.0	RS2103
150	17.7	RS2104
185	19.5	RS2105

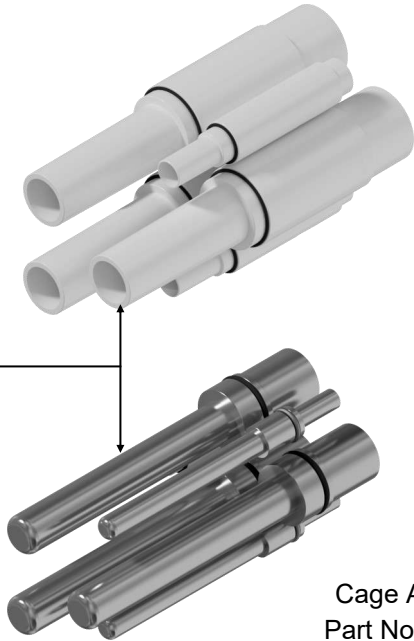

Cage Assembly
Part No : RS1917




Termination Procedure
PlugPage 31
Receptacle Page 32

AUSPROOF

3300V 300A


3 Phase 1 Pilot

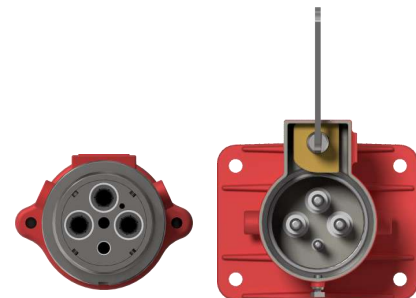

Pilot Orientation

Pre-Built To Suit Cable Type

TYPE: P334
(Not for Purchasing Use)

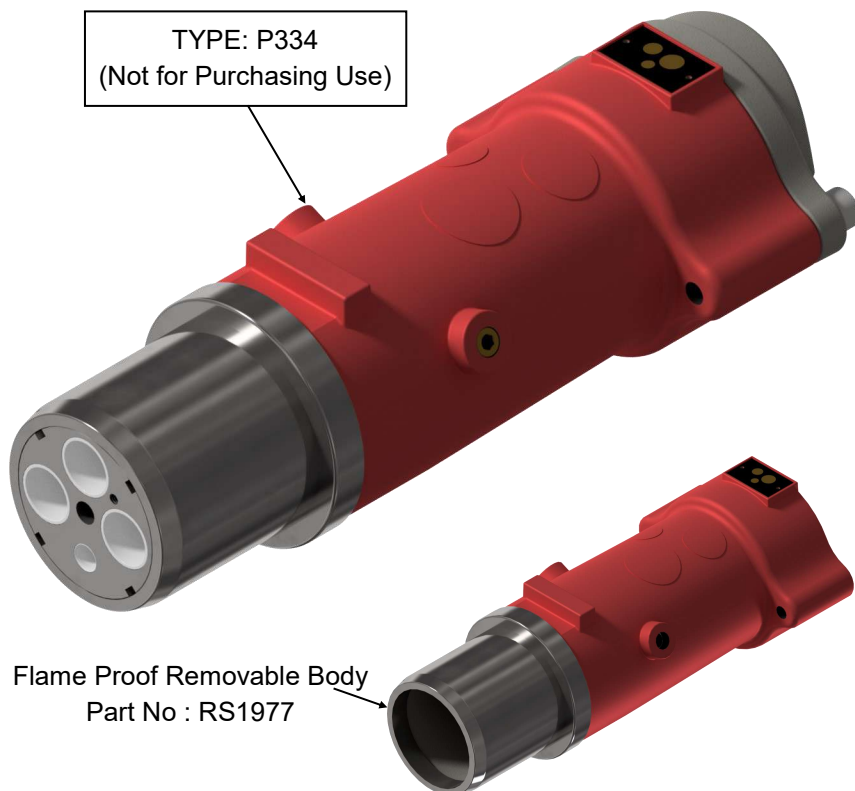

Flame Proof Removable Body
Part No : RS1977

Plug Type To Suit 241.3 Cable				
(mm ²)	*Ref.	241.3	*Ref.	245.3
16	(E)	RS1520	-	-
25	(F)	RS1521	-	-
35	(G)	RS1522	-	-
50	(H)	RS1523	(J)	RS2155
70	(I)	RS1524	(K)	RS2156
95	(J)	RS1525	(L)	RS2157
120	(K)	RS1526	(M)	RS2158
150	(L)	RS1527	(N)	RS2159
185	(M)	RS1528	-	-

*Gland Reference Letter


Part Breakdown For Customized Cables; One Of Each Type Required




1 Body
Part No : RS1765



2 Front Cage
Part No : RS1914

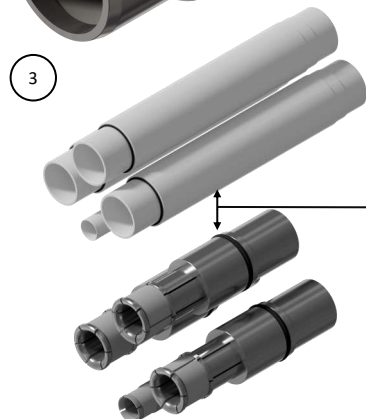

12 / 25 Style Contact + Insulator Sets		
(mm ²)	ID (mm)	Part No.
16	6.5	RS1960
25	7.5	RS1961
35	9.0	RS1962
50	10.5	RS1963
70	12.5	RS1964
95	14.0	RS1965
120	16.0	RS1966
150	17.7	RS1967
185	19.5	RS1968



4

Compression Gland Type		
*Ref.	Gland ID	Part No.
(A)	10-15	RS2175
(B)	15-20	RS2176
(C)	20-25	RS2177
(D)	25-30	RS2178
(G)	40-45	RS1620
(H)	45-50	RS1621
(I)	50-55	RS1622
(J)	55-60	RS1623
(K)	60-65	RS1624
(L)	65-70	RS1625
(M)	70-75	RS1626
(N)	75-80	RS1627

*Gland Reference Letter

TYPE: QRR334
(Not for Purchasing Use)

Body
Part No : RS1910QR

Receptacle Type to Suit mm ² Cable Tails		
(mm ²)	(Jack In) Part No.	(Quick Release) Part No.
16	RS1529	RS1529QR
25	RS1530	RS1530QR
35	RS1531	RS1531QR
50	RS1532	RS1532QR
70	RS1533	RS1533QR
95	RS1534	RS1534QR
120	RS1535	RS1535QR
150	RS1536	RS1536QR
185	RS1537	RS1537QR

TYPE: R334
(Not for Purchasing Use)

Body
Part No : RS1910

12 / 106 Style Contact + Insulator Sets		
(mm ²)	ID (mm)	Part No.
16	6.5	RS2106
25	7.5	RS2107
35	9.0	RS2108
50	10.5	RS2109
70	12.5	RS2110
95	14.0	RS2111
120	16.0	RS2112
150	17.7	RS2113
185	19.5	RS2114


Cage Assembly
Part No : RS1916

<u>Termination Procedure</u>
PlugPage 33
Receptacle Page 34


AUSPROOF

3300V 425A

3 Phase 1 Pilot

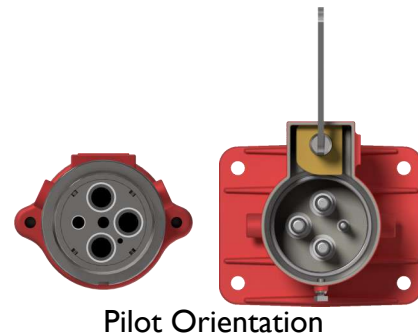

Pre-Built To Suit Cable Type

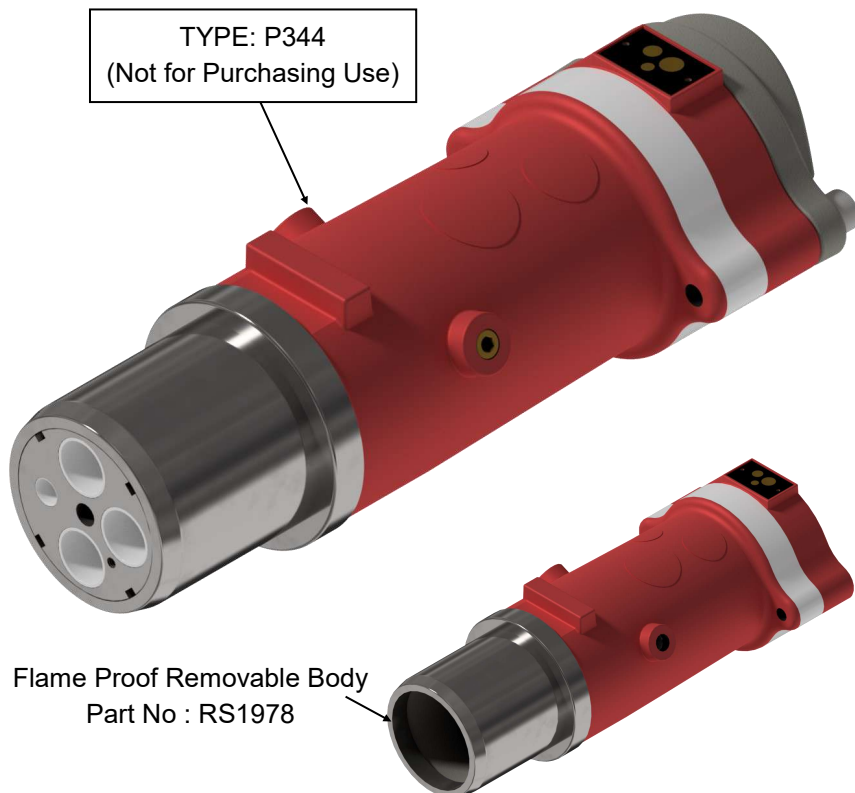


Plug Type To Suit 241.3 Cable				
(mm ²)	*Ref.	241.3	*Ref.	245.3
16	(E)	RS1556	-	-
25	(F)	RS1557	-	-
35	(G)	RS1558	-	-
50	(H)	RS1559	(J)	RS2160
70	(I)	RS1560	(K)	RS2161
95	(J)	RS1561	(L)	RS2162
120	(K)	RS1562	(M)	RS2163
150	(L)	RS1563	(N)	RS2164
185	(M)	RS1564	-	-

*Gland Reference Letter

Part Breakdown For Customized Cables; One Of Each Type Required



16 / 25 Style Contact + Insulator Sets		
(mm ²)	ID (mm)	Part No.
16	6.5	RS1933
25	7.5	RS1934
35	9.0	RS1935
50	10.5	RS1936
70	12.5	RS1937
95	14.0	RS1938
120	16.0	RS1939
150	17.7	RS1940
185	19.5	RS1941




Compression Gland Type		
*Ref.	Gland ID	Part No.
(A)	10-15	RS2175
(B)	15-20	RS2176
(C)	20-25	RS2177
(D)	25-30	RS2178
(G)	40-45	RS1620
(H)	45-50	RS1621
(I)	50-55	RS1622
(J)	55-60	RS1623
(K)	60-65	RS1624
(L)	65-70	RS1625
(M)	70-75	RS1626
(N)	75-80	RS1627

*Gland Reference Letter

TYPE: QRR344
(Not for Purchasing Use)


Body
Part No : RS1911QR

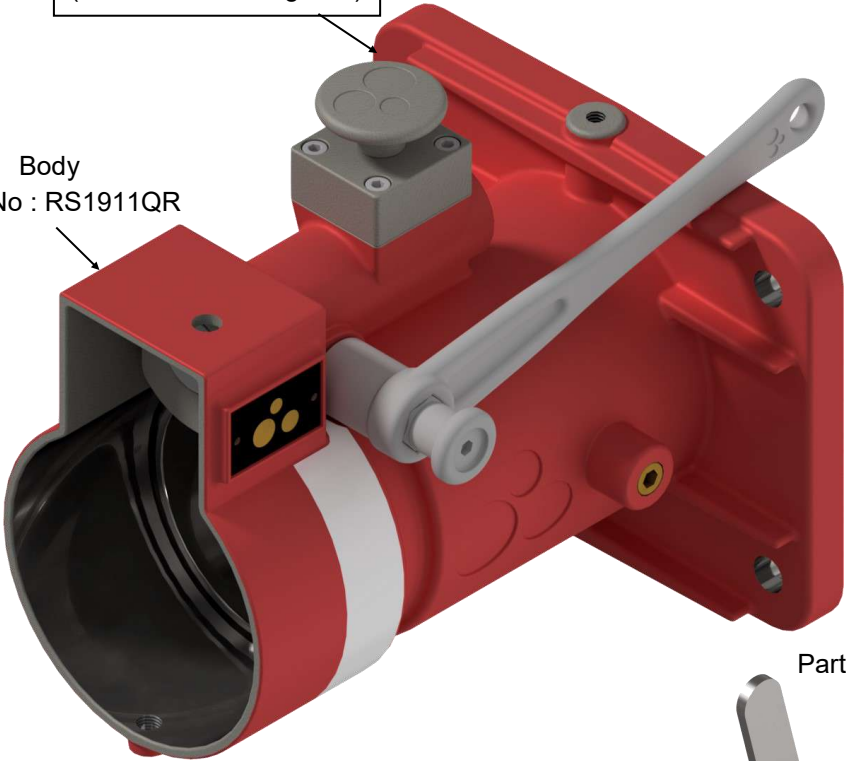


Receptacle Type to Suit mm ² Cable Tails		
(mm ²)	(Jack In) Part No.	(Quick Release) Part No.
16	RS1565	RS1565QR
25	RS1566	RS1566QR
35	RS1567	RS1567QR
50	RS1568	RS1568QR
70	RS1569	RS1569QR
95	RS1570	RS1570QR
120	RS1571	RS1571QR
150	RS1572	RS1572QR
185	RS1573	RS1573QR

TYPE: R344
(Not for Purchasing Use)

Body
Part No : RS1911

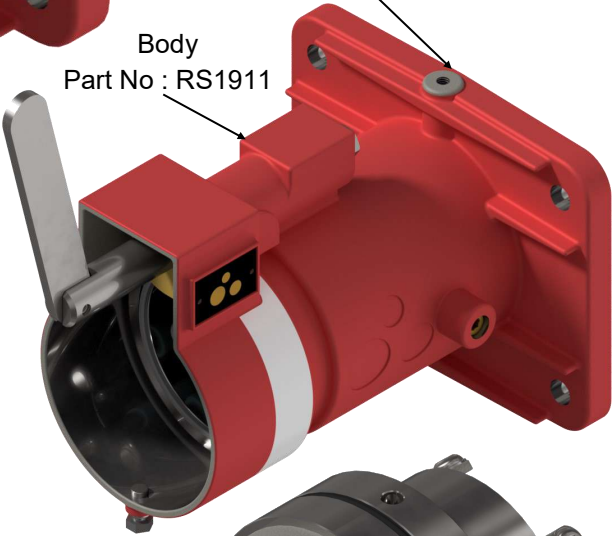

16 / 106 Style Contact + Insulator Sets		
(mm ²)	ID (mm)	Part No.
16	6.5	RS2117
25	7.5	RS2118
35	9.0	RS2119
50	10.5	RS2120
70	12.5	RS2121
95	14.0	RS2122
120	16.0	RS2123
150	17.7	RS2124
185	19.5	RS2125

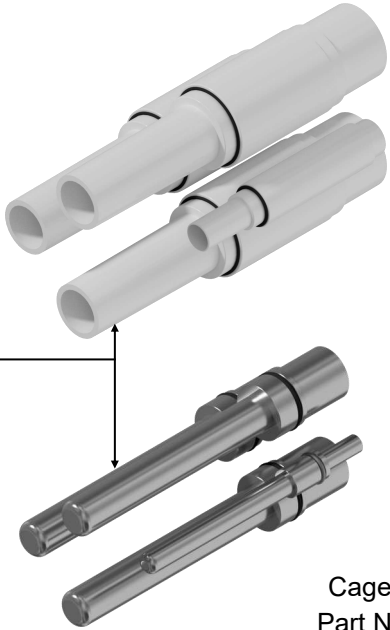

Cage Assembly
Part No : RS1916




Termination Procedure
PlugPage 33
Receptacle Page 34


AUSPROOF

3300V 300A

3 Phase 3 Pilot

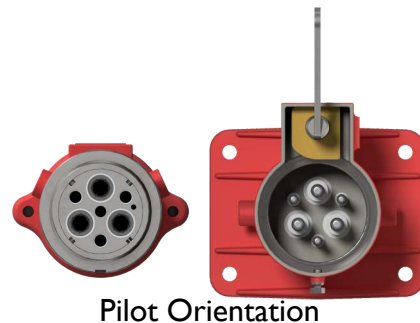



Pre-Built To Suit Cable Type

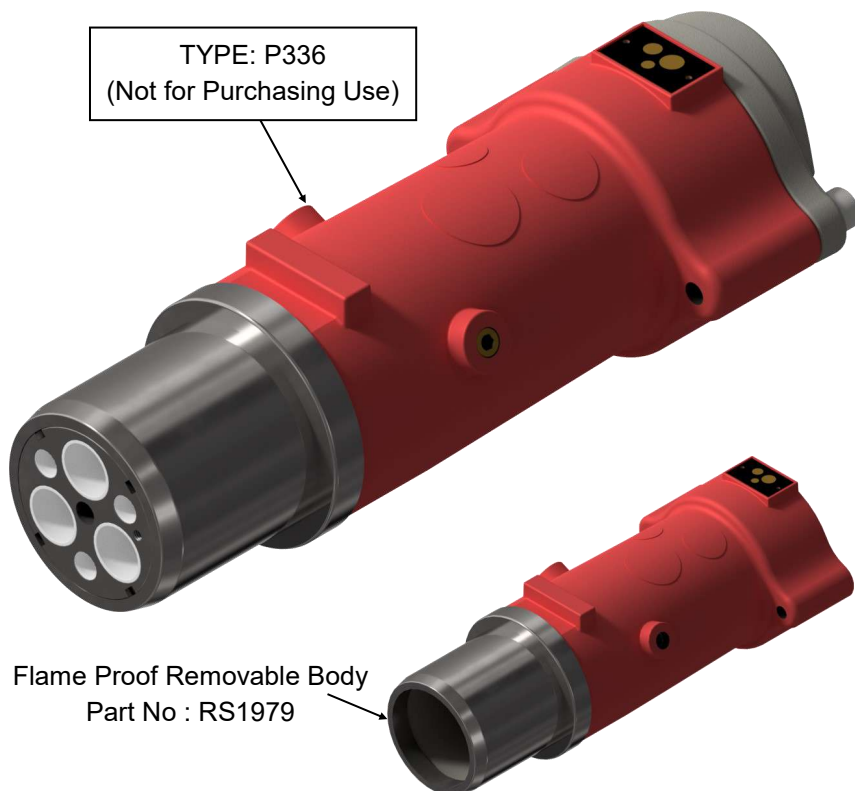


Plug Type To Suit 241.3 Cable				
(mm ²)	*Ref.	241.3	*Ref.	245.3
16	(E)	RS1538	-	-
25	(F)	RS1539	-	-
35	(G)	RS1540	-	-
50	(H)	RS1541	(J)	RS2165
70	(I)	RS1542	(K)	RS2166
95	(J)	RS1543	(L)	RS2167
120	(K)	RS1544	(M)	RS2168
150	(L)	RS1545	(N)	RS2169
185	(M)	RS1546	-	-

*Gland Reference Letter

Part Breakdown For Customized Cables; One Of Each Type Required

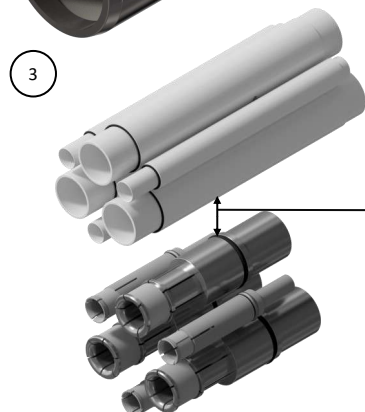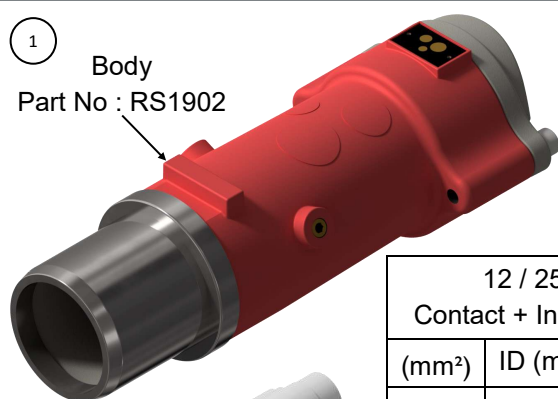

12 / 25 Style Contact + Insulator Sets		
(mm ²)	ID (mm)	Part No.
16	6.5	RS1942
25	7.5	RS1943
35	9.0	RS1944
50	10.5	RS1945
70	12.5	RS1946
95	14.0	RS1947
120	16.0	RS1948
150	17.7	RS1949
185	19.5	RS1950



Compression Gland Type		
*Ref.	Gland ID	Part No.
(A)	10-15	RS2175
(B)	15-20	RS2176
(C)	20-25	RS2177
(D)	25-30	RS2178
(G)	40-45	RS1620
(H)	45-50	RS1621
(I)	50-55	RS1622
(J)	55-60	RS1623
(K)	60-65	RS1624
(L)	65-70	RS1625
(M)	70-75	RS1626
(N)	75-80	RS1627

*Gland Reference Letter

TYPE: QRR336
(Not for Purchasing Use)


Body
Part No : RS1912QR

Receptacle Type to Suit mm ² Cable Tails		
(mm ²)	(Jack In) Part No.	(Quick Release) Part No.
16	RS1547	RS1547QR
25	RS1548	RS1548QR
35	RS1549	RS1549QR
50	RS1550	RS1550QR
70	RS1551	RS1551QR
95	RS1552	RS1552QR
120	RS1553	RS1553QR
150	RS1554	RS1554QR
185	RS1555	RS1555QR

TYPE: R336
(Not for Purchasing Use)

Body
Part No : RS1912

12 / 106 Style Contact + Insulator Sets		
(mm ²)	ID (mm)	Part No.
16	6.5	RS2088
25	7.5	RS2089
35	9.0	RS2090
50	10.5	RS2091
70	12.5	RS2092
95	14.0	RS2093
120	16.0	RS2094
150	17.7	RS2095
185	19.5	RS2096

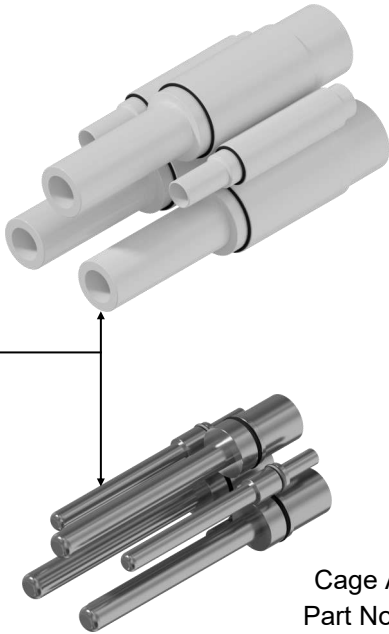


Cage Assembly
Part No : RS1917

<u>Termination Procedure</u>
PlugPage 31
Receptacle Page 32


AUSPROOF

3300V 425A

3 Phase 3 Pilot

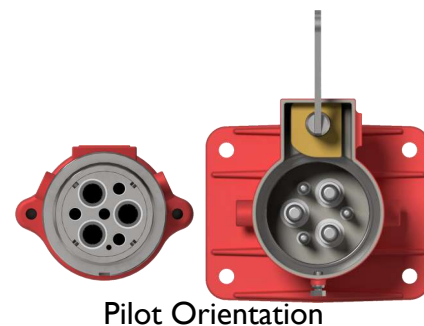



Pre-Built To Suit Cable Type

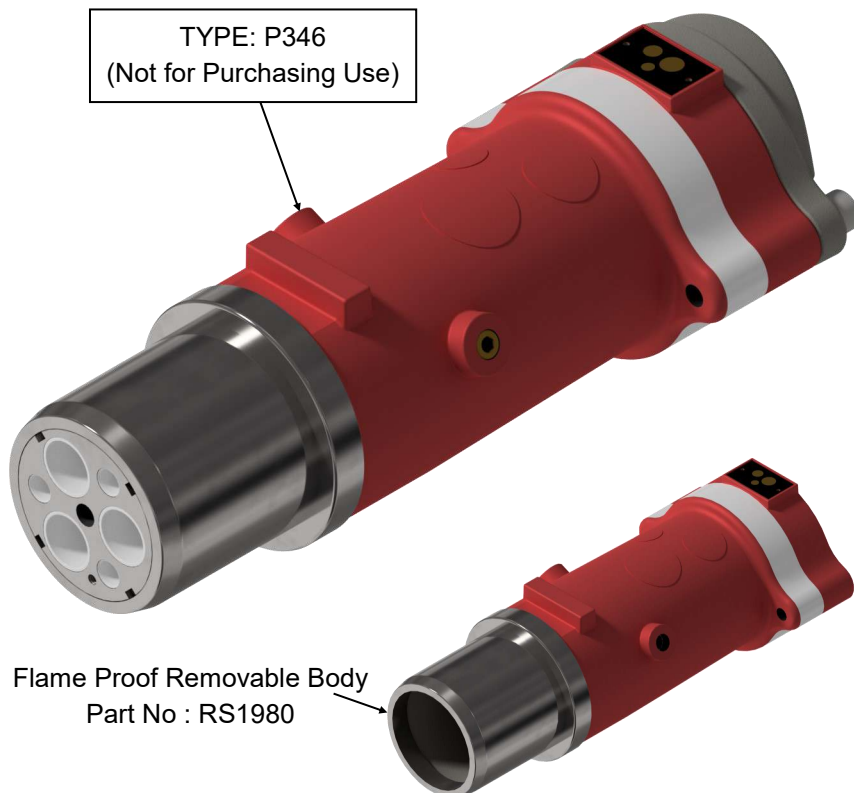


Plug Type To Suit 241.3 Cable				
(mm ²)	*Ref.	241.3	*Ref.	245.3
16	(E)	RS1574	-	-
25	(F)	RS1575	-	-
35	(G)	RS1576	-	-
50	(H)	RS1577	(J)	RS2170
70	(I)	RS1578	(K)	RS2171
95	(J)	RS1579	(L)	RS2172
120	(K)	RS1580	(M)	RS2173
150	(L)	RS1581	(N)	RS2174
185	(M)	RS1582	-	-

*Gland Reference Letter

Part Breakdown For Customized Cables; One Of Each Type Required

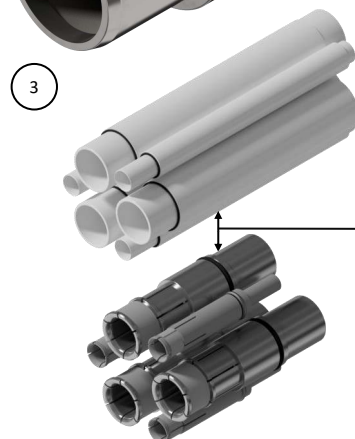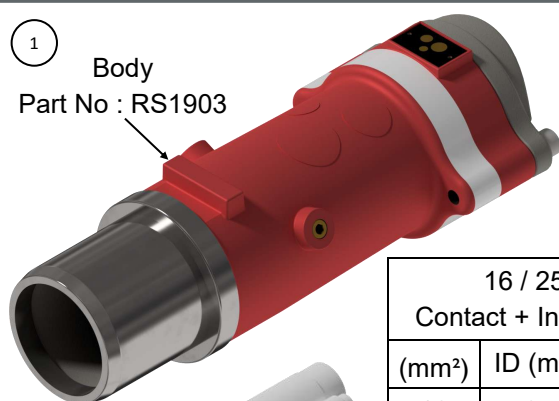

16 / 25 Style Contact + Insulator Sets		
(mm ²)	ID (mm)	Part No.
16	6.5	RS1951
25	7.5	RS1952
35	9.0	RS1953
50	10.5	RS1954
70	12.5	RS1955
95	14.0	RS1956
120	16.0	RS1957
150	17.7	RS1958
185	19.5	RS1959

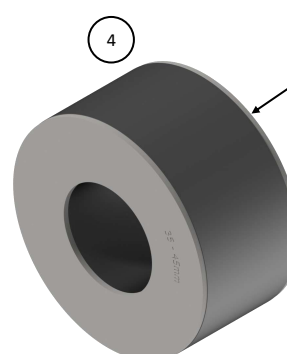


Compression Gland Type		
*Ref.	Gland ID	Part No.
(A)	10-15	RS2175
(B)	15-20	RS2176
(C)	20-25	RS2177
(D)	25-30	RS2178
(G)	40-45	RS1620
(H)	45-50	RS1621
(I)	50-55	RS1622
(J)	55-60	RS1623
(K)	60-65	RS1624
(L)	65-70	RS1625
(M)	70-75	RS1626
(N)	75-80	RS1627

*Gland Reference Letter

TYPE: QRR346
(Not for Purchasing Use)

Body
Part No : RS1913QR

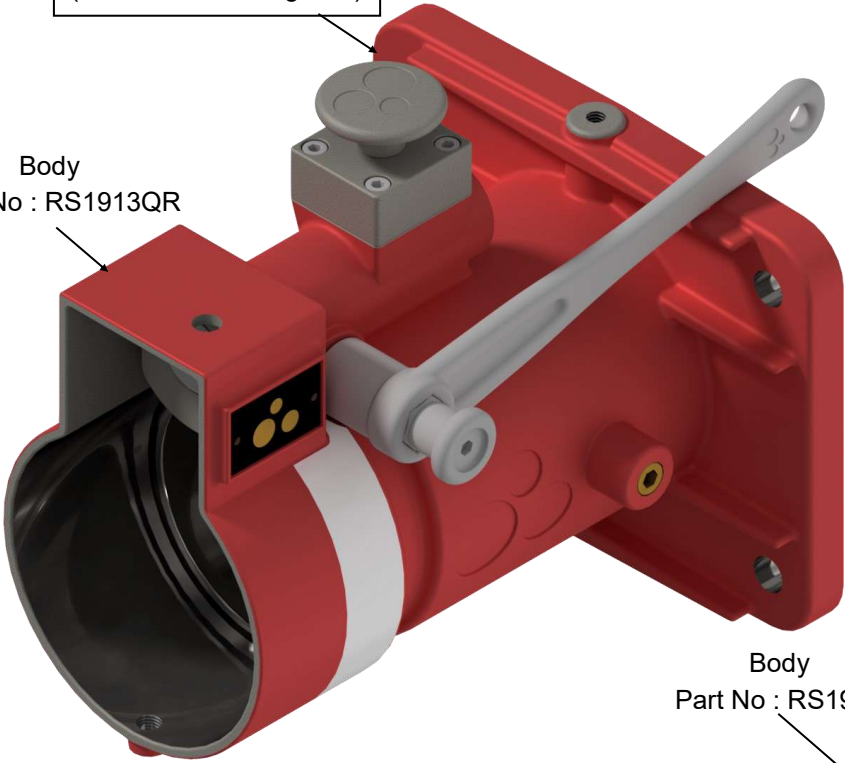


Receptacle Type to Suit mm² Cable Tails		
(mm²)	(Jack In) Part No.	(Quick Release) Part No.
16	RS1583	RS1583QR
25	RS1584	RS1584QR
35	RS1585	RS1585QR
50	RS1586	RS1586QR
70	RS1587	RS1587QR
95	RS1588	RS1588QR
120	RS1589	RS1589QR
150	RS1590	RS1590QR
185	RS1591	RS1591QR

TYPE: R346
(Not for Purchasing Use)

Body
Part No : RS1913



16 / 106 Style Contact + Insulator Sets		
(mm²)	ID (mm)	Part No.
16	6.5	RS2097
25	7.5	RS2098
35	9.0	RS2099
50	10.5	RS2100
70	12.5	RS2101
95	14.0	RS2102
120	16.0	RS2103
150	17.7	RS2104
185	19.5	RS2105

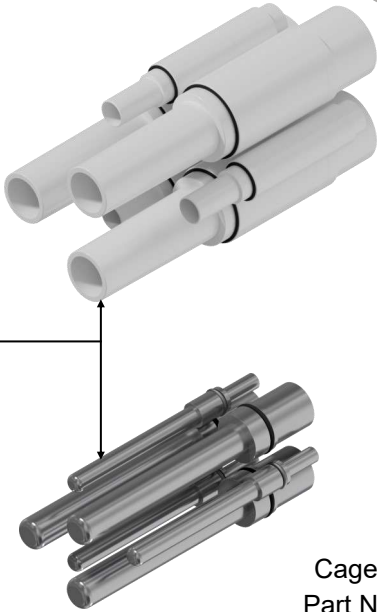


Cage Assembly
Part No : RS1917




Termination Procedure
PlugPage 31
Receptacle Page 32


3 Phase + 1 Pilot: 660V 150A, 1100V 150A

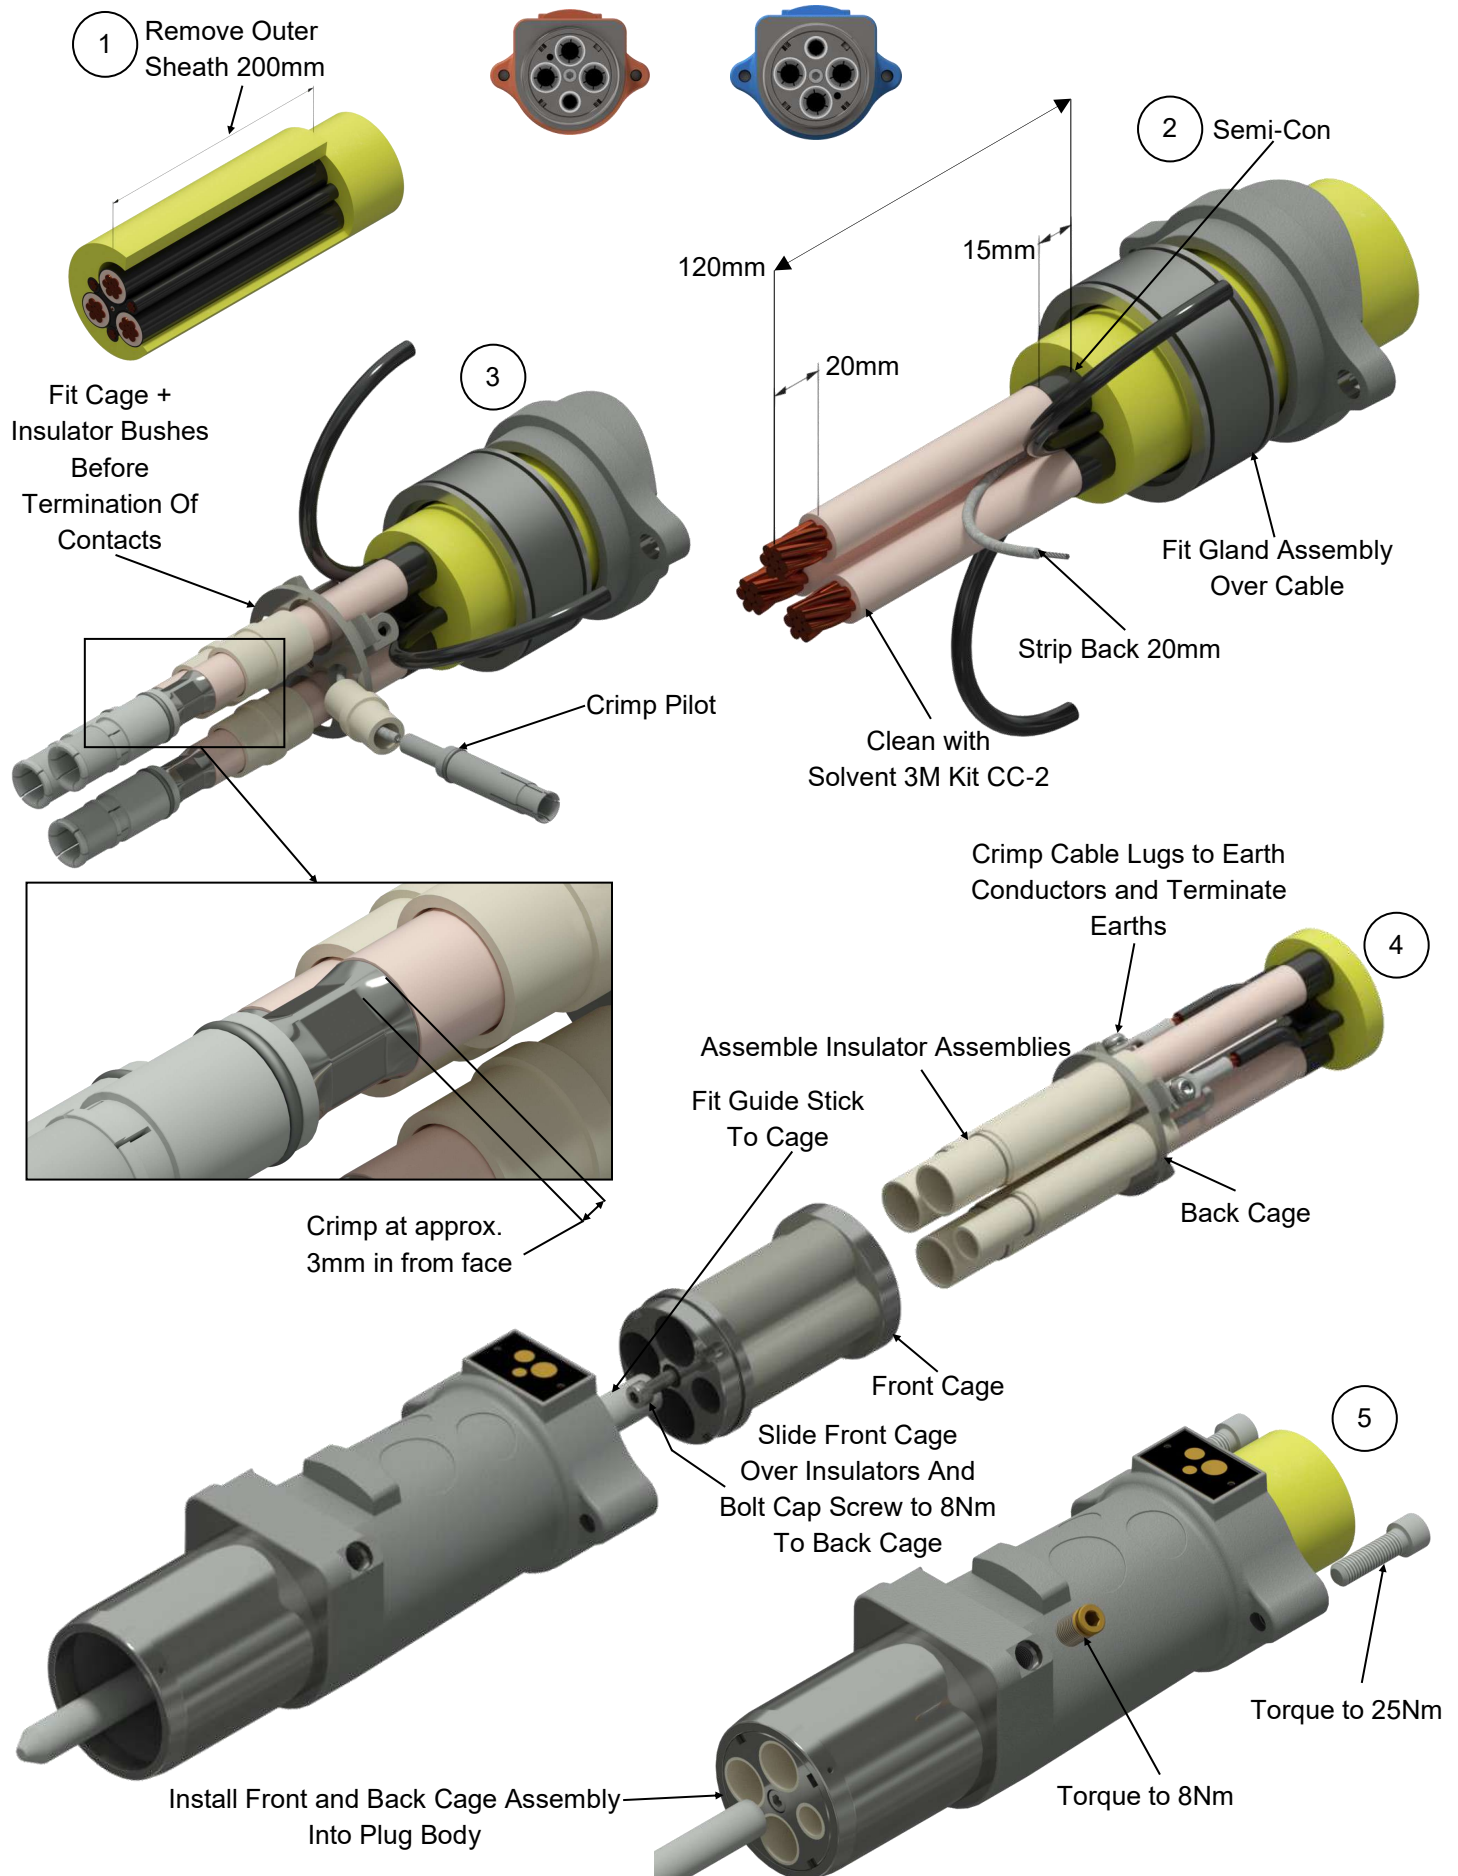


3 Phase + 1 Pilot: 660V 150A, 1100V 150A

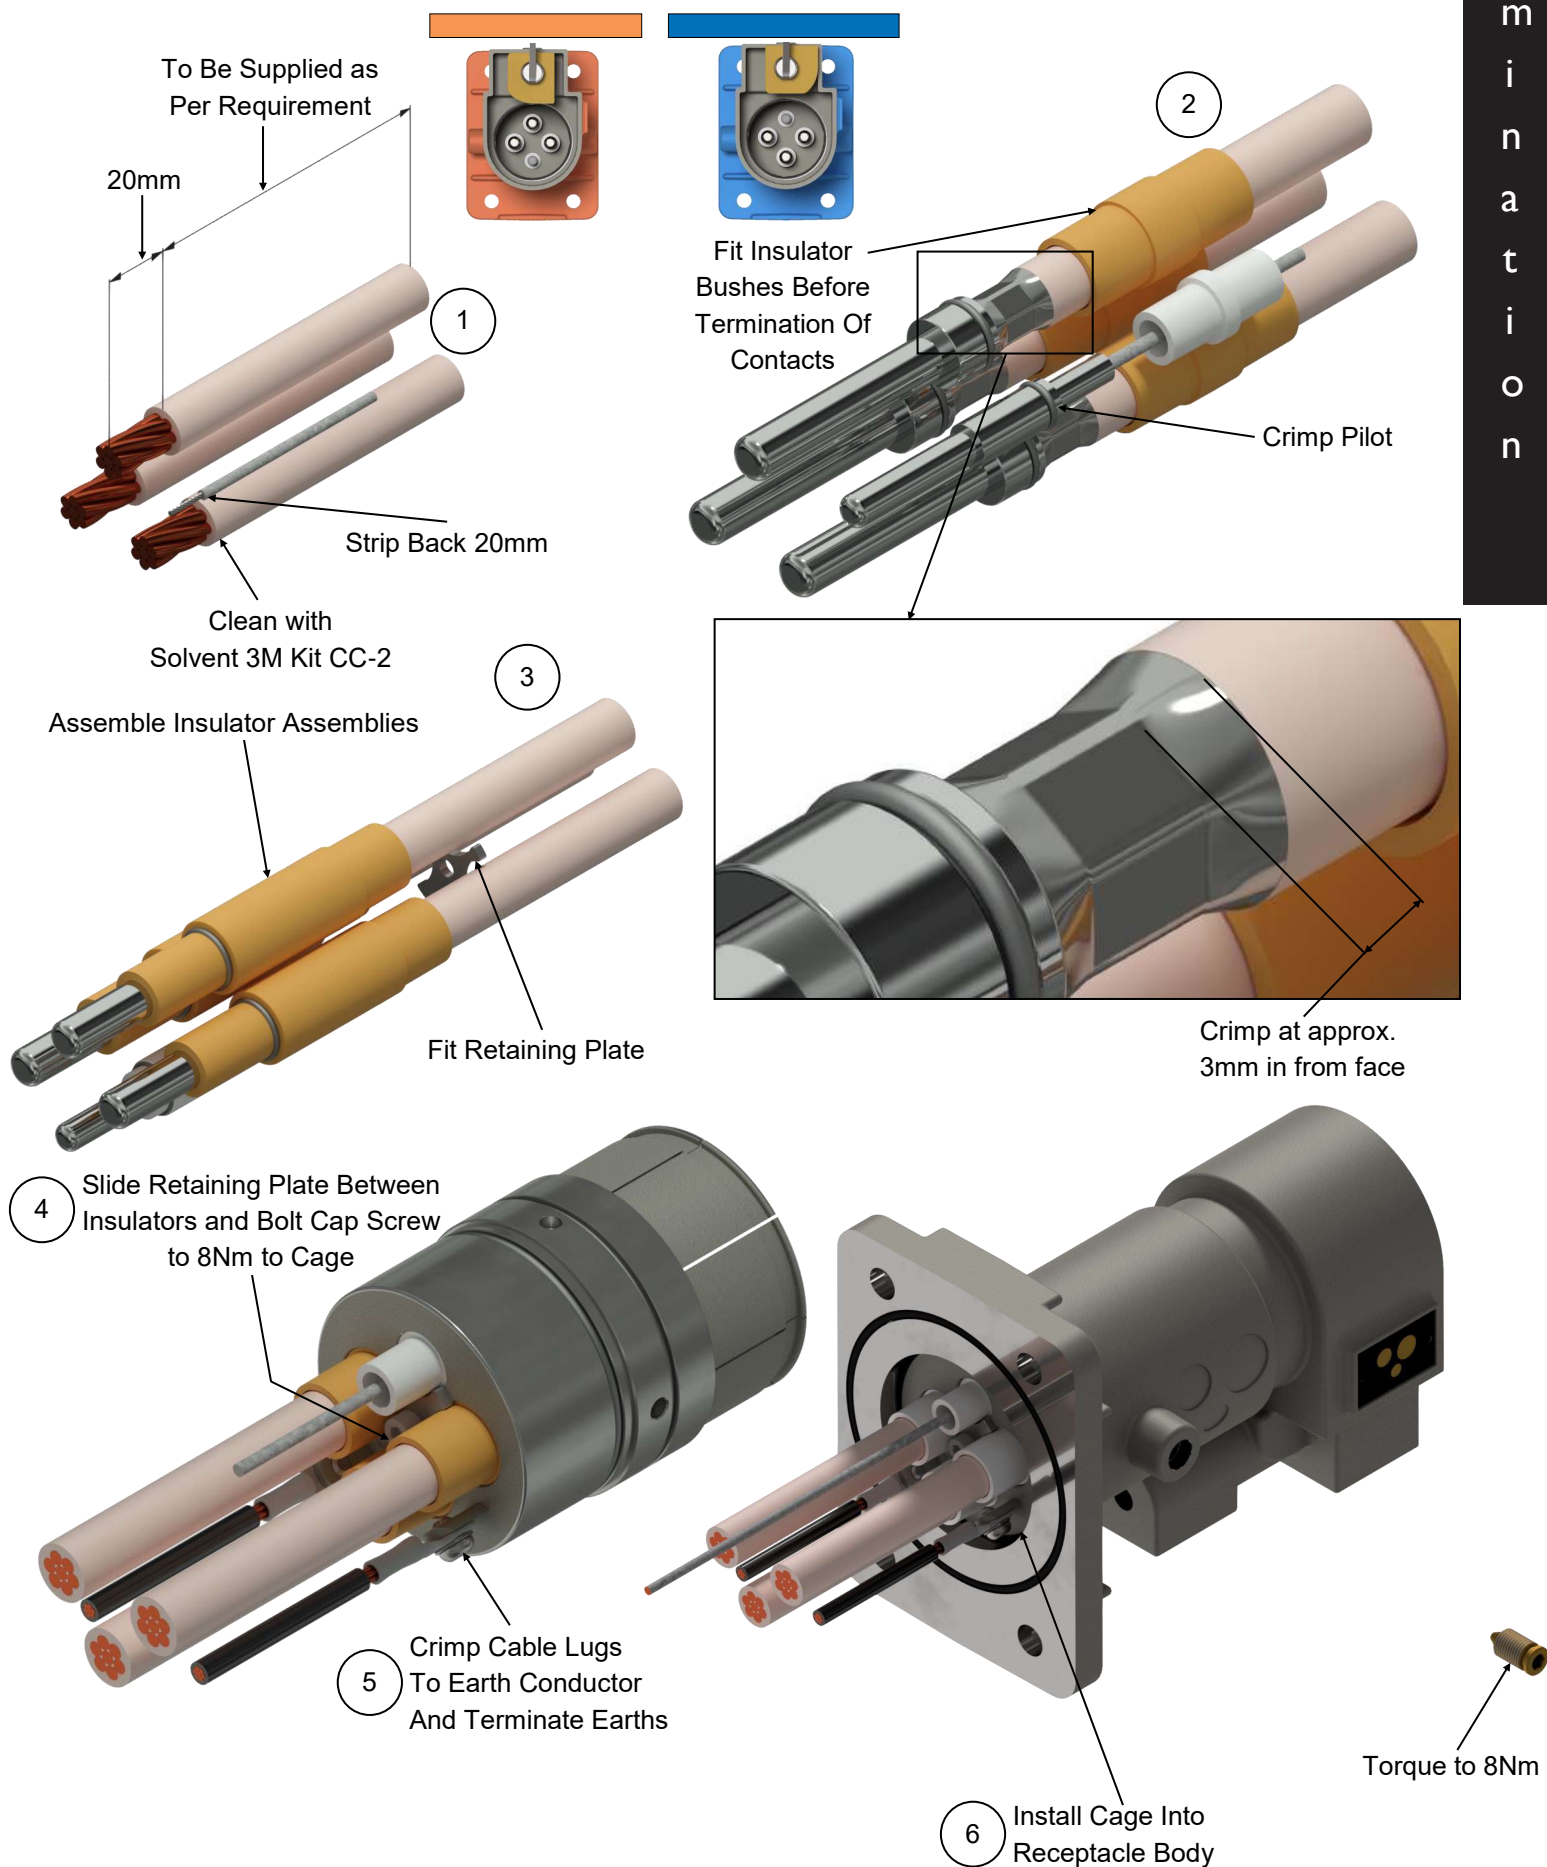


3 Phase + 1 Pilot: 660V 300A, 660V 425A, 1100V 300A, 1100V 425A

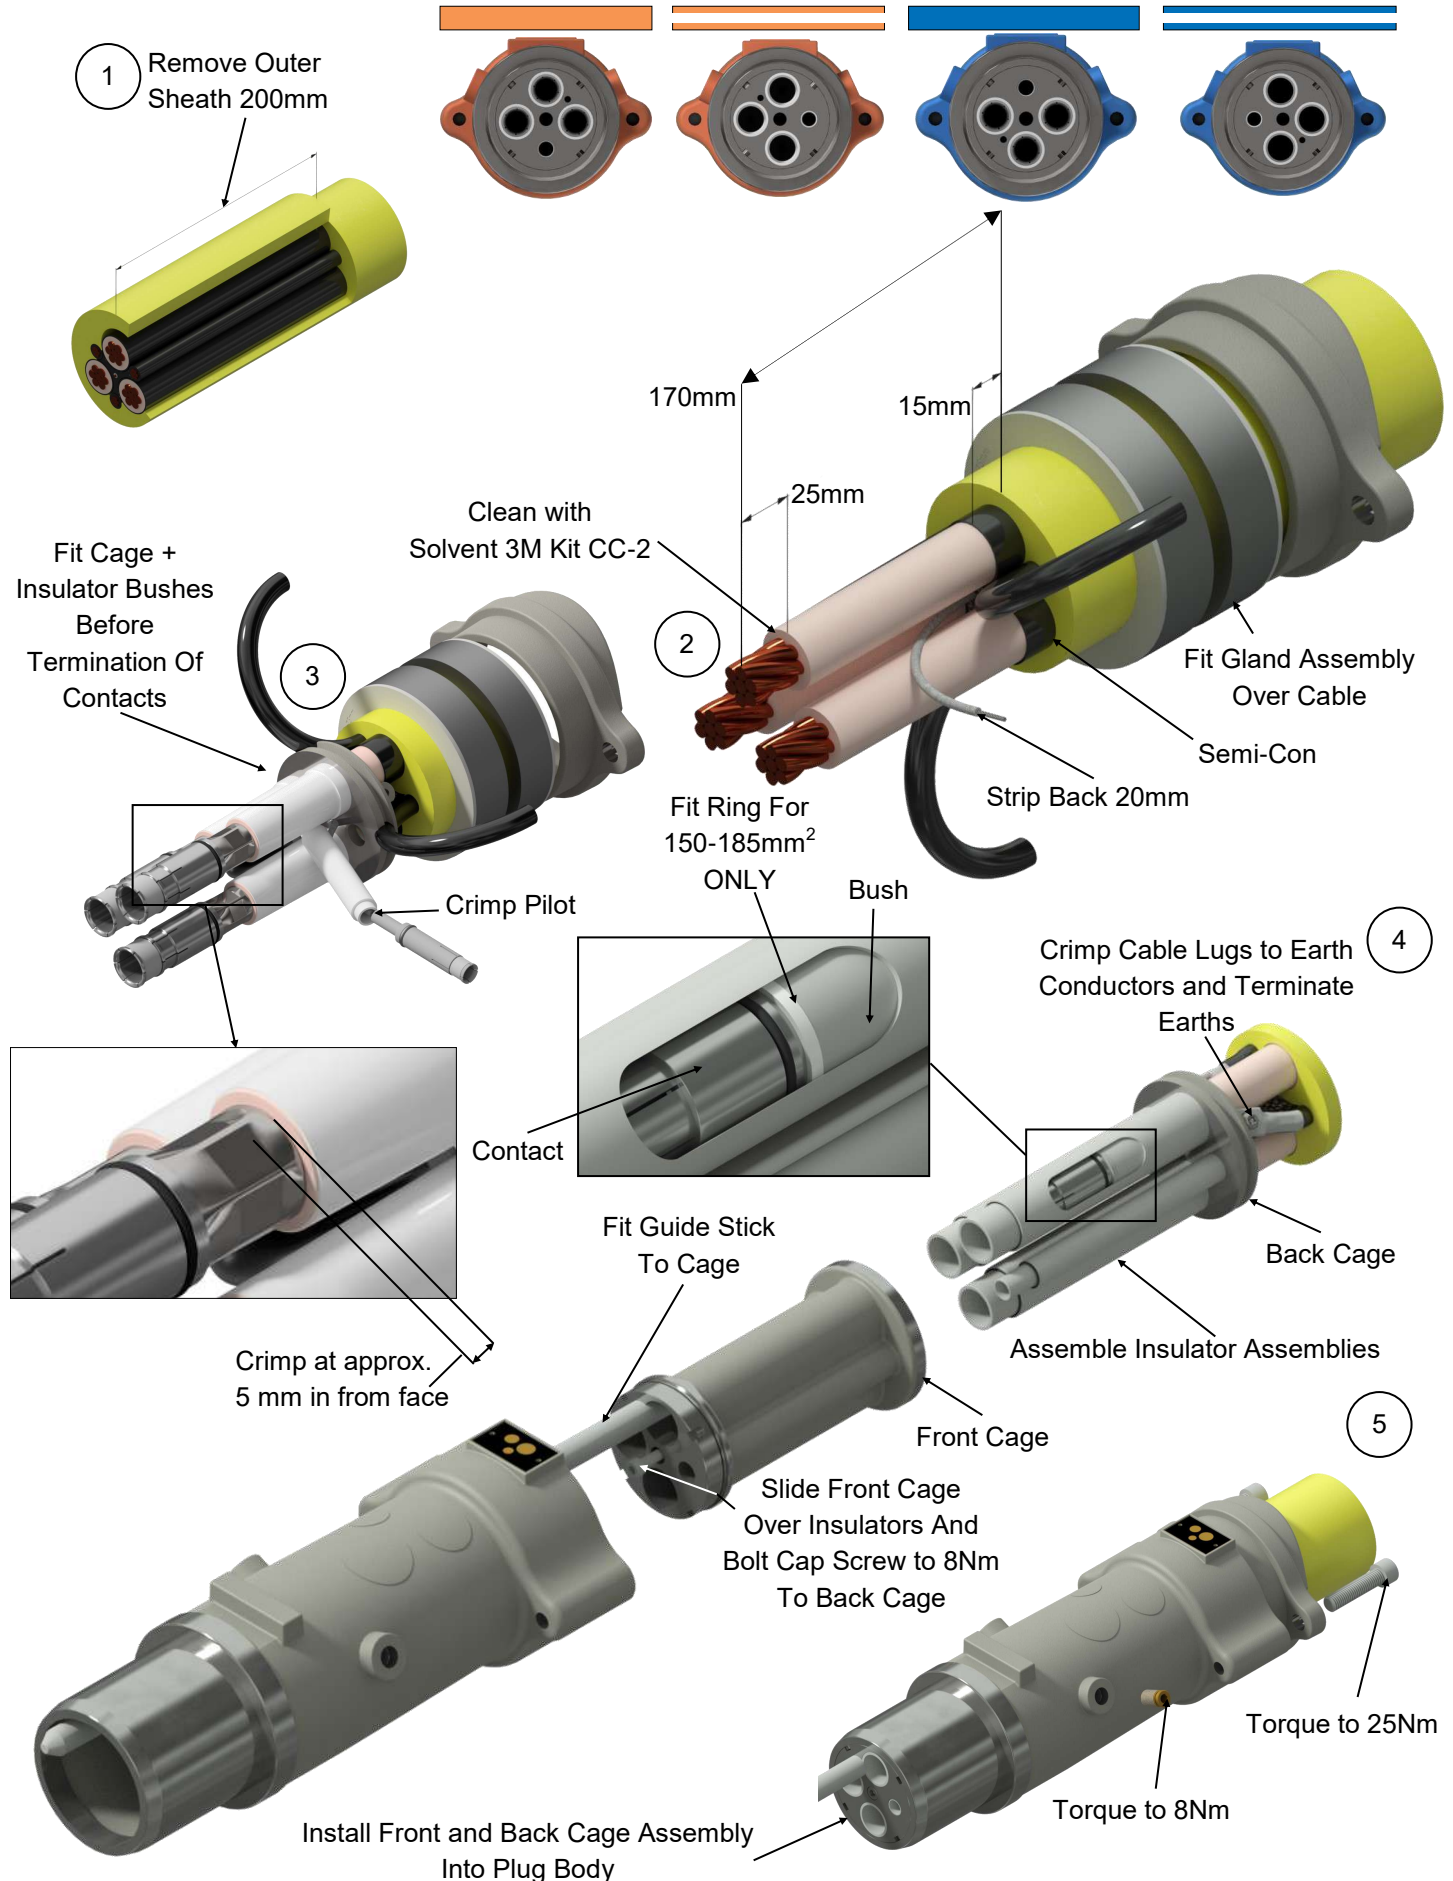


3 Phase + 1 Pilot: 660V 330A, 660V 425A, 1100V 300A, 1100V 425A

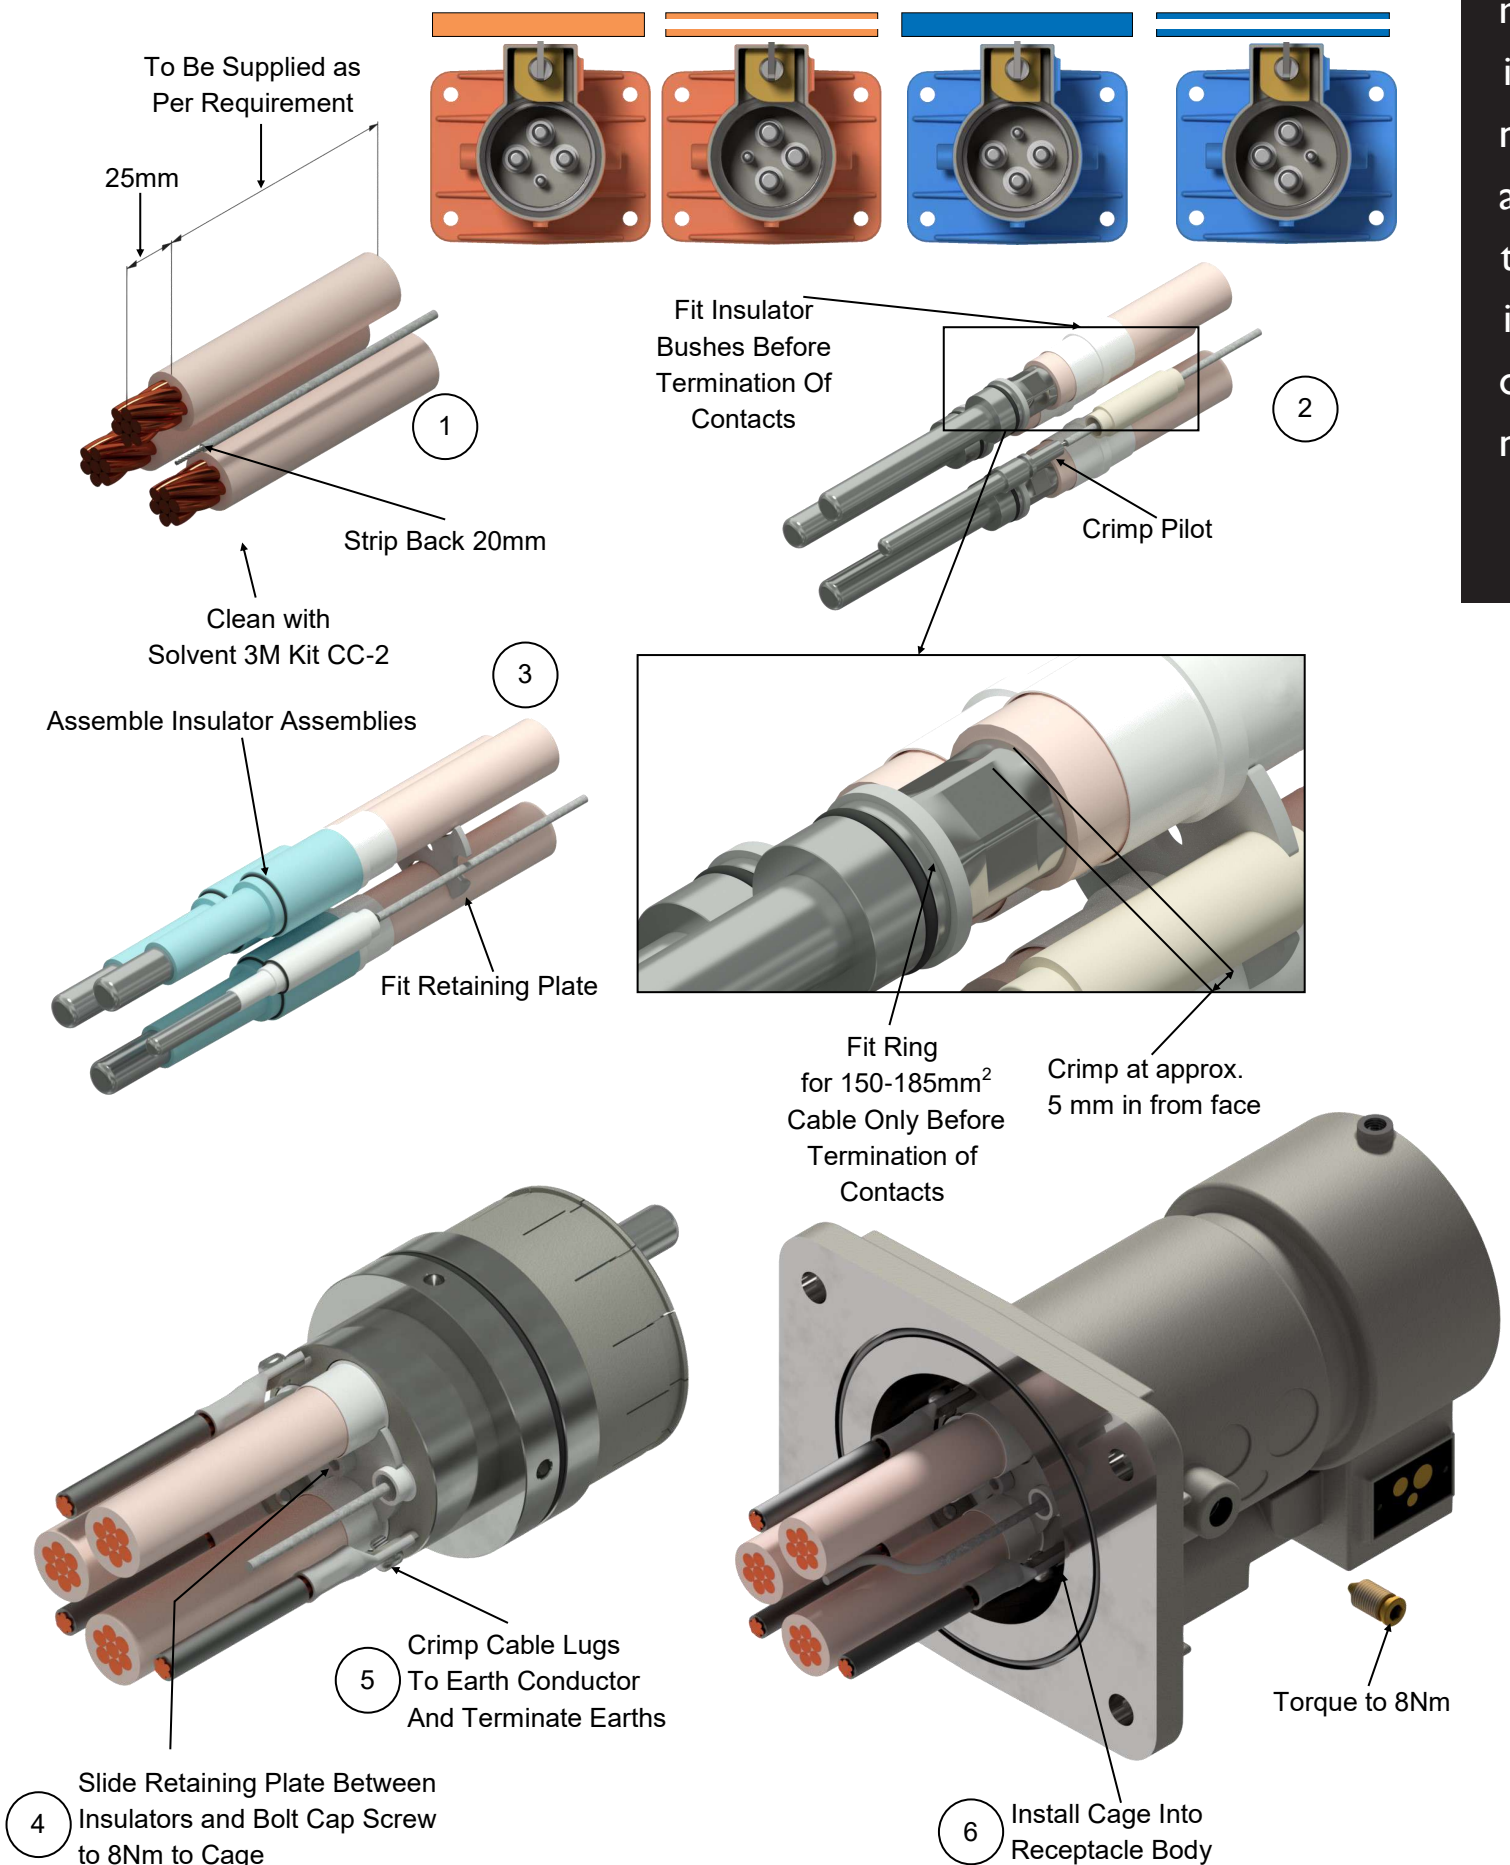


3 Phase + 3 Pilot: 1100V 300A, 1100V 425A, 3300V 300A, 3300V 425A

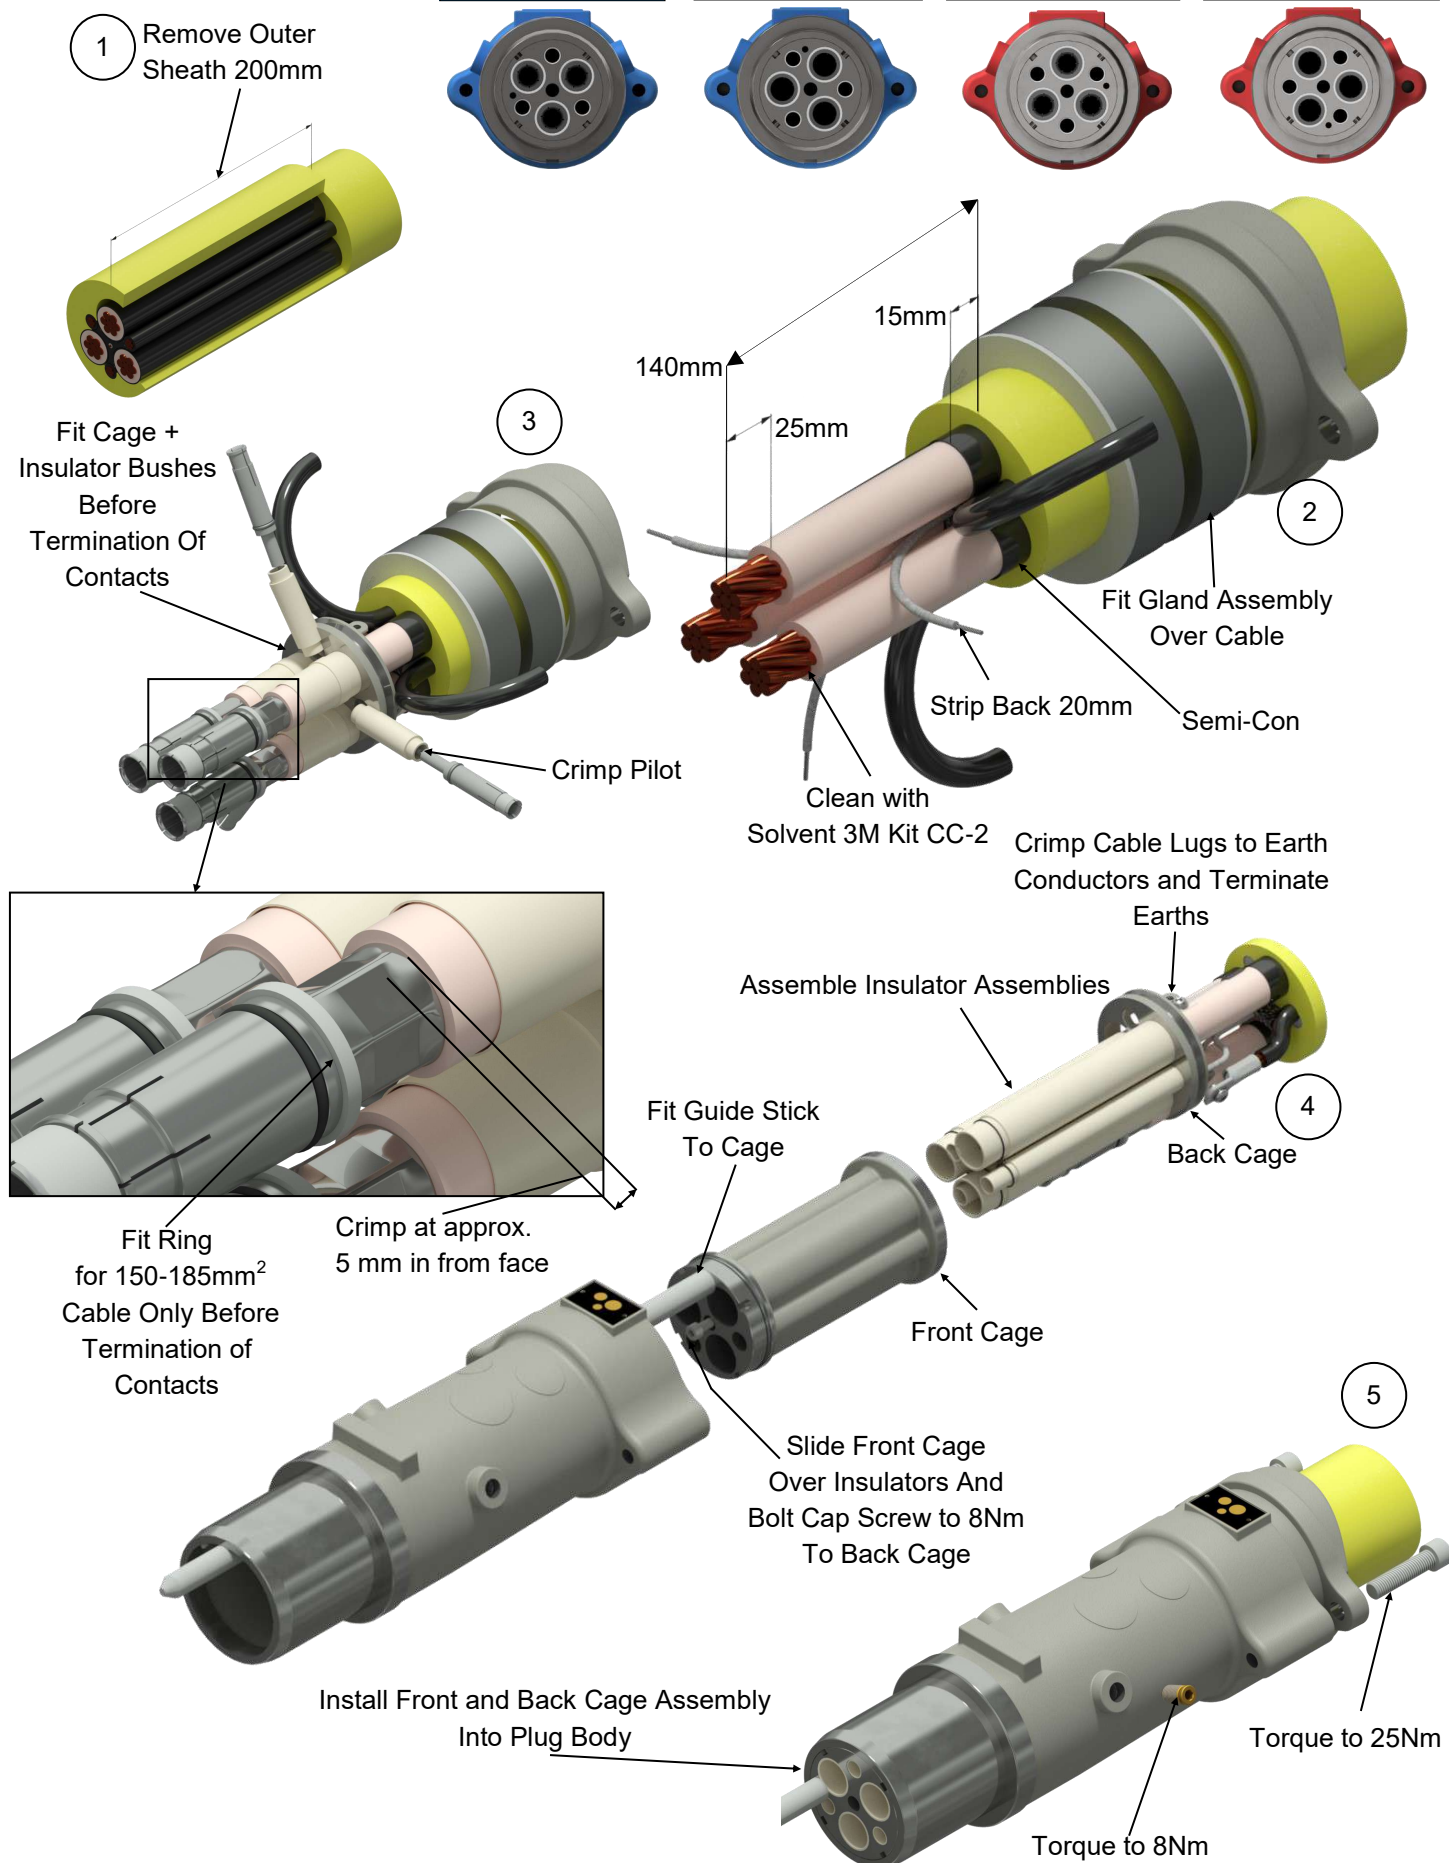


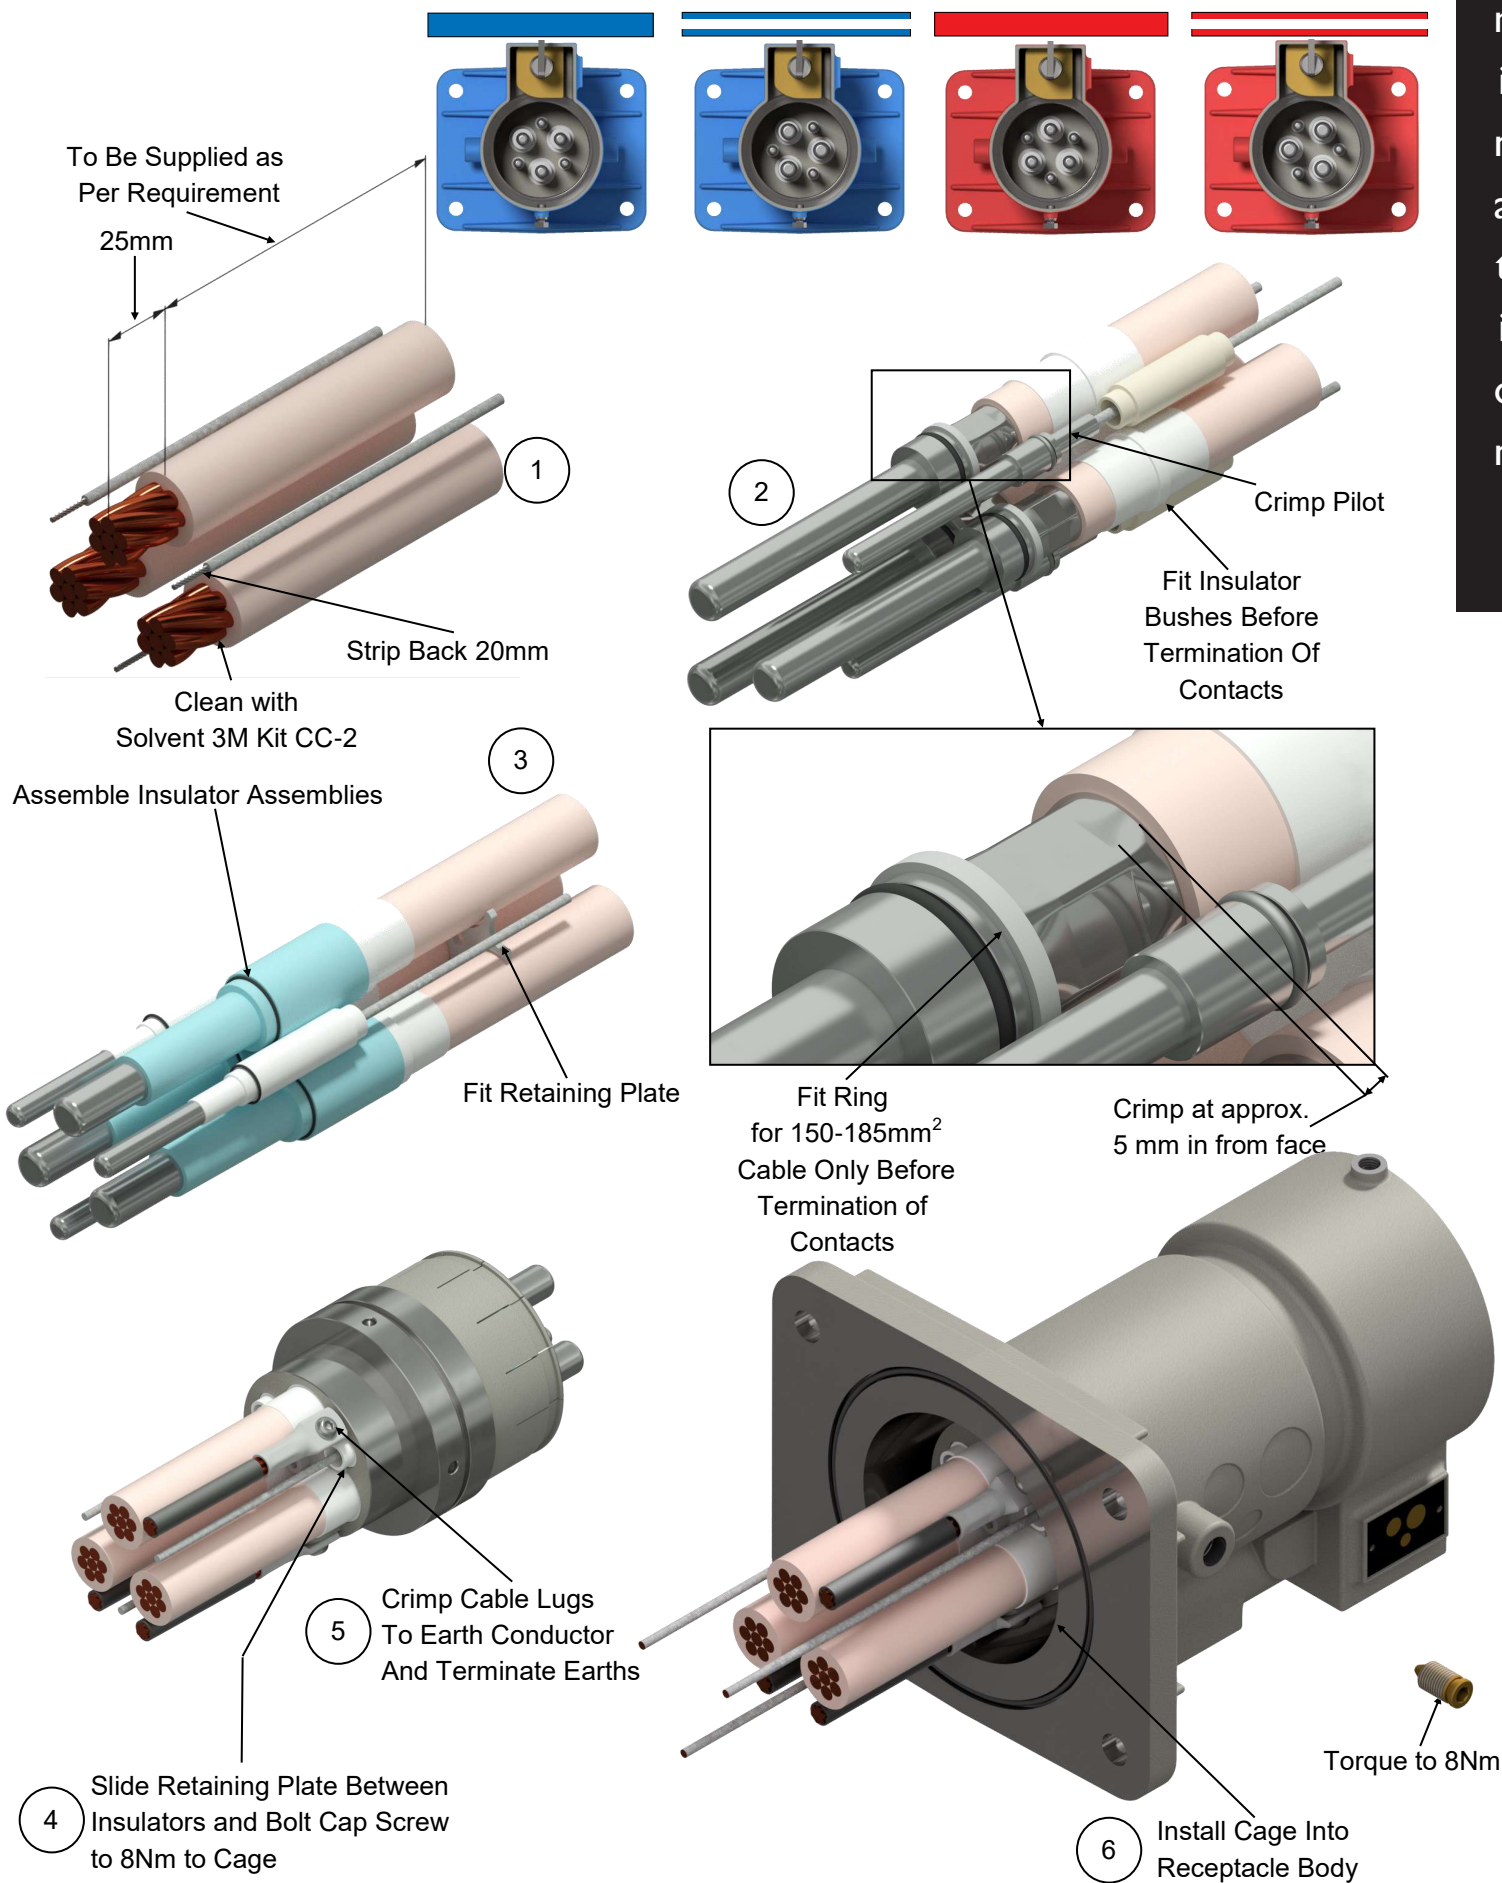


3 Phase + 1 Pilot: 3300V 300A, 3300V 425A

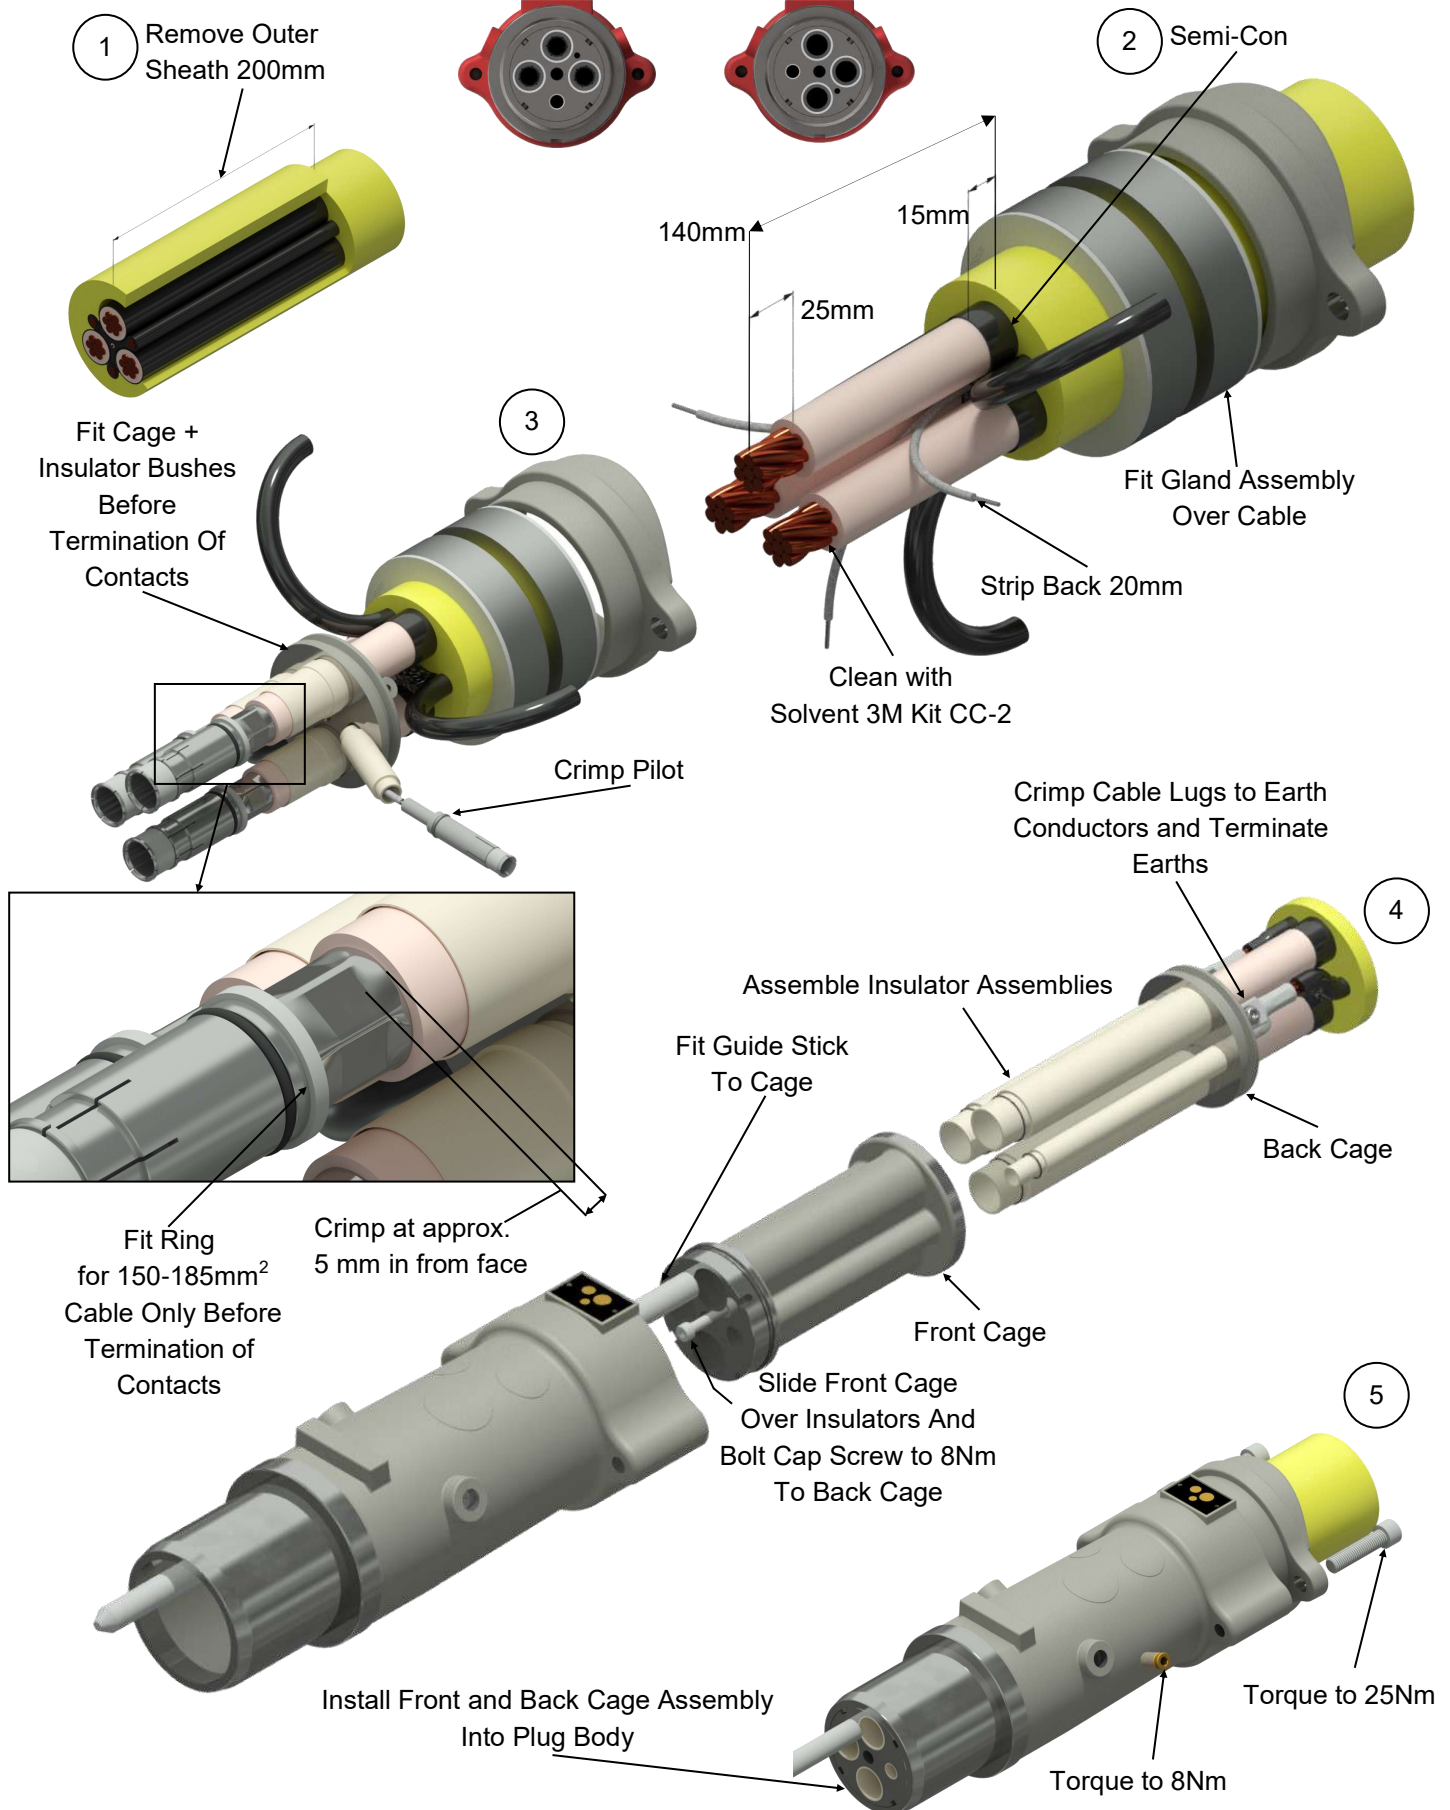

3 Phase + 1 Pilot: 3300V 300A, 3300V 425A

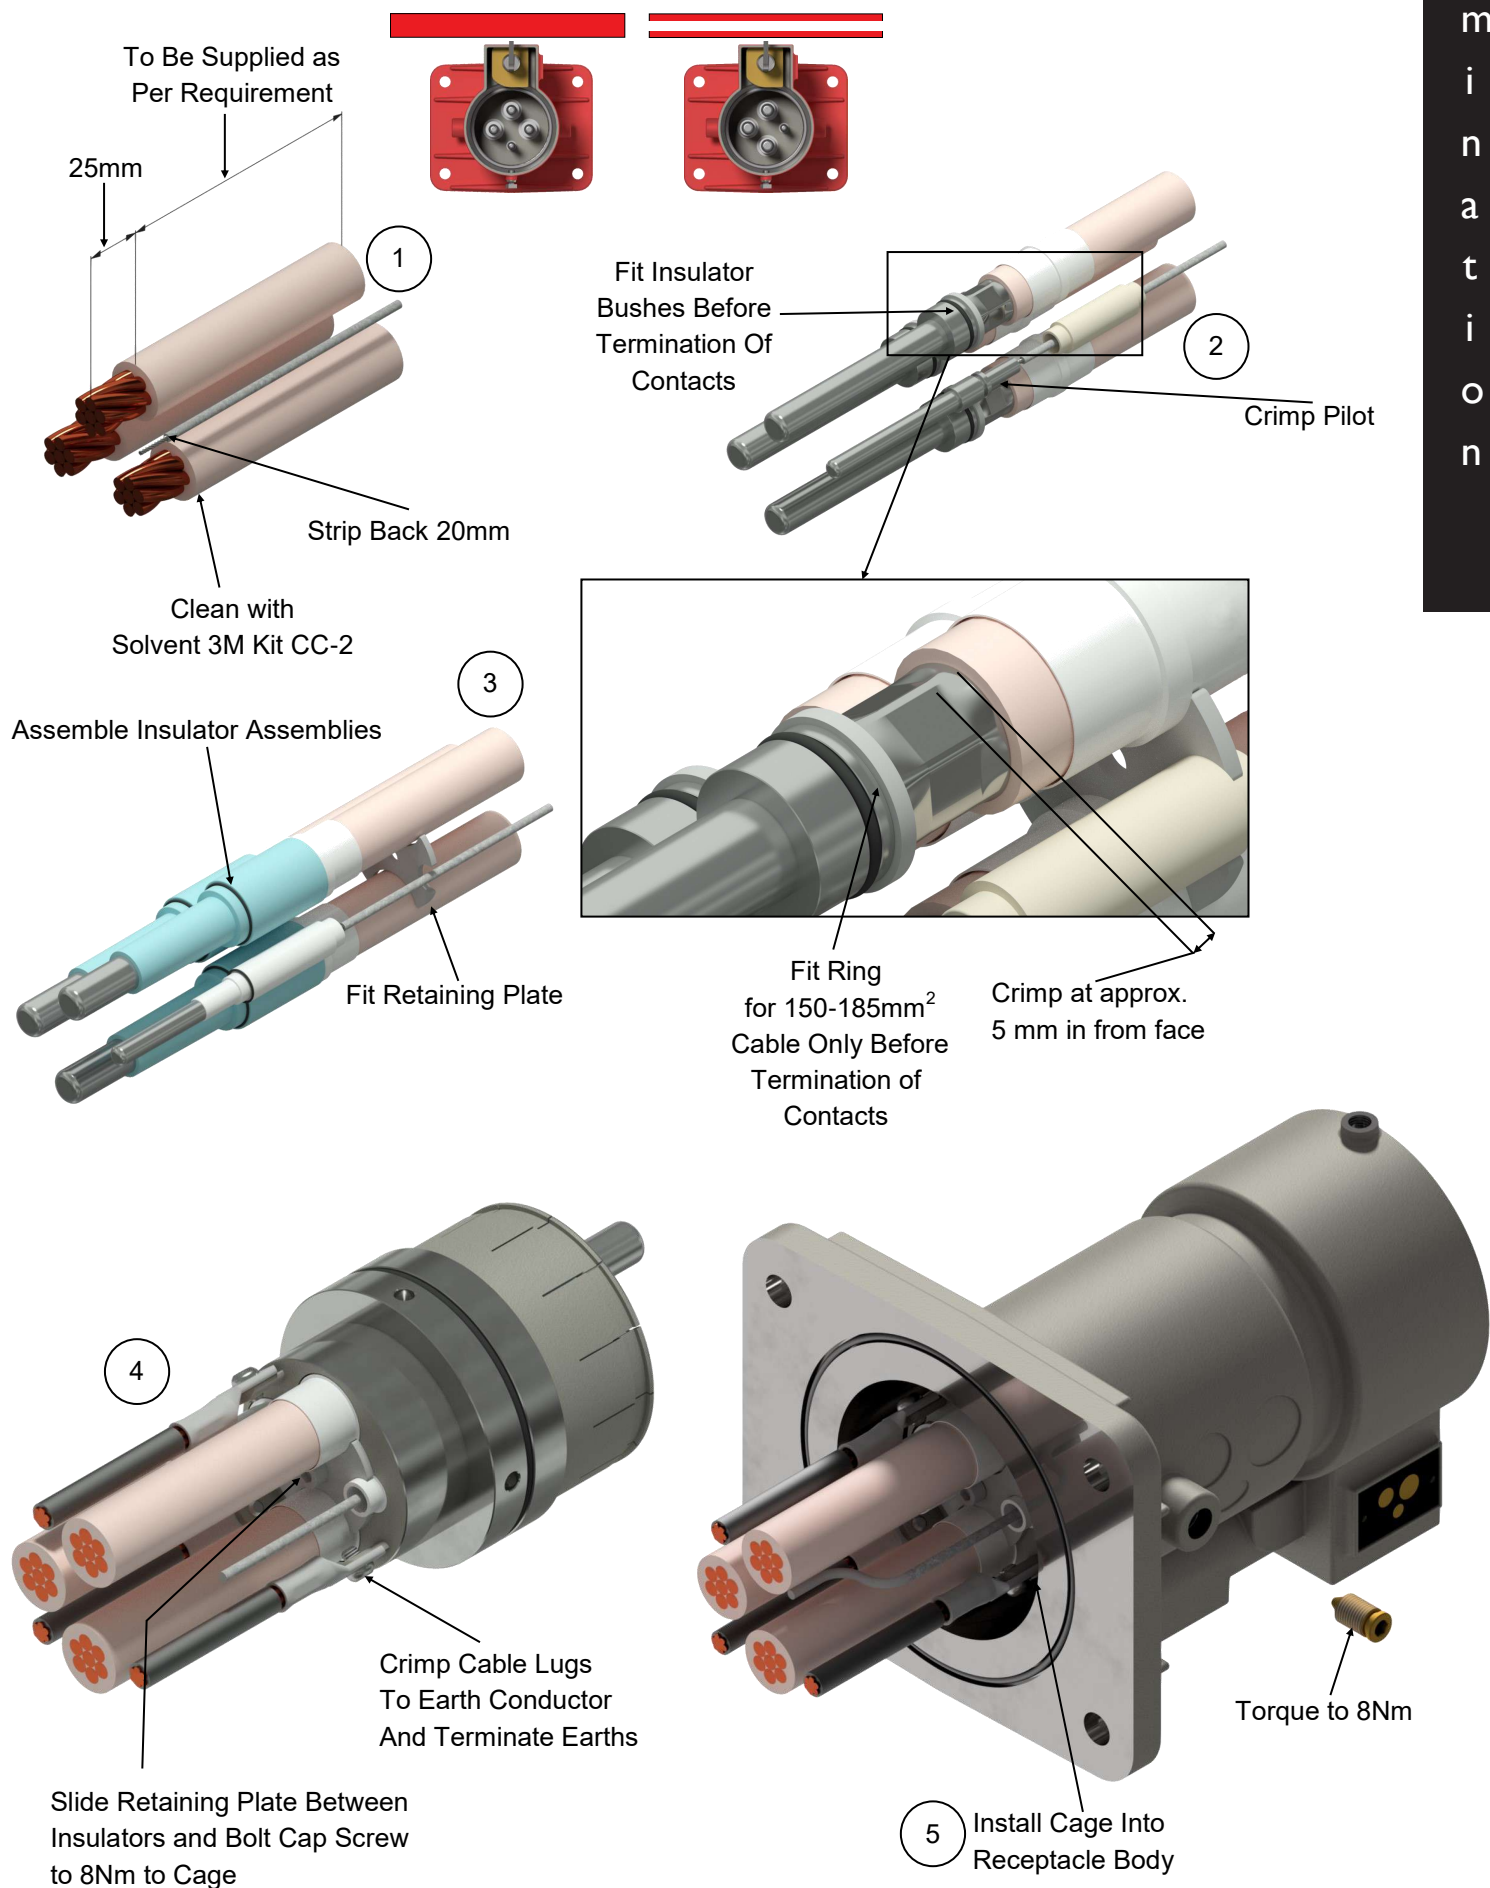

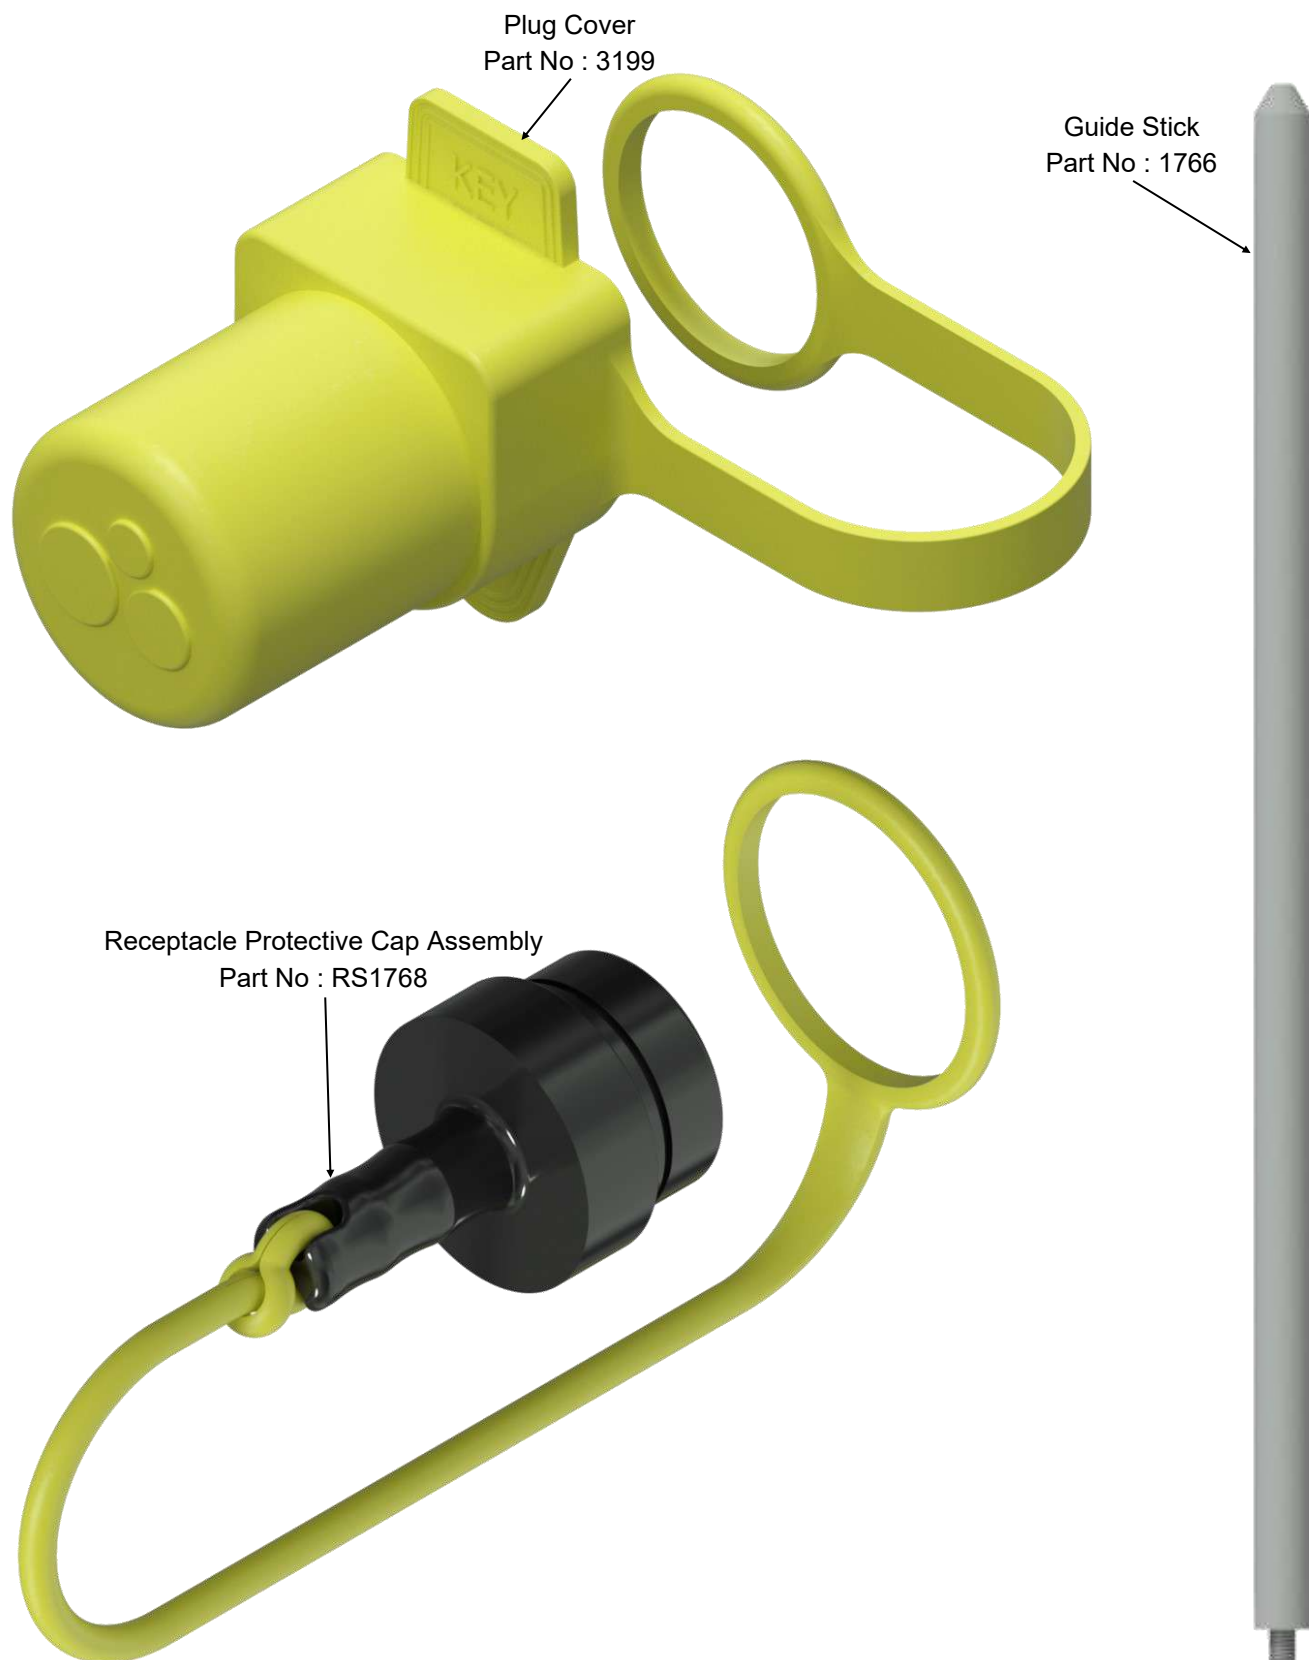

Plug Cover
Part No : 3202



Guide Stick
Part No : 1766





Receptacle Protective Cap Assembly
Part No : RS1767




AUSPROOF Handling


150 Series Suitable For 150A

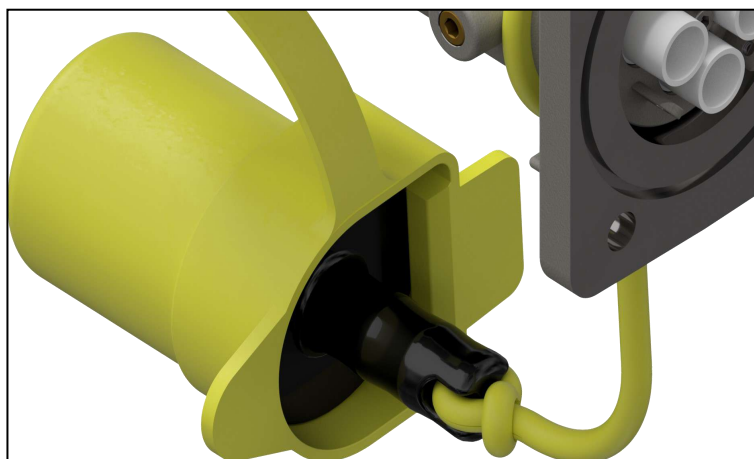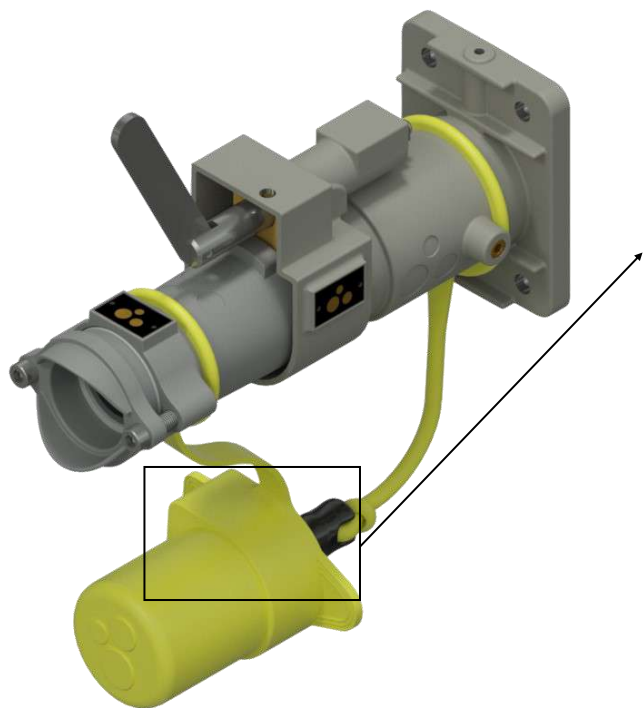


When Not In Use, Insert Receptacle Cap Into Silicone Plug Cover. Ensure Cap is Inserted Past the Rubber Key.

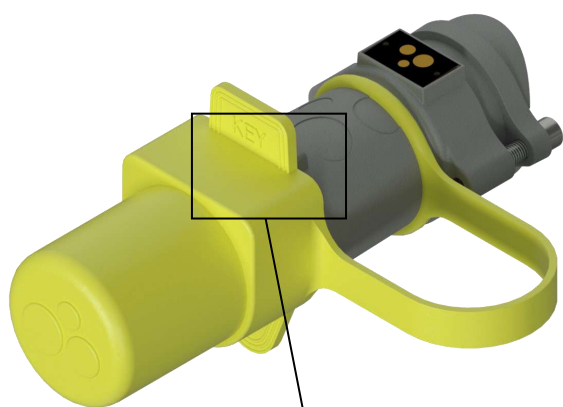


Ensure Key Is Engaged With Plug Body

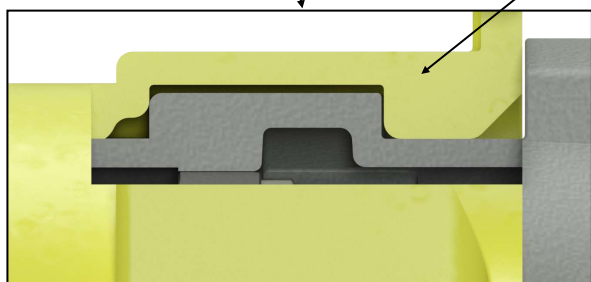

Plug Key Engagement

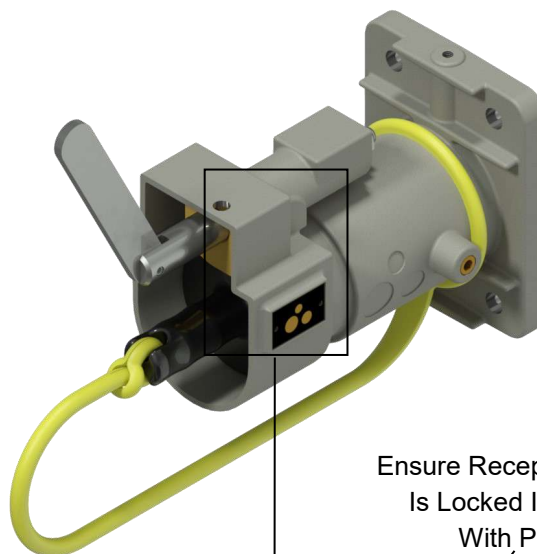



Ensure Receptacle Cap Is Locked In Place With Pawl

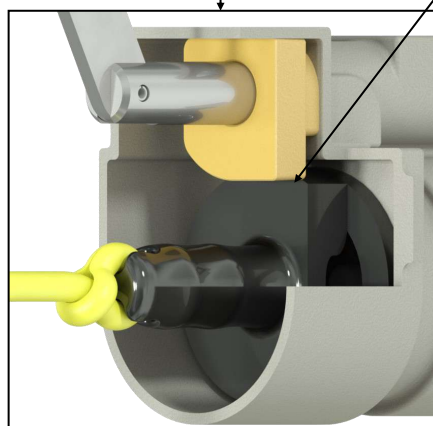


Receptacle Key Engagement

AUSPROOF Handling


300 Series Suitable For 300A And 425A

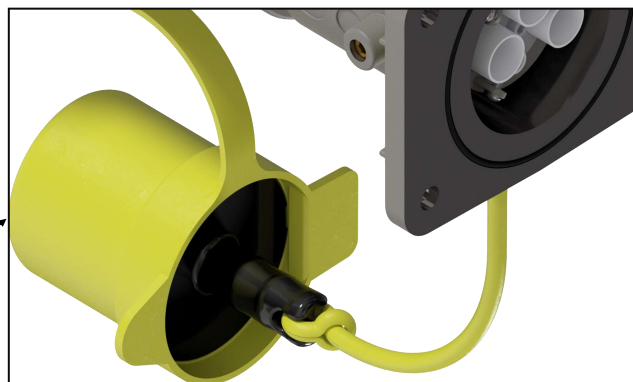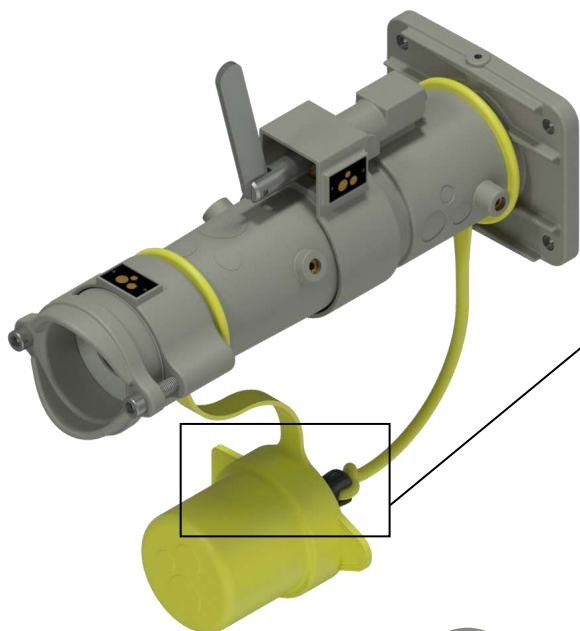


When Not In Use, Insert Receptacle Cap Into Silicone Plug Cover. Ensure Cap is Inserted Past the Rubber Key.

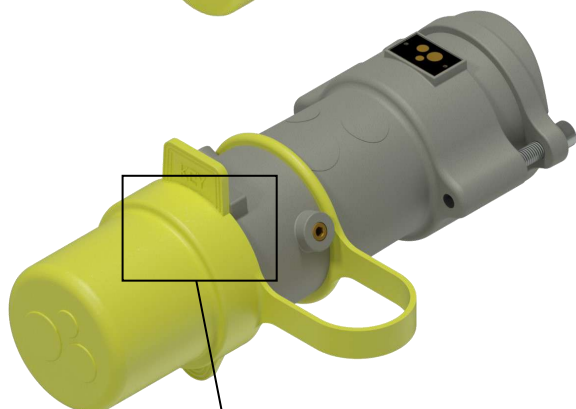


Ensure Key Is Engaged With Plug Body

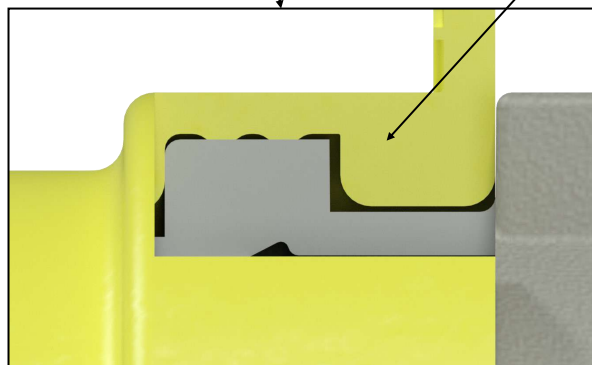

Plug Key Engagement

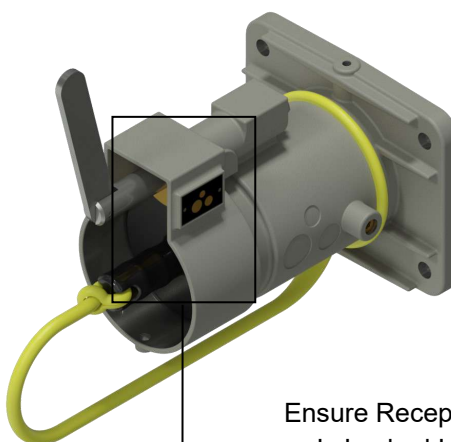

Ensure Receptacle Cap Is Locked In Place With Pawl

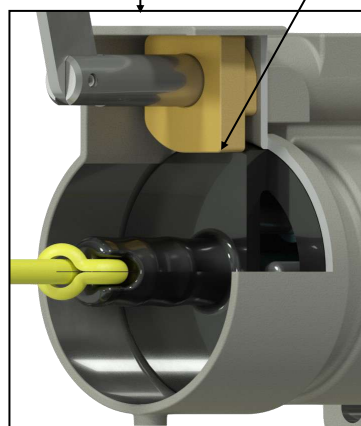


Receptacle Key Engagement

AUSPROOF


Receptacle Mounting

150A

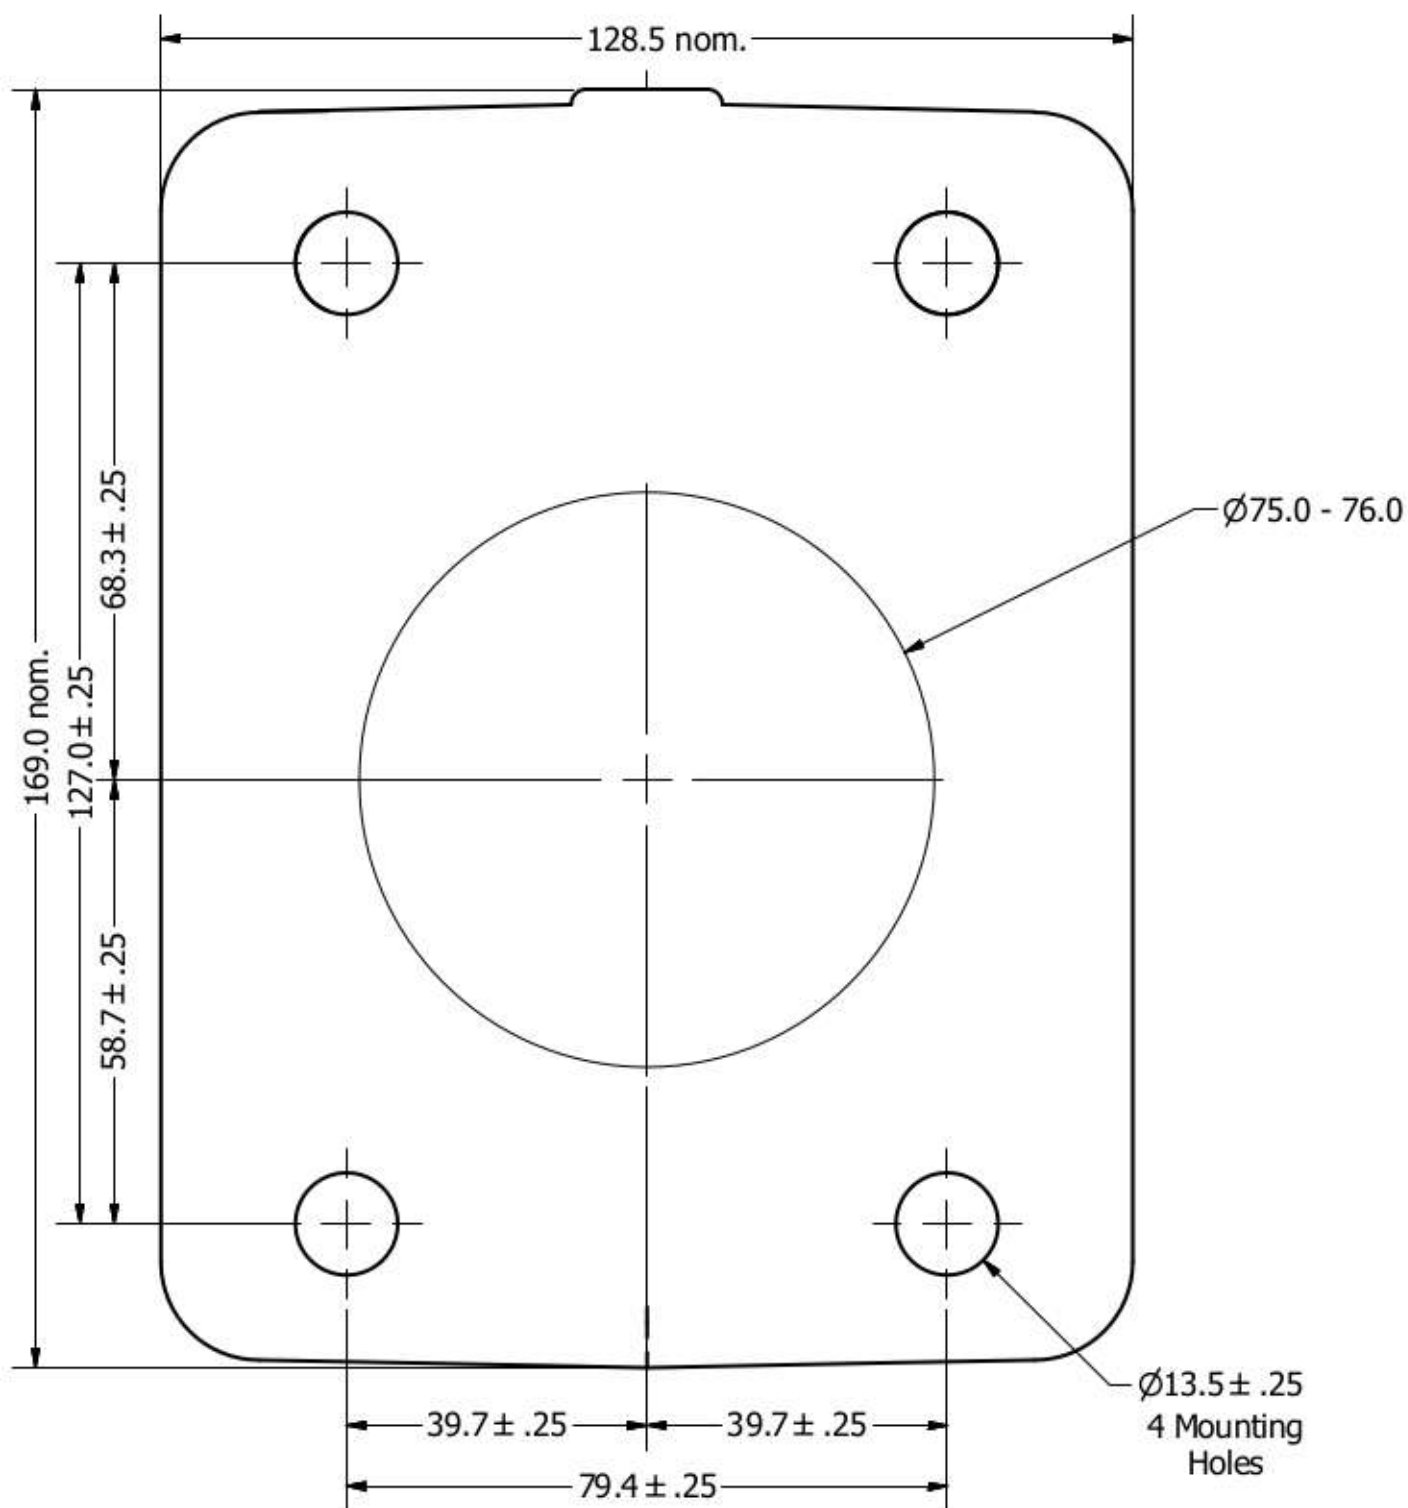

Receptacle Mounting

300—425A

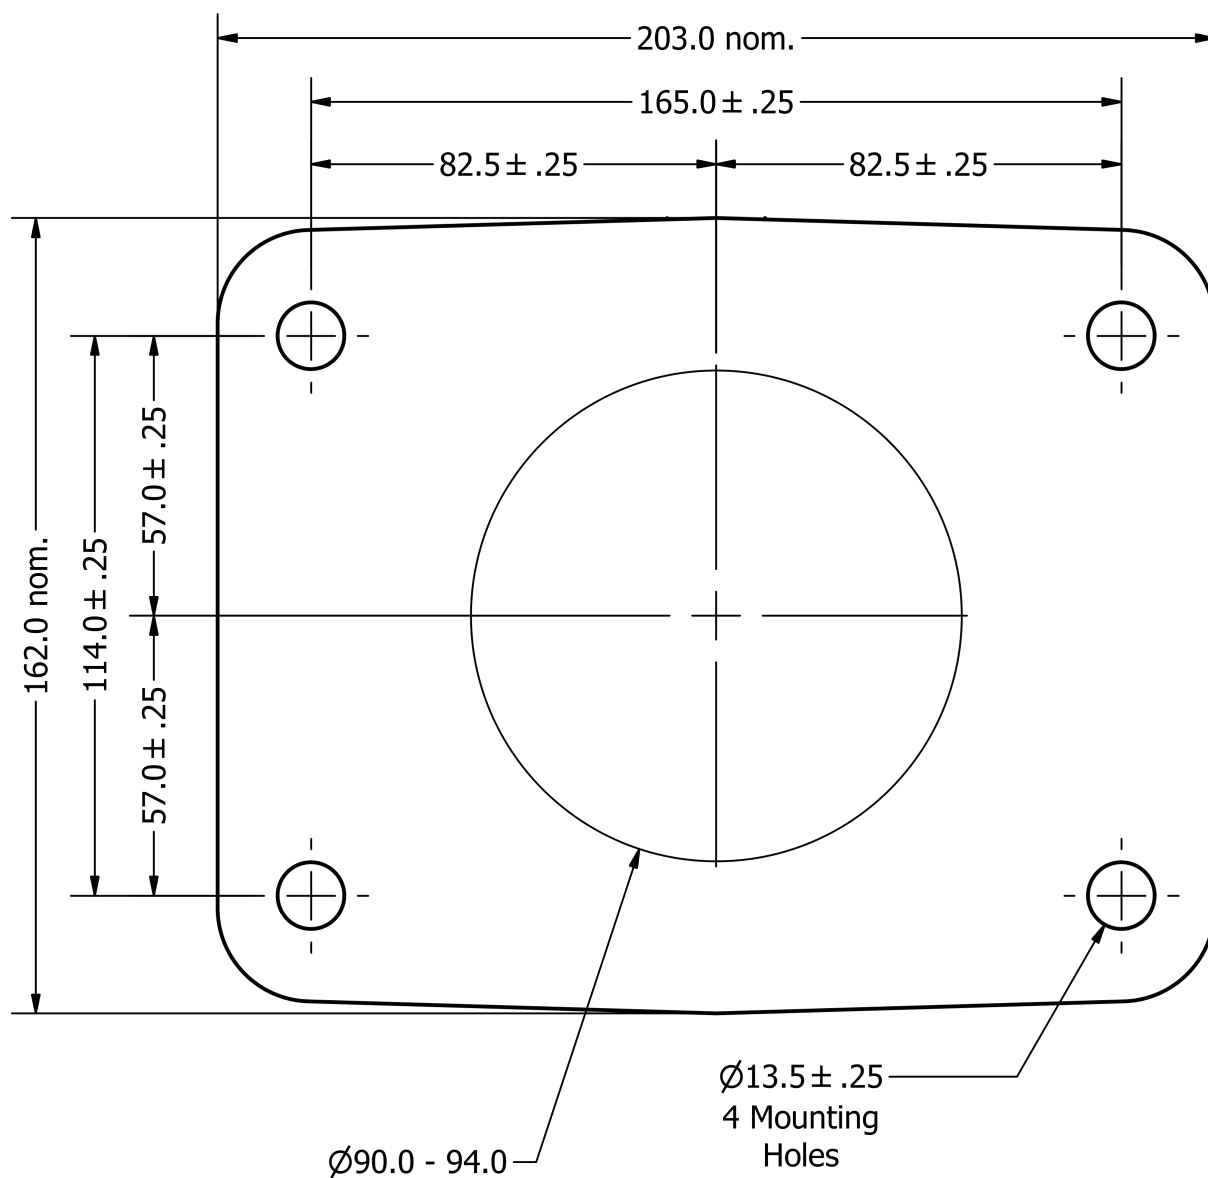

AUSPROOF


Flamepath Detail

150A

Legend	
	Flamepath
	Plug Insulators
	Plug Body
	Receptacle Body
	Receptacle Insulators
	Contacts
	Cage
	Cage Locking Screw

Flamepaths are not intended to be repaired. For further specifications on Flamepath joints, contact manufacturer for dimensions and tolerances.

Plug and Receptacle Disengagement Order
Pilot/Auxiliary – Phase
Contacts – Scraping Earth
– Flameproof Path.
 Pilot disengages first providing electrical insulation of phase during disconnection sequence.

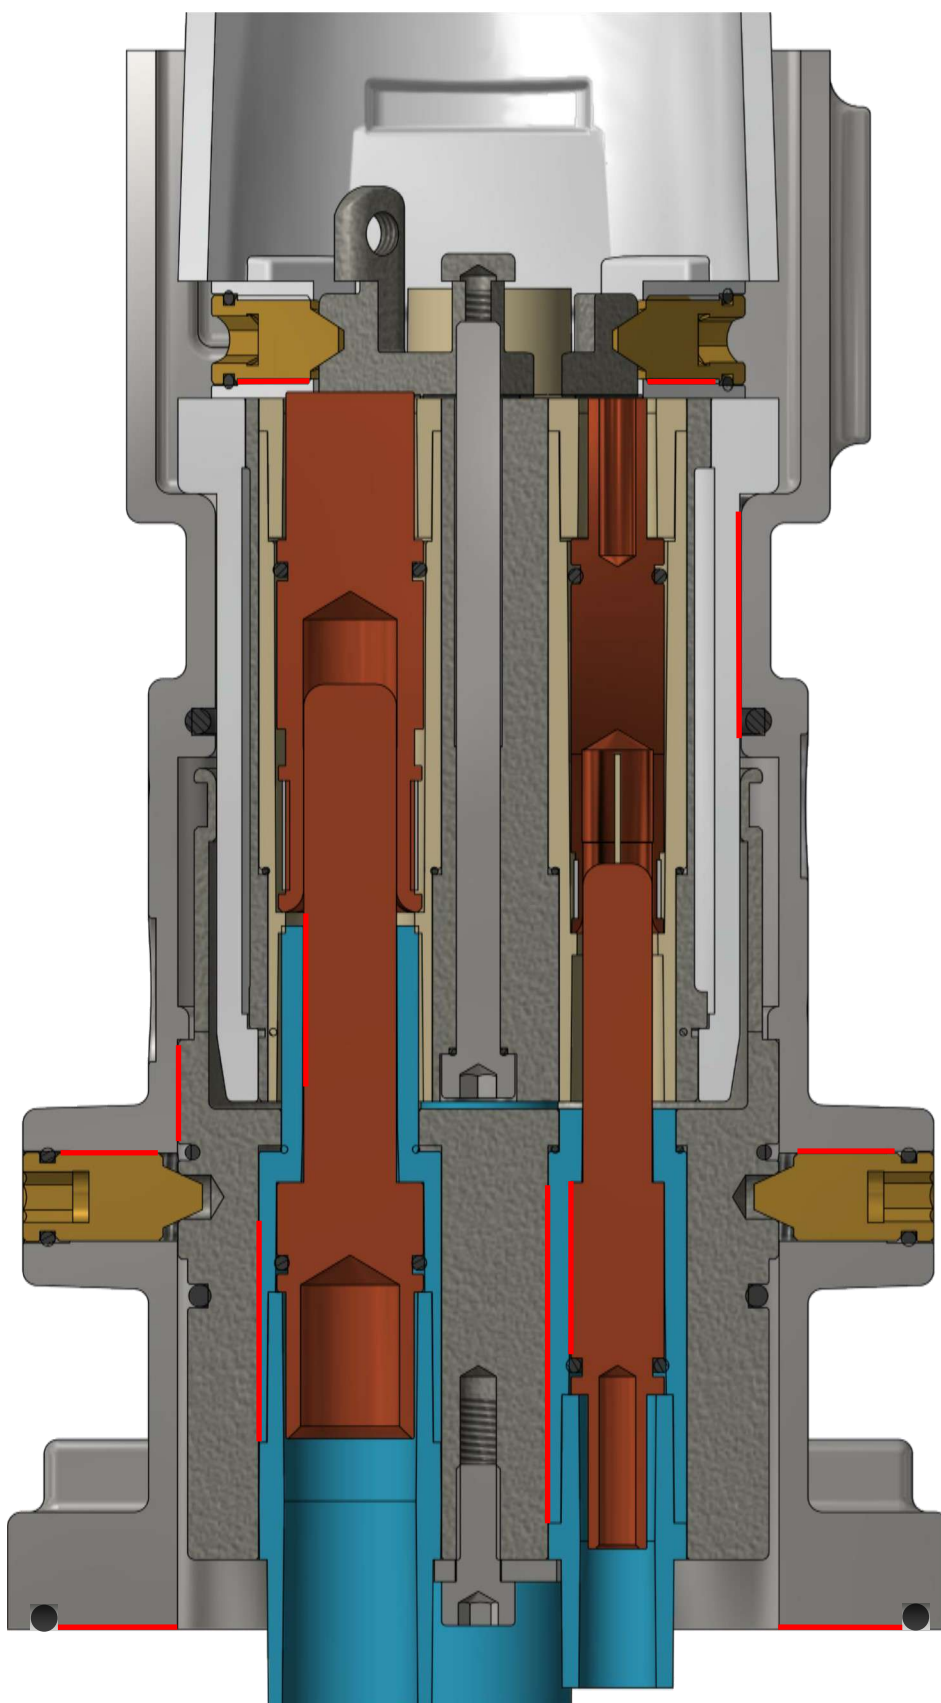

AUSPROOF


Flamepath Detail

300A-425A

Legend	
	Flamepath
	Plug Insulators
	Plug Body
	Receptacle Body
	Receptacle Insulators
	Contacts
	Cage
	Cage Locking Screw

Flamepaths are not intended to be repaired. For further specifications on Flamepath joints, contact manufacturer for dimensions and tolerances.

Plug and Receptacle Disengagement Order
Pilot/Auxiliary – Phase
Contacts – Scraping Earth
– Flameproof Path.
 Pilot disengages first providing electrical insulation of phase during disconnection sequence.

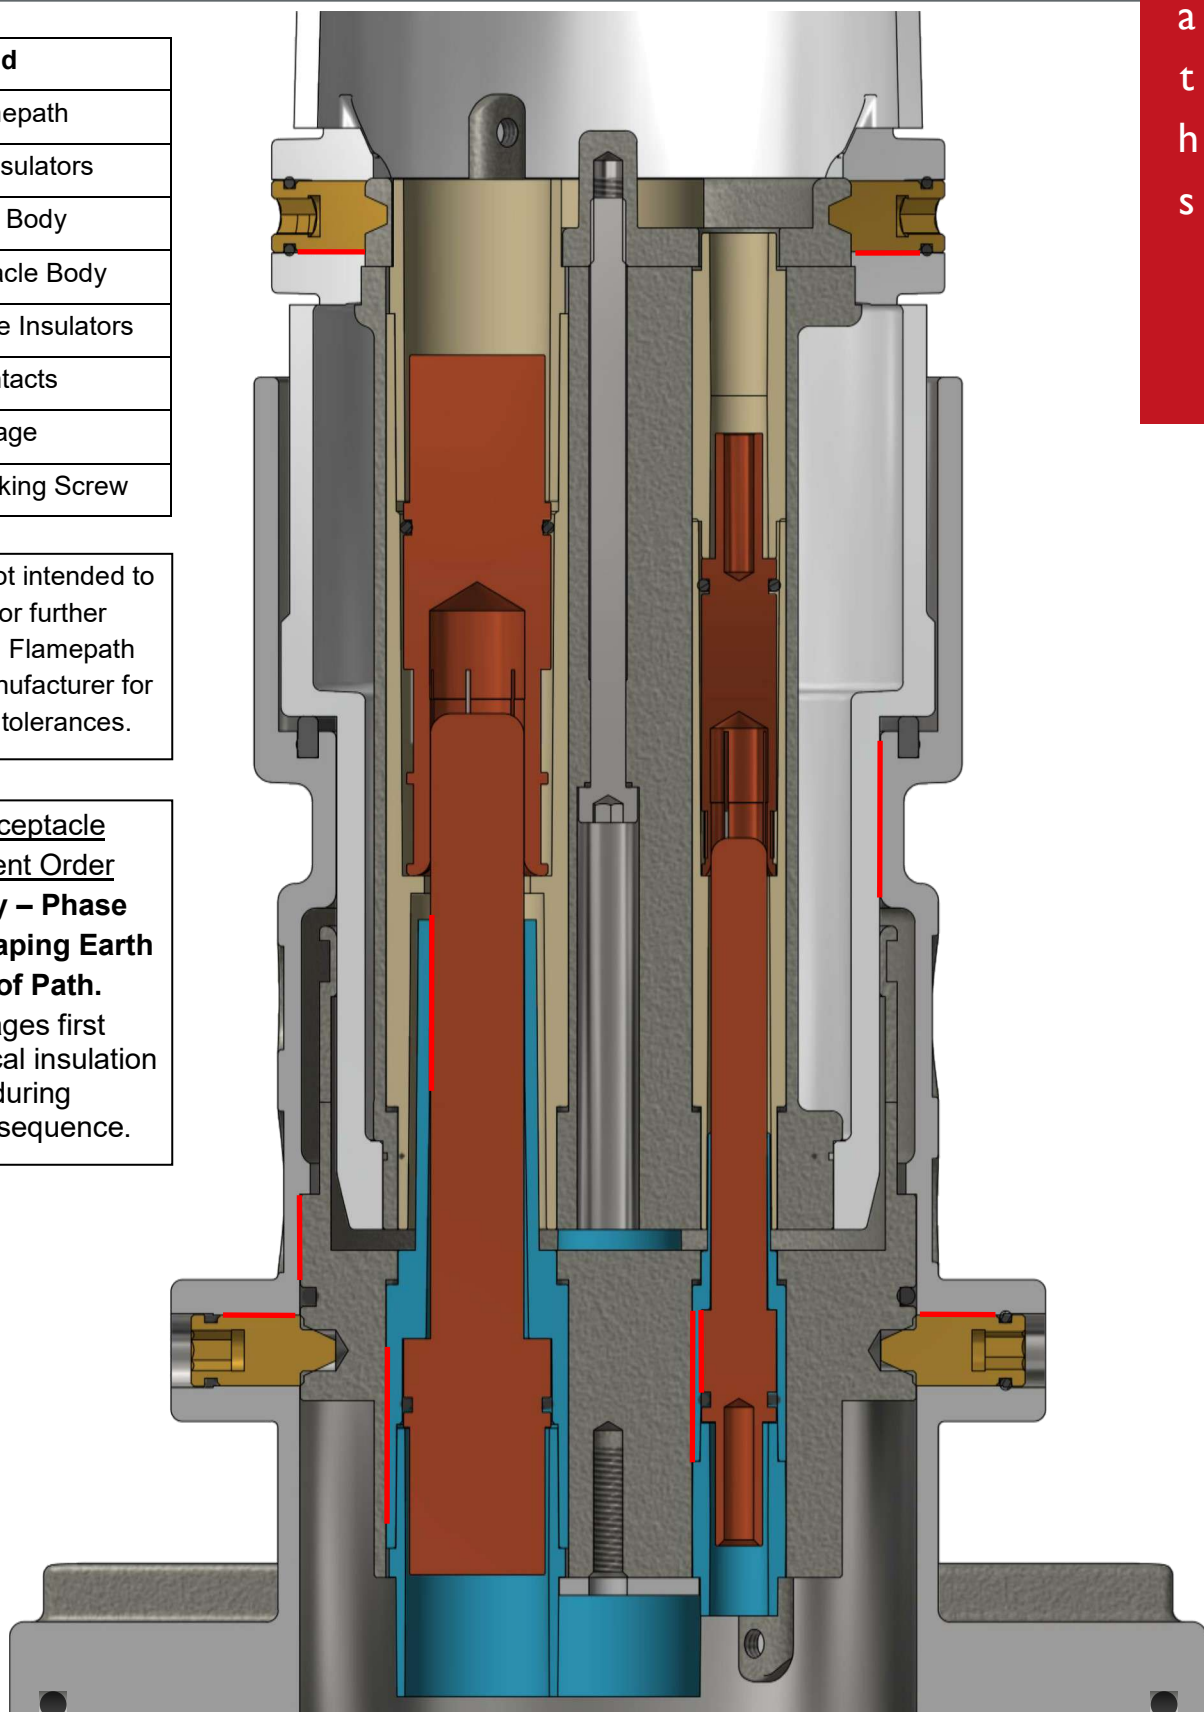


Plug and Receptacle System

To ensure the safe operation of the plug and receptacles, personnel should be aware of minimal ongoing care and maintenance.


- When cables are not in use, ensure that protective covers have been fitted to provide adequate sealing against moisture and dust.
- The plugs and receptacles should never be used as a towing or anchor point.
- Inspect plug and receptacle to ensure no parts are missing, if parts are missing it is deemed unsafe for use.
- Inspect insertion end of plug and entry of receptacle to ensure there is no damage, as damage could compromise the flame path protection.
- Before connection inspect sealing ring in receptacle to ensure they are located correctly into groove.
- Before connection of plug and receptacle ensure connecting pins are not bent from previous misuse or incorrect assembly.
- Ensure plug has been inserted fully into receptacle before energizing.
- If witness marks are used, make sure they are brightly painted on the sheath, located where the cable enters the gland. This needs to be routinely inspected to check if a gap appears between the end of the gland and the witness mark. A gap may indicate that the cable has been under tension and that the termination in the coupler may have moved.
- Maximum Surface Temperature Less than 85°C



Locking Device Locations

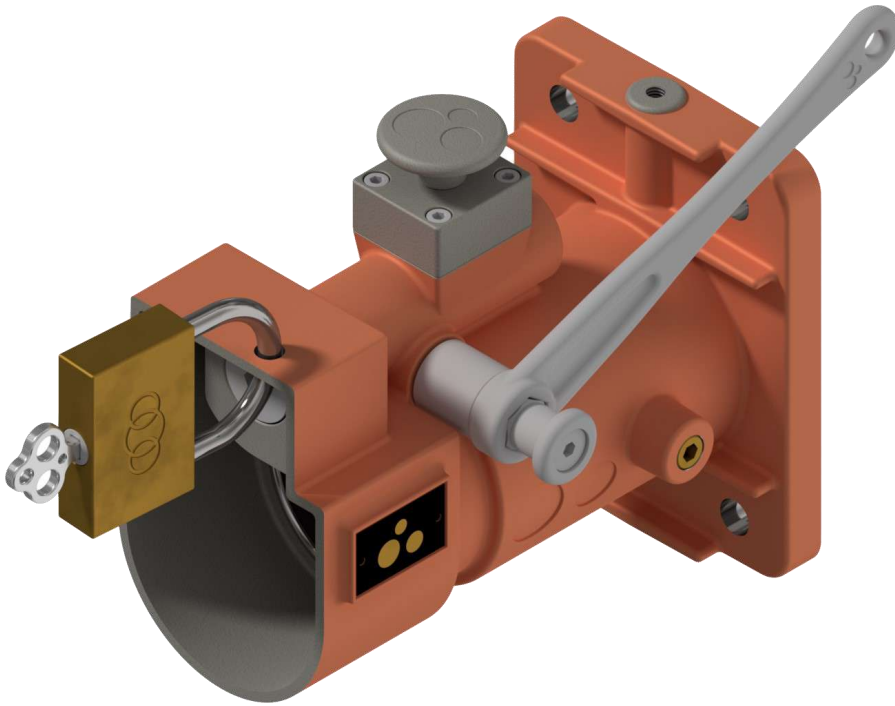

A Locking Device May Be Fitted To Prevent the Plug Being Removed or Inserted When In Service Or Maintenance

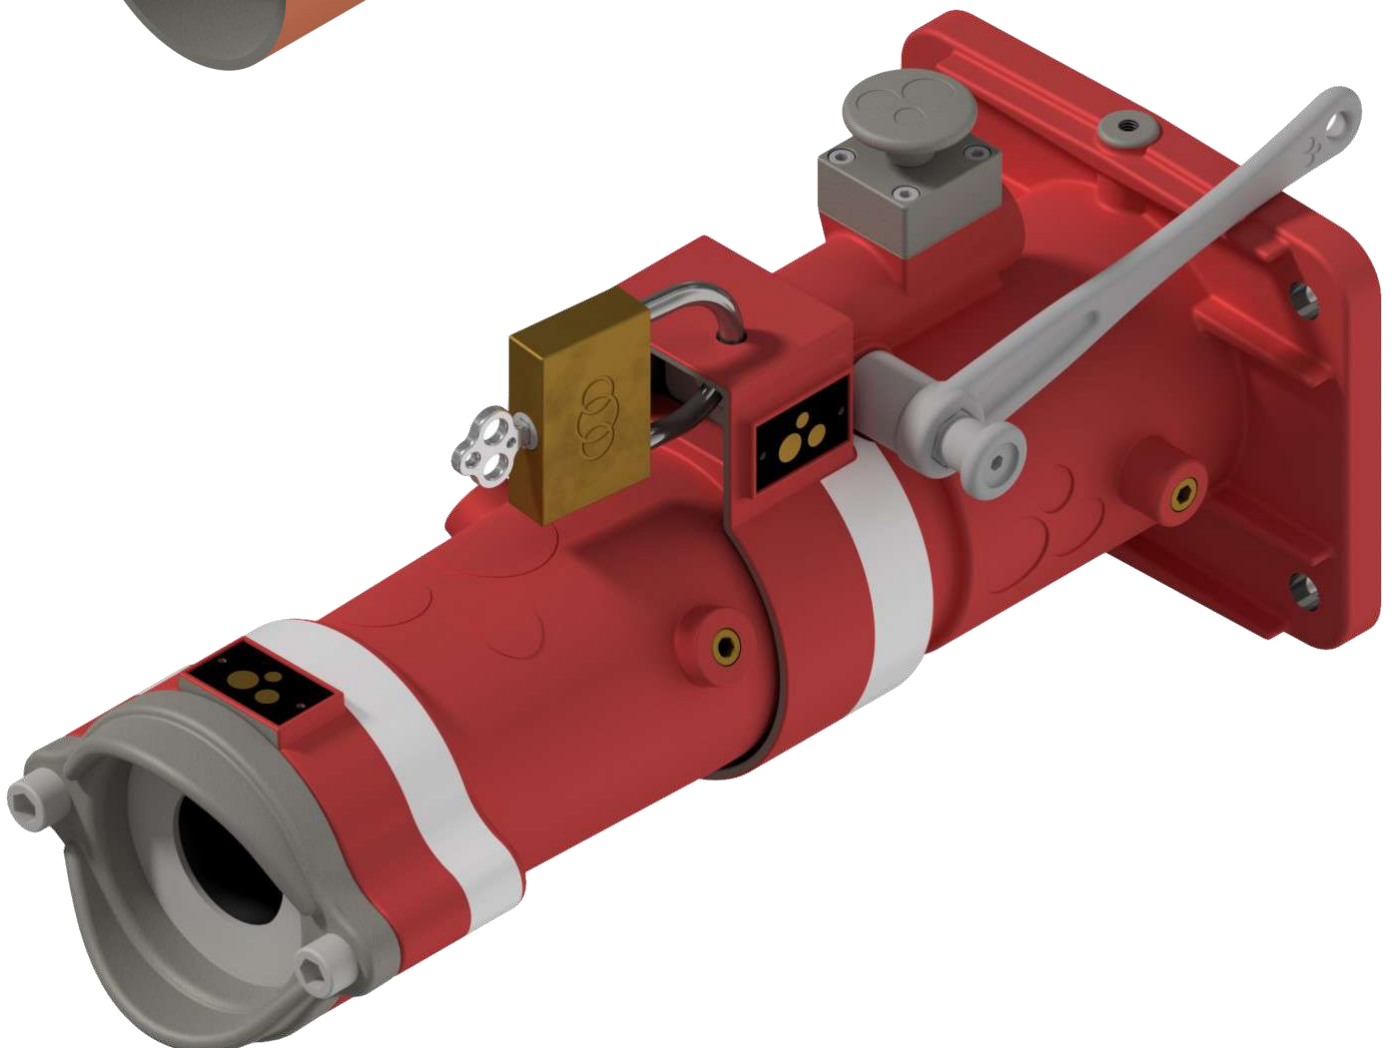


Plug Identification Labels



Notes

- Maximum Pilot Voltage for 150A Receptacle Not To Exceed 160V
- Ensure Plug And Receptacle Are Electrically Bonded And Earthed to Ensure Induced Voltages Are Not Developed
- Flameproof Joints Are Not Intended to Be Repaired: For Further Specifications On Flamepath Joints Contact The Original Manufacturer For Information On The Dimensions Of The Flameproof Joints
 - Plug and Receptacle Are Not To Be Separated When Energised

Receptacle Identification Labels

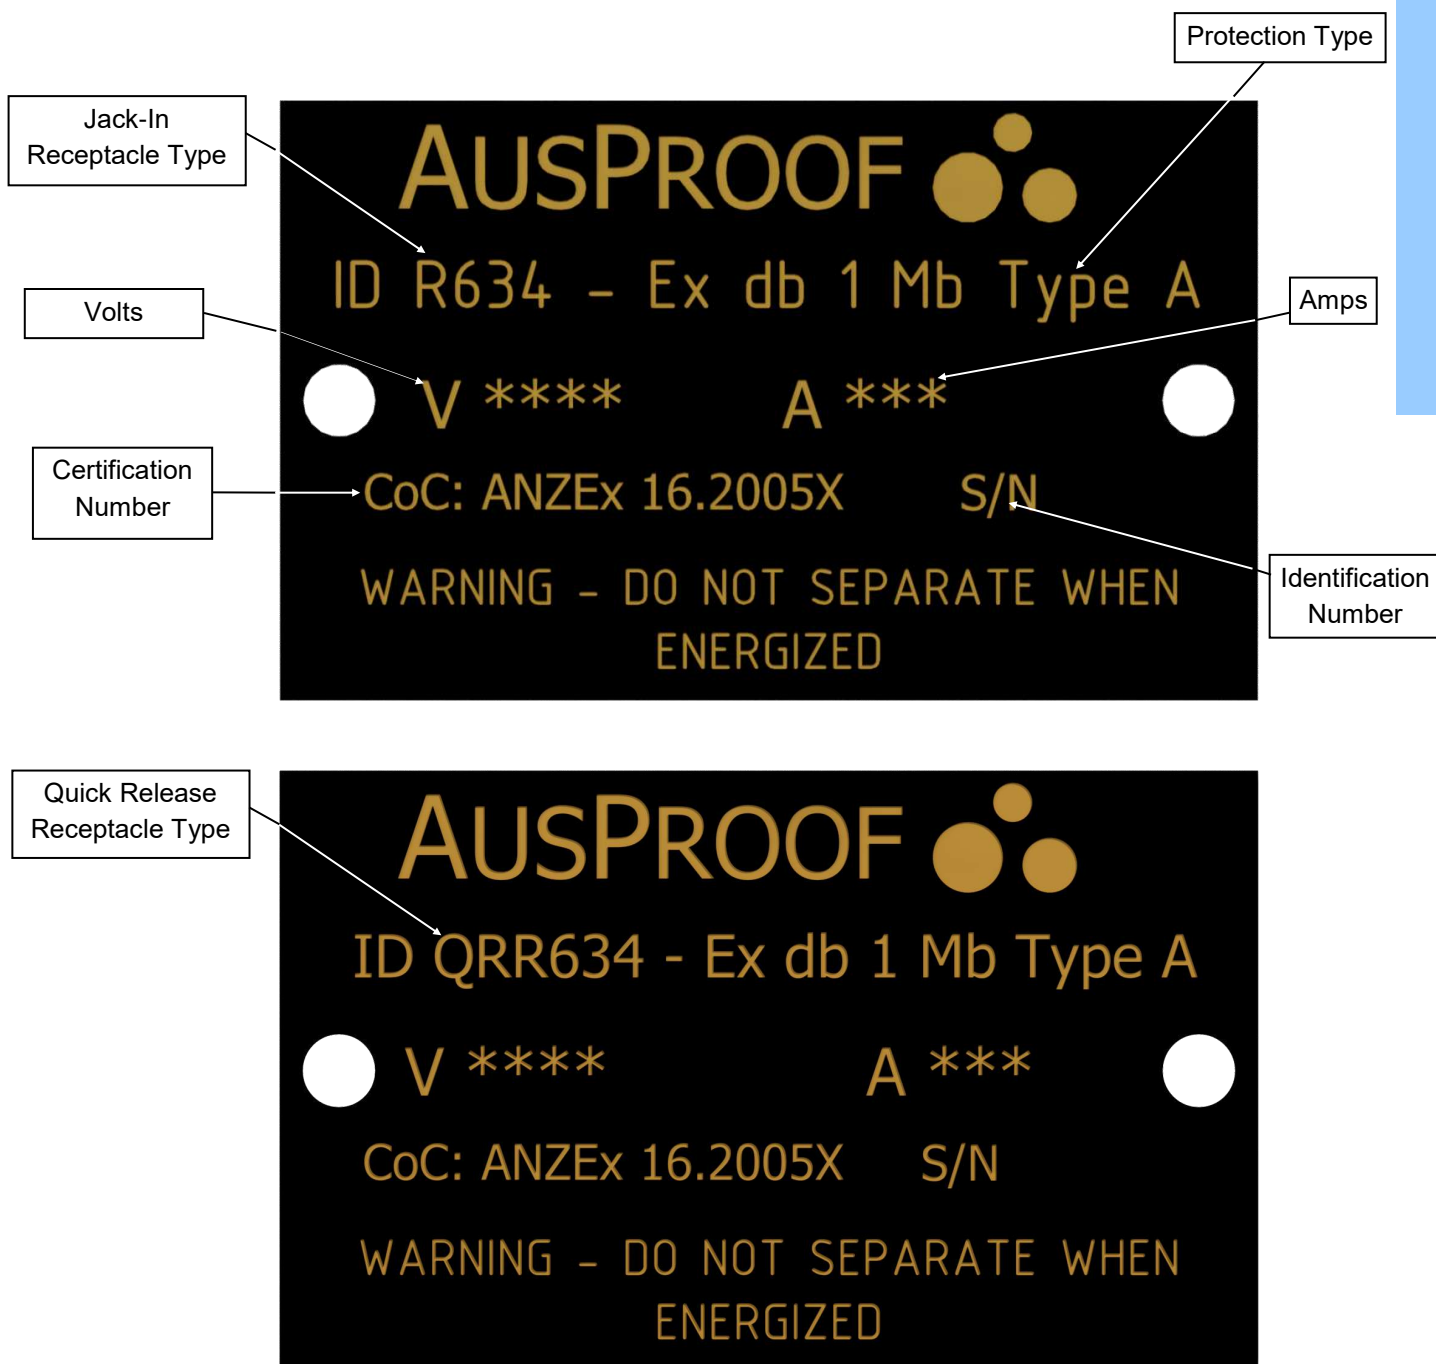

Notes

- Maximum Pilot Voltage for 150A Receptacle Not To Exceed 160V
- Ensure Plug And Receptacle Are Electrically Bonded And Earthed to Ensure Induced Voltages Are Not Developed
- Flameproof Joints Are Not Intended to Be Repaired: For Further Specifications On Flamepath Joints Contact The Original Manufacturer For Information On The Dimensions Of The Flameproof Joints
 - Plug and Receptacle Are Not To Be Separated When Energised

Glossary

1766	PSPL Guide Stick
3199	PS Silicone Plug Cover Cap
3202	PL Silicone Plug Cover Cap
RS1392	PS 660V 150A 4 Pin Plug (270) 25-C 35-40-G
RS1393	PA 660V 150A 4 Pin Plug (270) 35-C 40-45-G
RS1394	PS 600V 150A 4 Pin Plug (270) 50-C 45-50-G
RS1395	PS 600V 150A 4 Pin Plug (270) 70-C 50-55-G
RS1396	PS 600V 150A 4 Pin Plug (270) 95-C 55-60-G
RS1397	PS 660V 150A 4 Pin Receptacle (270) 25-C
RS1398	PS 660V 150A 4 Pin Receptacle (270) 35-C
RS1399	PS 660V 150A 4 Pin Receptacle (270) 50-C
RS1400	PS 660V 150A 4 Pin Receptacle (270) 70-C
RS1401	PS 660V 150A 4 Pin Receptacle (270) 95-C
RS1402	PS 1100V 150A 4 Pin Plug (90) 25-C 35-40-G
RS1403	PS 1100V 150A 4 Pin Plug (90) 35-C 40-45-G
RS1404	PS 1100V 150A 4 Pin Plug (90) 50-C 45-50-G
RS1405	PS 1100V 150A 4 Pin Plug (90) 70-C 50-55-G
RS1406	PS 1100V 150A 4 Pin Plug (90) 95-C 55-60-G
RS1407	PS 1100V 150A 4 Pin Receptacle (90) 25-C
RS1408	PS 1100V 150A 4 Pin Receptacle (90) 35-C
RS1409	PS 1100V 150A 4 Pin Receptacle (90) 50-C
RS1410	PS 1100V 150A 4 Pin Receptacle (90) 70-C
RS1411	PS 1100V 150A 4 Pin Receptacle (90) 95-C
RS1412	PL 660V 300A 4 Pin Plug (270) 16-C 30-35-G
RS1413	PL 660V 300A 4 Pin Plug (270) 25-C 35-40-G
RS1414	PL 660V 300A 4 Pin Plug (270) 35-C 40-45-G
RS1415	PL 600V 300A 4 Pin Plug (270) 50-C 45-50-G
RS1416	PL 600V 300A 4 Pin Plug (270) 70-C 50-55-G
RS1417	PL 600V 300A 4 Pin Plug (270) 95-C 55-60-G
RS1418	PL 660V 300A 4 Pin Plug (270) 120-C 60-65-G
RS1419	PL 600V 300A 4 Pin Plug (270) 150-C 65-70-G
RS1420	PL 600V 300A 4 Pin Plug (270) 185-C 70-75-G
RS1421	PL 660V 300A 4 Pin Receptacle (270) 16-C
RS1422	PL 660V 300A 4 Pin Receptacle (270) 25-C
RS1423	PL 660V 300A 4 Pin Receptacle (270) 35-C
RS1424	PL 600V 300A 4 Pin Receptacle (270) 50-C
RS1425	PL 600V 300A 4 Pin Receptacle (270) 70-C
RS1426	PL 600V 300A 4 Pin Receptacle (270) 95-C
RS1427	PL 660V 300A 4 Pin Receptacle (270) 120-C
RS1428	PL 600V 300A 4 Pin Receptacle (270) 150-C
RS1429	PL 600V 300A 4 Pin Receptacle (270) 185-C
RS1430	PL 660V 425A 4 Pin Plug (0) 16-C 30-35-G
RS1431	PL 660V 425A 4 Pin Plug (0) 25-C 35-40-G
RS1432	PL 660V 425A 4 Pin Plug (0) 35-C 40-45-G

RS1433	PL 600V 425A 4 Pin Plug (0) 50-C 45-50-G
RS1434	PL 600V 425A 4 Pin Plug (0) 70-C 50-55-G
RS1435	PL 600V 425A 4 Pin Plug (0) 95-C 55-60-G
RS1436	PL 660V 425A 4 Pin Plug (0) 120-C 60-65-G
RS1437	PL 600V 425A 4 Pin Plug (0) 150-C 65-70-G
RS1438	PL 600V 425A 4 Pin Plug (0) 185-C 70-75-G
RS1439	PL 660V 425A 4 Pin Receptacle (180) 16-C
RS1440	PL 660V 425A 4 Pin Receptacle (180) 25-C
RS1441	PL 660V 425A 4 Pin Receptacle (180) 35-C
RS1442	PL 600V 425A 4 Pin Receptacle (180) 50-C
RS1443	PL 600V 425A 4 Pin Receptacle (180) 70-C
RS1444	PL 600V 425A 4 Pin Receptacle (180) 95-C
RS1445	PL 660V 425A 4 Pin Receptacle (180) 120-C
RS1446	PL 600V 425A 4 Pin Receptacle (180) 150-C
RS1447	PL 600V 425A 4 Pin Receptacle (180) 185-C
RS1448	PL 1100V 300A 4 Pin Plug (90) 16-C 30-35-G
RS1449	PL 1100V 300A 4 Pin Plug (90) 25-C 35-40-G
RS1450	PL 1100V 300A 4 Pin Plug (90) 35-C 40-45-G
RS1451	PL 1100V 300A 4 Pin Plug (90) 50-C 45-50-G
RS1452	PL 1100V 300A 4 Pin Plug (90) 70-C 50-55-G
RS1453	PL 1100V 300A 4 Pin Plug (90) 95-C 55-60-G
RS1454	PL 1100V 300A 4 Pin Plug (90) 120-C 60-65-G
RS1455	PL 1100V 300A 4 Pin Plug (90) 150-C 65-70-G
RS1456	PL 1100V 300A 4 Pin Plug (90) 185-C 70-75-G
RS1457	PL 1100V 300A 4 Pin Receptacle (90) 16-C
RS1458	PL 1100V 300A 4 Pin Receptacle (90) 25-C
RS1459	PL 1100V 300A 4 Pin Receptacle (90) 35-C
RS1460	PL 1100V 300A 4 Pin Receptacle (90) 50-C
RS1461	PL 1100V 300A 4 Pin Receptacle (90) 70-C
RS1462	PL 1100V 300A 4 Pin Receptacle (90) 95-C
RS1463	PL 1100V 300A 4 Pin Receptacle (90) 120-C
RS1464	PL 1100V 300A 4 Pin Receptacle (90) 150-C
RS1465	PL 1100V 300A 4 Pin Receptacle (90) 185-C
RS1466	PL 1100V 300A 6 Pin Plug (90) 16-C 30-35-G
RS1467	PL 1100V 300A 6 Pin Plug (90) 25-C 35-40-G
RS1468	PL 1100V 300A 6 Pin Plug (90) 35-C 40-45-G
RS1469	PL 1100V 300A 6 Pin Plug (90) 50-C 45-50-G
RS1470	PL 1100V 300A 6 Pin Plug (90) 70-C 50-55-G
RS1471	PL 1100V 300A 6 Pin Plug (90) 95-C 55-60-G
RS1472	PL 1100V 300A 6 Pin Plug (90) 120-C 60-65-G
RS1473	PL 1100V 300A 6 Pin Plug (90) 150-C 65-70-G
RS1474	PL 1100V 300A 6 Pin Plug (90) 185-C 70-75-G
RS1475	PL 1100V 300A 6 Pin Receptacle (90) 16-C
RS1476	PL 1100V 300A 6 Pin Receptacle (90) 25-C

RS1477	PL 1100V 300A 6 Pin Receptacle (90) 35-C
RS1478	PL 1100V 300A 6 Pin Receptacle (90) 50-C
RS1479	PL 1100V 300A 6 Pin Receptacle (90) 70-C
RS1480	PL 1100V 300A 6 Pin Receptacle (90) 95-C
RS1481	PL 1100V 300A 6 Pin Receptacle (90) 120-C
RS1482	PL 1100V 300A 6 Pin Receptacle (90) 150-C
RS1483	PL 1100V 300A 6 Pin Receptacle (90) 185-C
RS1484	PL 1100V 425A 4 Pin Plug (180) 16-C 30-35-G
RS1485	PL 1100V 425A 4 Pin Plug (180) 25-C 35-40-G
RS1486	PL 1100V 425A 4 Pin Plug (180) 35-C 40-45-G
RS1487	PL 1100V 425A 4 Pin Plug (180) 50-C 45-50-G
RS1488	PL 1100V 425A 4 Pin Plug (180) 70-C 50-55-G
RS1489	PL 1100V 425A 4 Pin Plug (180) 95-C 55-60-G
RS1490	PL 1100V 425A 4 Pin Plug (180) 120-C 60-65-G
RS1491	PL 1100V 425A 4 Pin Plug (180) 150-C 65-70-G
RS1492	PL 1100V 425A 4 Pin Plug (180) 185-C 70-75-G
RS1493	PL 1100V 425A 4 Pin Receptacle (0) 16-C
RS1494	PL 1100V 425A 4 Pin Receptacle (0) 25-C
RS1495	PL 1100V 425A 4 Pin Receptacle (0) 35-C
RS1496	PL 1100V 425A 4 Pin Receptacle (0) 50-C
RS1497	PL 1100V 425A 4 Pin Receptacle (0) 70-C
RS1498	PL 1100V 425A 4 Pin Receptacle (0) 95-C
RS1499	PL 1100V 425A 4 Pin Receptacle (0) 120-C
RS1500	PL 1100V 425A 4 Pin Receptacle (0) 150-C
RS1501	PL 1100V 425A 4 Pin Receptacle (0) 185-C
RS1502	PL 1100V 425A 6 Pin Plug (0) 16-C 30-35-G
RS1503	PL 1100V 425A 6 Pin Plug (0) 25-C 35-40-G
RS1504	PL 1100V 425A 6 Pin Plug (0) 35-C 40-45-G
RS1505	PL 1100V 425A 6 Pin Plug (0) 50-C 45-50-G
RS1506	PL 1100V 425A 6 Pin Plug (0) 70-C 50-55-G
RS1507	PL 1100V 425A 6 Pin Plug (0) 95-C 55-60-G
RS1508	PL 1100V 425A 6 Pin Plug (0) 120-C 60-65-G
RS1509	PL 1100V 425A 6 Pin Plug (0) 150-C 65-70-G
RS1510	PL 1100V 425A 6 Pin Plug (0) 185-C 70-75-G
RS1511	PL 1100V 425A 6 Pin Receptacle (180) 16-C
RS1512	PL 1100V 425A 6 Pin Receptacle (180) 25-C
RS1513	PL 1100V 425A 6 Pin Receptacle (180) 35-C
RS1514	PL 1100V 425A 6 Pin Receptacle (180) 50-C
RS1515	PL 1100V 425A 6 Pin Receptacle (180) 70-C
RS1516	PL 1100V 425A 6 Pin Receptacle (180) 95-C
RS1517	PL 1100V 425A 6 Pin Receptacle (180) 120-C
RS1518	PL 1100V 425A 6 Pin Receptacle (180) 150-C
RS1519	PL 1100V 425A 6 Pin Receptacle (180) 185-C
RS1520	PL 3300V 300A 4 Pin Plug (270) 16-C 30-35-G
RS1521	PL 3300V 300A 4 Pin Plug (270) 25-C 35-40-G
RS1522	PL 3300V 300A 4 Pin Plug (270) 35-C 40-45-G
RS1523	PL 3300V 300A 4 Pin Plug (270) 50-C 45-50-G
RS1524	PL 3300V 300A 4 Pin Plug (270) 70-C 50-55-G
RS1525	PL 3300V 300A 4 Pin Plug (270) 95-C 55-60-G
RS1526	PL 3300V 300A 4 Pin Plug (270) 120-C 60-65-G
RS1527	PL 3300V 300A 4 Pin Plug (270) 150-C 65-70-G

RS1528	PL 3300V 300A 4 Pin Plug (270) 185-C 70-75-G
RS1529	PL 3300V 300A 4 Pin Receptacle (270) 16-C
RS1530	PL 3300V 300A 4 Pin Receptacle (270) 25-C
RS1531	PL 3300V 300A 4 Pin Receptacle (270) 35-C
RS1532	PL 3300V 300A 4 Pin Receptacle (270) 50-C
RS1533	PL 3300V 300A 4 Pin Receptacle (270) 70-C
RS1534	PL 3300V 300A 4 Pin Receptacle (270) 95-C
RS1535	PL 3300V 300A 4 Pin Receptacle (270) 120-C
RS1536	PL 3300V 300A 4 Pin Receptacle (270) 150-C
RS1537	PL 3300V 300A 4 Pin Receptacle (270) 185-C
RS1538	PL 3300V 300A 6 Pin Plug (270) 16-C 30-35-G
RS1539	PL 3300V 300A 6 Pin Plug (270) 25-C 35-40-G
RS1540	PL 3300V 300A 6 Pin Plug (270) 35-C 40-45-G
RS1541	PL 3300V 300A 6 Pin Plug (270) 50-C 45-50-G
RS1542	PL 3300V 300A 6 Pin Plug (270) 70-C 50-55-G
RS1543	PL 3300V 300A 6 Pin Plug (270) 95-C 55-60-G
RS1544	PL 3300V 300A 6 Pin Plug (270) 120-C 60-65-G
RS1545	PL 3300V 300A 6 Pin Plug (270) 150-C 65-70-G
RS1546	PL 3300V 300A 6 Pin Plug (270) 185-C 70-75-G
RS1547	PL 3300V 300A 6 Pin Receptacle (270) 16-C
RS1548	PL 3300V 300A 6 Pin Receptacle (270) 25-C
RS1549	PL 3300V 300A 6 Pin Receptacle (270) 35-C
RS1550	PL 3300V 300A 6 Pin Receptacle (270) 50-C
RS1551	PL 3300V 300A 6 Pin Receptacle (270) 70-C
RS1552	PL 3300V 300A 6 Pin Receptacle (270) 95-C
RS1553	PL 3300V 300A 6 Pin Receptacle (270) 120-C
RS1554	PL 3300V 300A 6 Pin Receptacle (270) 150-C
RS1555	PL 3300V 300A 6 Pin Receptacle (270) 185-C
RS1556	PL 3300V 425A 4 Pin Plug (180) 16-C 30-35-G
RS1557	PL 3300V 425A 4 Pin Plug (180) 25-C 35-40-G
RS1558	PL 3300V 425A 4 Pin Plug (180) 35-C 40-45-G
RS1559	PL 3300V 425A 4 Pin Plug (180) 50-C 45-50-G
RS1560	PL 3300V 425A 4 Pin Plug (180) 70-C 50-55-G
RS1561	PL 3300V 425A 4 Pin Plug (180) 95-C 55-60-G
RS1562	PL 3300V 425A 4 Pin Plug (180) 120-C 60-65-G
RS1563	PL 3300V 425A 4 Pin Plug (180) 150-C 65-70-G
RS1564	PL 3300V 425A 4 Pin Plug (180) 185-C 70-75-G
RS1565	PL 3300V 425A 4 Pin Receptacle (0) 16-C
RS1566	PL 3300V 425A 4 Pin Receptacle (0) 25-C
RS1567	PL 3300V 425A 4 Pin Receptacle (0) 35-C
RS1568	PL 3300V 425A 4 Pin Receptacle (0) 50-C
RS1569	PL 3300V 425A 4 Pin Receptacle (0) 70-C
RS1570	PL 3300V 425A 4 Pin Receptacle (0) 95-C
RS1571	PL 3300V 425A 4 Pin Receptacle (0) 120-C
RS1572	PL 3300V 425A 4 Pin Receptacle (0) 150-C
RS1573	PL 3300V 425A 4 Pin Receptacle (0) 185-C
RS1574	PL 3300V 425A 6 Pin Plug (180) 16-C 30-35-G
RS1575	PL 3300V 425A 6 Pin Plug (180) 25-C 35-40-G
RS1576	PL 3300V 425A 6 Pin Plug (180) 35-C 40-45-G
RS1577	PL 3300V 425A 6 Pin Plug (180) 50-C 45-50-G
RS1578	PL 3300V 425A 6 Pin Plug (180) 70-C 50-55-G

Glossary

RS1579	PL 3300V 425A 6 Pin Plug (180) 95-C 55-60-G
RS1580	PL 3300V 425A 6 Pin Plug (180) 120-C 60-65-G
RS1581	PL 3300V 425A 6 Pin Plug (180) 150-C 65-70-G
RS1582	PL 3300V 425A 6 Pin Plug (180) 185-C 70-75-G
RS1583	PL 3300V 425A 6 Pin Receptacle (0) 16-C
RS1584	PL 3300V 425A 6 Pin Receptacle (0) 25-C
RS1585	PL 3300V 425A 6 Pin Receptacle (0) 35-C
RS1586	PL 3300V 425A 6 Pin Receptacle (0) 50-C
RS1587	PL 3300V 425A 6 Pin Receptacle (0) 70-C
RS1588	PL 3300V 425A 6 Pin Receptacle (0) 95-C
RS1589	PL 3300V 425A 6 Pin Receptacle (0) 120-C
RS1590	PL 3300V 425A 6 Pin Receptacle (0) 150-C
RS1591	PL 3300V 425A 6 Pin Receptacle (0) 185-C
RS1592	PS Comp Ring Kit 35 - 40 mm
RS1593	PS Comp Ring Kit 40 - 45 mm
RS1594	PS Comp Ring Kit 45 - 50 mm
RS1595	PS Comp Ring Kit 50 - 55 mm
RS1596	PS Comp Ring Kit 55 - 60 mm
RS1597	PS 12 /20 Crimp Tubes 25mm^2
RS1598	PS 12 /20 Crimp Tubes 35mm^2
RS1599	PS 12 /20 Crimp Tubes 50mm^2
RS1600	PS 12 /20 Crimp Tubes 70mm^2
RS1601	PS 12 /20 Crimp Tubes 95mm^2
RS1612	PS REC Contact Crimp Pins 25mm^2
RS1613	PS REC Contact Crimp Pins 35mm^2
RS1614	PS REC Contact Crimp Pins 50mm^2
RS1615	PS REC Contact Crimp Pins 70mm^2
RS1616	PS REC Contact Crimp Pins 95mm^2
RS1618	PL Comp Ring Kit 30-35mm
RS1619	PL Comp Ring Kit 35-40mm
RS1620	PL Comp Ring Kit 40-45mm
RS1621	PL Comp Ring Kit 45-50mm
RS1622	PL Comp Ring Kit 50-55mm
RS1623	PL Comp Ring Kit 55-60mm
RS1624	PL Comp Ring Kit 60-65mm
RS1625	PL Comp Ring Kit 65-70mm
RS1626	PL Comp Ring Kit 70-75mm
RS1627	PL Comp Ring Kit 75-80mm
RS1759	PL 660V 300A 4P Plug Orange Body Kit
RS1760	PL 660V 425A 4P Plug Orange wW Body Kit
RS1761	PL 1100V 300A 4P Plug Blue Body Kit
RS1762	PL 1100V 425A 4P Plug Blue wW Body Kit
RS1763	PL 1100V 300A 6P Plug Blue Body Kit
RS1764	PL 1100V 425A 6P Plug Blue wW Body Kit

RS1765	PL 3300V 300A 4P Plug Red Body Kit
RS1766	PL 3300V 425A 4P Plug Red wW Body Kit
RS1767	PL Large Black Rec Protective Bung
RS1768	PS Small Black Rec Protective Bung
RS1803	PS 1100V 150A 4P Plug Blue Body Kit
RS1804	PS 4 Pin Plug Cage KIT 25-95mm^2
RS1805	PS 1100V 150A 4P RECEP Blue Body Kit
RS1806	PS 4 Pin RECEP Cage KIT 25-95mm^2
RS1865	PS 660V 150A 4 Pin Plug Orange Body KIT
RS1866	PS 660V 150A 4 Pin RECEP Orange Body KIT
RS1902	PL 3300V 300A 6P Plug Red Body Kit
RS1903	PL 3300V 425A 6P Plug Red wW Body Kit
RS1904	PL 660V 300A 4P RECEP Orange Body Kit
RS1905	PL 660V 425A 4P RECEP Orange wW Body Kit
RS1906	PL 1100V 300A 4P RECEP Blue Body Kit
RS1907	PL 1100V 425A 4P RECEP Blue wW Body Kit
RS1908	PL 1100V 300A 6P RECEP Blue Body Kit
RS1909	PL 1100V 425A 6P RECEP Blue wW Body Kit
RS1910	PL 3300V 300A 4P RECEP Red Body Kit
RS1911	PL 3300V 425A 4P RECEP Red wW Body Kit
RS1912	PL 3300V 300A 6P RECEP Red Body Kit
RS1913	PL 3300V 425A 6P RECEP Red wW Body Kit
RS1914	PL 4 Pin Plug Cage KIT
RS1915	PL 6 Pin Plug Cage KIT
RS1916	PL 4 Pin Rec Cage KIT
RS1917	PL 6 Pin Rec Cage KIT
RS1924	PL 19 / 25 Crimp & Insul Set 4P 185 mm^2
RS1925	PL 19 / 25 Crimp & Insul Set 4P 150 mm^2
RS1926	PL 19 / 25 Crimp & Insul Set 4P 120 mm^2
RS1927	PL 19 / 25 Crimp & Insul Set 4P 95 mm^2
RS1928	PL 19 / 25 Crimp & Insul Set 4P 70 mm^2
RS1929	PL 19 / 25 Crimp & Insul Set 4P 50 mm^2
RS1930	PL 19 / 25 Crimp & Insul Set 4P 35 mm^2
RS1931	PL 19 / 25 Crimp & Insul Set 4P 25 mm^2
RS1932	PL 19 / 25 Crimp & Insul Set 4P 16 mm^2
RS1933	PL 16 / 25 Crimp & Insul Set 4P 16 mm^2
RS1934	PL 16 / 25 Crimp & Insul Set 4P 25 mm^2
RS1935	PL 16 / 25 Crimp & Insul Set 4P 35 mm^2
RS1936	PL 16 / 25 Crimp & Insul Set 4P 50 mm^2
RS1937	PL 16 / 25 Crimp & Insul Set 4P 70 mm^2
RS1938	PL 16 / 25 Crimp & Insul Set 4P 95 mm^2
RS1939	PL 16 / 25 Crimp & Insul Set 4P 120 mm^2
RS1940	PL 16 / 25 Crimp & Insul Set 4P 150 mm^2
RS1941	PL 16 / 25 Crimp & Insul Set 4P 185 mm^2

RS1942	PL 12 / 25 Crimp & Insul Set 6P 16 mm^2	RS2082	PL 16 \ 78 Contact Pin & Insul Set 4P 50 mm^2
RS1943	PL 12 / 25 Crimp & Insul Set 6P 25 mm^2	RS2083	PL 16 \ 78 Contact Pin & Insul Set 4P 70 mm^2
RS1944	PL 12 / 25 Crimp & Insul Set 6P 35 mm^2	RS2084	PL 16 \ 78 Contact Pin & Insul Set 4P 95 mm^2
RS1945	PL 12 / 25 Crimp & Insul Set 6P 50 mm^2	RS2085	PL 16 \ 78 Contact Pin & Insul Set 4P 120 mm^2
RS1946	PL 12 / 25 Crimp & Insul Set 6P 70 mm^2	RS2086	PL 16 \ 78 Contact Pin & Insul Set 4P 150 mm^2
RS1947	PL 12 / 25 Crimp & Insul Set 6P 95 mm^2	RS2087	PL 16 \ 78 Contact Pin & Insul Set 4P 185 mm^2
RS1948	PL 12 / 25 Crimp & Insul Set 6P 120 mm^2	RS2088	PL 12 \ 106 Contact Pin & Insul Set 6P 16 mm^2
RS1949	PL 12 / 25 Crimp & Insul Set 6P 150 mm^2	RS2089	PL 12 \ 106 Contact Pin & Insul Set 6P 25 mm^2
RS1950	PL 12 / 25 Crimp & Insul Set 6P 185 mm^2	RS2090	PL 12 \ 106 Contact Pin & Insul Set 6P 35 mm^2
RS1951	PL 16 / 25 Crimp & Insul Set 6P 16 mm^2	RS2091	PL 12 \ 106 Contact Pin & Insul Set 6P 50 mm^2
RS1952	PL 16 / 25 Crimp & Insul Set 6P 25 mm^2	RS2092	PL 12 \ 106 Contact Pin & Insul Set 6P 70 mm^2
RS1953	PL 16 / 25 Crimp & Insul Set 6P 35 mm^2	RS2093	PL 12 \ 106 Contact Pin & Insul Set 6P 95 mm^2
RS1954	PL 16 / 25 Crimp & Insul Set 6P 50 mm^2	RS2094	PL 12 \ 106 Contact Pin & Insul Set 6P 120 mm^2
RS1955	PL 16 / 25 Crimp & Insul Set 6P 70 mm^2	RS2095	PL 12 \ 106 Contact Pin & Insul Set 6P 150 mm^2
RS1956	PL 16 / 25 Crimp & Insul Set 6P 95 mm^2	RS2096	PL 12 \ 106 Contact Pin & Insul Set 6P 185 mm^2
RS1957	PL 16 / 25 Crimp & Insul Set 6P 120 mm^2	RS2097	PL 16 \ 106 Contact Pin & Insul Set 6P 16 mm^2
RS1958	PL 16 / 25 Crimp & Insul Set 6P 150 mm^2	RS2098	PL 16 \ 106 Contact Pin & Insul Set 6P 25 mm^2
RS1959	PL 16 / 25 Crimp & Insul Set 6P 185 mm^2	RS2099	PL 16 \ 106 Contact Pin & Insul Set 6P 35 mm^2
RS1960	PL 12 / 25 Crimp & Insul Set 4P 16 mm^2	RS2100	PL 16 \ 106 Contact Pin & Insul Set 6P 50 mm^2
RS1961	PL 12 / 25 Crimp & Insul Set 4P 25 mm^2	RS2101	PL 16 \ 106 Contact Pin & Insul Set 6P 70 mm^2
RS1962	PL 12 / 25 Crimp & Insul Set 4P 35 mm^2	RS2102	PL 16 \ 106 Contact Pin & Insul Set 6P 95 mm^2
RS1963	PL 12 / 25 Crimp & Insul Set 4P 50 mm^2	RS2103	PL 16 \ 106 Contact Pin & Insul Set 6P 120 mm^2
RS1964	PL 12 / 25 Crimp & Insul Set 4P 70 mm^2	RS2104	PL 16 \ 106 Contact Pin & Insul Set 6P 150 mm^2
RS1965	PL 12 / 25 Crimp & Insul Set 4P 95 mm^2	RS2105	PL 16 \ 106 Contact Pin & Insul Set 6P 185 mm^2
RS1966	PL 12 / 25 Crimp & Insul Set 4P 120 mm^2	RS2106	PL 12 \ 106 Contact Pin & Insul Set 4P 16 mm^2
RS1967	PL 12 / 25 Crimp & Insul Set 4P 150 mm^2	RS2107	PL 12 \ 106 Contact Pin & Insul Set 4P 25 mm^2
RS1968	PL 12 / 25 Crimp & Insul Set 4P 185 mm^2	RS2108	PL 12 \ 106 Contact Pin & Insul Set 4P 35 mm^2
RS1969	PS 660V 150A 4P Plug Orange FLP Removable Body	RS2109	PL 12 \ 106 Contact Pin & Insul Set 4P 50 mm^2
RS1970	PL 660V 300A 4P Plug Orange FLP Removable Body	RS2110	PL 12 \ 106 Contact Pin & Insul Set 4P 70 mm^2
RS1971	PL 660V 425A 4P Plug Orange wW FLP Removable Body	RS2111	PL 12 \ 106 Contact Pin & Insul Set 4P 95 mm^2
RS1972	PS 1100V 150A 4P Plug Blue FLP Removable Body	RS2112	PL 12 \ 106 Contact Pin & Insul Set 4P 120 mm^2
RS1973	PL 1100V 300A 4P Plug Blue FLP Removable Body	RS2113	PL 12 \ 106 Contact Pin & Insul Set 4P 150 mm^2
RS1974	PL 1100V 425A 4P Plug Blue wW FLP Removable Body	RS2114	PL 12 \ 106 Contact Pin & Insul Set 4P 185 mm^2
RS1975	PL 1100V 300A 6P Plug Blue FLP Removable Body	RS2117	PL 16 \ 106 Contact Pin & Insul Set 4P 16 mm^2
RS1976	PL 1100V 425A 6P Plug Blue wW FLP Removable Body	RS2118	PL 16 \ 106 Contact Pin & Insul Set 4P 25 mm^2
RS1977	PL 3300V 300A 4P Plug Red FLP Removable Body	RS2119	PL 16 \ 106 Contact Pin & Insul Set 4P 35 mm^2
RS1978	PL 3300V 425A 4P Plug Red wW FLP Removable Body	RS2120	PL 16 \ 106 Contact Pin & Insul Set 4P 50 mm^2
RS1979	PL 3300V 300A 6P Plug Red FLP Removable Body	RS2121	PL 16 \ 106 Contact Pin & Insul Set 4P 70 mm^2
RS1980	PL 3300V 425A 6P Plug Red wW FLP Removable Body	RS2122	PL 16 \ 106 Contact Pin & Insul Set 4P 95 mm^2
RS1989	PL 19 \ 78 Contact Pin & Insul Set 4P 16 mm^2	RS2123	PL 16 \ 106 Contact Pin & Insul Set 4P 120 mm^2
RS1990	PL 19 \ 78 Contact Pin & Insul Set 4P 25 mm^2	RS2124	PL 16 \ 106 Contact Pin & Insul Set 4P 150 mm^2
RS1991	PL 19 \ 78 Contact Pin & Insul Set 4P 35 mm^2	RS2125	PL 16 \ 106 Contact Pin & Insul Set 4P 185 mm^2
RS1992	PL 19 \ 78 Contact Pin & Insul Set 4P 50 mm^2	RS2129	PL 660V 300A 4 Pin Plug (270) 16-C 30-35-G
RS1993	PL 19 \ 78 Contact Pin & Insul Set 4P 70 mm^2	RS2130	PL 660V 300A 4 Pin Plug (270) 25-C 30-35-G
RS1994	PL 19 \ 78 Contact Pin & Insul Set 4P 95 mm^2	RS2131	PL 660V 300A 4 Pin Plug (270) 35-C 35-40-G
RS1995	PL 19 \ 78 Contact Pin & Insul Set 4P 120 mm^2	RS2132	PL 660V 300A 4 Pin Plug (270) 50-C 40-45-G
RS1996	PL 19 \ 78 Contact Pin & Insul Set 4P 150 mm^2	RS2133	PL 660V 425A 4 Pin Plug (270) 16-C 30-35-G
RS1997	PL 19 \ 78 Contact Pin & Insul Set 4P 185 mm^2	RS2134	PL 660V 425A 4 Pin Plug (270) 25-C 30-35-G
RS1998	PL 16 \ 78 Contact Pin & Insul Set 4P 16 mm^2	RS2135	PL 660V 425A 4 Pin Plug (270) 35-C 35-40-G
RS1999	PL 16 \ 78 Contact Pin & Insul Set 4P 25 mm^2	RS2136	PL 660V 425A 4 Pin Plug (270) 50-C 40-45-G
RS2081	PL 16 \ 78 Contact Pin & Insul Set 4P 35 mm^2	RS2137	PL 1100V 300A 4 Pin Plug (90) 16-C 30-35-G

Glossary

RS2138	PL 1100V 300A 4 Pin Plug (90) 25-C 30-35-G
RS2139	PL 1100V 300A 4 Pin Plug (90) 35-C 35-40-G
RS2140	PL 1100V 300A 4 Pin Plug (90) 50-C 40-45-G
RS2141	PL 1100V 425A 4 Pin Plug (180) 16-C 30-35-G
RS2142	PL 1100V 425A 4 Pin Plug (180) 25-C 30-35-G
RS2143	PL 1100V 425A 4 Pin Plug (180) 35-C 35-40-G
RS2144	PL 1100V 425A 4 Pin Plug (180) 50-C 40-45-G
RS2145	PL 1100V 300A 6 Pin Plug (90) 50-C 45-50-G
RS2146	PL 1100V 300A 6 Pin Plug (90) 70-C 50-55-G
RS2147	PL 1100V 300A 6 Pin Plug (90) 95-C 55-60-G
RS2148	PL 1100V 300A 6 Pin Plug (90) 120-C 65-70-G
RS2149	PL 1100V 300A 6 Pin Plug (90) 150-C 70-75-G
RS2150	PL 1100V 425A 6 Pin Plug (0) 50-C 45-50-G
RS2151	PL 1100V 425A 6 Pin Plug (0) 70-C 50-55-G
RS2152	PL 1100V 425A 6 Pin Plug (0) 95-C 55-60-G
RS2153	PL 1100V 425A 6 Pin Plug (0) 120-C 65-70-G
RS2154	PL 1100V 425A 6 Pin Plug (0) 150-C 70-75-G
RS2155	PL 3300V 300A 4 Pin Plug (270) 50-C 55-60-G
RS2156	PL 3300V 300A 4 Pin Plug (270) 70-C 60-65-G
RS2157	PL 3300V 300A 4 Pin Plug (270) 95-C 65-70-G
RS2158	PL 3300V 300A 4 Pin Plug (270) 120-C 70-75-G
RS2159	PL 3300V 300A 4 Pin Plug (270) 150-C 75-80-G
RS2160	PL 3300V 425A 4 Pin Plug (180) 50-C 55-60-G
RS2161	PL 3300V 425A 4 Pin Plug (180) 70-C 60-65-G
RS2162	PL 3300V 425A 4 Pin Plug (180) 95-C 65-70-G
RS2163	PL 3300V 425A 4 Pin Plug (180) 120-C 70-75-G
RS2164	PL 3300V 425A 4 Pin Plug (180) 150-C 75-80-G
RS2165	PL 3300V 300A 6 Pin Plug (270) 50-C 55-60-G
RS2166	PL 3300V 300A 6 Pin Plug (270) 70-C 60-65-G
RS2167	PL 3300V 300A 6 Pin Plug (270) 95-C 65-70-G
RS2168	PL 3300V 300A 6 Pin Plug (270) 120-C 70-75-G
RS2169	PL 3300V 300A 6 Pin Plug (270) 180-C 75-80-G
RS2170	PL 3300V 425A 6 Pin Plug (180) 50-C 55-60-G
RS2171	PL 3300V 425A 6 Pin Plug (180) 70-C 60-65-G
RS2172	PL 3300V 425A 6 Pin Plug (180) 95-C 65-70-G
RS2173	PL 3300V 425A 6 Pin Plug (180) 120-C 70-75-G
RS2174	PL 3300V 425A 6 Pin Plug (180) 150-C 75-80-G
RS2175	PL Comp Ring Kit 10-15mm
RS2176	PL Comp Ring Kit 15-20mm
RS2177	PL Comp Ring Kit 20-25mm
RS2178	PL Comp Ring Kit 25-30mm
RS2179	PS Comp Ring Kit 10 - 15 mm
RS2180	PS Comp Ring Kit 15 - 20 mm
RS2181	PS Comp Ring Kit 20 - 25 mm

RS2182	PS Comp Ring Kit 25 - 30 mm
--------	-----------------------------

Notes

This image shows a blank sheet of white paper with horizontal ruling lines. The lines are evenly spaced and extend across the width of the page. There are no margins, text, or other markings on the paper.

Notes

[illegible]

Notes

[illegible]



6 Shona Avenue

Gladstone

Queensland 4680

Phone: +61 7 49784000

Facsimile: +61 7 49785685